

1 Engineering analysis with probability boxes: a review on computational methods

2 Matthias G.R. Faes^{a,e}, Marco Daub^{b,c}, Stefano Marelli^b, Edoardo Patelli^{d,f}, Michael Beer^{e,f,g}

3 ^a*KU Leuven, Jan De Nayerlaan 5, 2860 Sint-Katelijne-Waver, Belgium. Email: matthias.faes@kuleuven.be*

4 ^b*ETH Zürich, Stefano-Frascini-Platz 5, 8093 Zürich, Switzerland*

5 ^c*Technical University of Munich, Arcistr. 21, 80333 Munich, Germany*

6 ^d*Strathclyde University, Department of Civil and Environmental Engineering,*

7 ^e*Institute for Risk and Reliability, Leibniz Universität Hannover, Callinstr. 34, 30167 Hannover, Germany*

8 ^f*Institute for Risk and Uncertainty and School of Engineering, University of Liverpool, Peach Street, Liverpool L69 7ZF,*
9 *UK*

10 ^g*International Joint Research Center for Engineering Reliability and Stochastic Mechanics, Tongji University, 1239 Siping*
11 *Road, Shanghai 200092, P.R. China*

12 Abstract

13 The consideration of imprecise probability in engineering analysis to account for missing, vague or incom-
14 plete data in the description of model uncertainties is a fast-growing field of research. Probability-boxes
15 (p-boxes) are of particular interest in an engineering context, since they offer a mathematically straight-
16 forward description of imprecise probabilities, as well as allow for an intuitive visualisation. In essence,
17 p-boxes are defined via lower and upper bounds on the cumulative distribution function of a random
18 variable whose exact probability distribution is unknown. However, the propagation of p-boxes on model
19 inputs towards bounds on probabilistic measures describing the uncertainty on the model responses is nu-
20 merically still very demanding, and hence is subject of intensive research. In order to provide an overview
21 on the available methods, this paper gives a state-of-the art review for the modelling and propagation of
22 p-boxes with a special focus on structural reliability analysis.

23 *Keywords:* imprecise probability, p-boxes, literature review, reliability analysis, surrogate modelling

24 1. Introduction

25 Numerical models give an unparalleled insight into the response of the structure under consideration
26 to a set of predefined loading conditions, and hence, allow for a largely virtualized design optimization
27 workflow. Examples of such models include finite element models of structures or thermal systems, but
28 also other numerical schemes aimed at approximating complex multi-physical systems from the nanoscopic
29 to the largest possible level can be considered. However, despite the highly detailed numerical predictions
30 that can be obtained, these results often do not achieve a satisfactory level of agreement with ‘reality’,
31 i.e., the actual physical behaviour of the considered continuum in the effective operational environment.
32 This discrepancy is caused by epistemic (reducible) and aleatory (caused by variation) uncertainty in
33 the model. Usually, a distinction between model form and parametric uncertainty is made, where the

34 former describes possibly unwarranted approximations of the mathematical description of reality, whereas
 35 the latter refers to discrepancies in the parameters of these models with respect to reality. This paper
 36 solely focuses on parametric uncertainties. In recent years, several highly performing methods based on
 37 stochastic analysis [1], fuzzy set theory and interval analysis [2] have been introduced in literature to
 38 account for these type of uncertainties in the model parameters \mathbf{x} . Also several authors compared the
 39 applicability of a selection of these techniques in applications such as Geotechnical engineering [3] or
 40 inverse uncertainty quantification for stochastic dynamics [4, 5].

41 1.1. Probabilistic analysis

42 Probabilistic analysis is a powerful and mature tool to deal with aleatory uncertainties in numerical
 43 analyses. In order to express aleatory uncertainty in the model parameters, they are usually modelled
 44 as random variables, denoted by $\mathbf{X} = (X_1, \dots, X_{n_x})$ with support domain $D_{\mathbf{X}} \subseteq D_x$. Their values are
 45 outcomes of a random experiment where a probability P can be assigned to \mathbf{X} taking a value within
 46 a specific measurable set that is a subset of $D_{\mathbf{X}}$. The probability that \mathbf{X} is less than or equal to \mathbf{x} is
 47 modelled as a joint cumulative distribution function (CDF) $F_{\mathbf{X}}(\mathbf{x}) = P(X_1 \leq x_1, \dots, X_{n_x} \leq x_{n_x})$ for
 48 $\mathbf{x} \in D_{\mathbf{X}}$. Its derivative is denoted by $f_{\mathbf{X}}$ and is known as the joint probability density function (PDF).
 49 Since the inputs of the model are represented by a random vector, it follows that the model responses
 50 become random variables \mathbf{Y} , which are distributed according to the (generally unknown) CDF $F_{\mathbf{Y}}$. Note
 51 that $F_{\mathbf{X}}$ and $F_{\mathbf{Y}}$ in general do not belong to the same family of distribution functions.

52 Let \mathcal{M} represent a function that maps a set of n_x input parameters $\mathbf{x} \in D_x \subseteq \mathbb{R}^{n_x}$, with D_x a set of
 53 feasible input parameters (e.g., non-negative Young's moduli or contact stiffness values), to a set of n_y
 54 output parameters $\mathbf{y} \in \mathbb{R}^{n_y}$ via following relationship:

$$\mathbf{y} = \mathcal{M}(\mathbf{x}), \quad (1)$$

55 where \mathcal{M} may represent numerical model that provides a discretized approximation of the continuum
 56 physics that describe the modelling problem at hand. Usually, given $f_{\mathbf{X}}$, an analyst is then interested in
 57 computing the expected value of some random variable $\mathcal{H}(\mathbf{X})$, i.e., $E[\mathcal{H}(\mathbf{X})]$. Here, E is the expected
 58 value operator and \mathcal{H} is a function defined on $D_{\mathbf{X}}$. Typically, in this context, \mathcal{H} is used to compute the
 59 n th central moments of \mathbf{Y} , with $n \in \mathbb{N}$. Hereto, \mathcal{H} represents the component-wise exponentiation of the
 60 model responses $\mathbf{y} = \mathcal{M}(\mathbf{x})$, i.e., $\mathcal{H}(\mathbf{x}) = \mathbf{y}^n$, or $\mathcal{H}(\mathbf{x}) = (\mathbf{y} - \boldsymbol{\mu}_{\mathbf{Y}})^n$ with $\boldsymbol{\mu}_{\mathbf{Y}} = E[\mathbf{Y}]$. In an engineering
 61 context, an analyst is mostly interested into whether their design, be it a structure, system or a complex
 62 network, will perform reliably given the uncertainties in their manufacturing and operating conditions.
 63 Usually, the probability of failure is estimated in this context to assess the reliability of their design.

64 The probability of failure can be computed as $p_f = P(\mathcal{M}(\mathbf{X}) \leq 0)$, where \mathcal{M} with $n_y = 1$ represents
65 a performance function that indicates whether the design failed ($\mathcal{M}(\mathbf{x}) \leq 0$) or not ($\mathcal{M}(\mathbf{x}) > 0$) for
66 $\mathbf{x} \in D_{\mathbf{X}}$. In this context, $\mathcal{H}(\mathbf{x})$ is defined as $\mathcal{H}(\mathbf{x}) = I_{\mathcal{M}}(\mathbf{x})$ with $I_{\mathcal{M}}$ the indicator function that has
67 value 1 in case $\mathcal{M}(\mathbf{x}) \leq 0$, $\mathbf{x} \in D_{\mathbf{X}}$, and 0 otherwise. Overall, the expected value of $\mathcal{H}(\mathbf{X})$ is determined
68 by evaluating the integral of the following form:

$$\mathcal{P} = \int_{D_{\mathbf{X}}} \mathcal{H}(\mathbf{x}) f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x}, \quad (2)$$

69 where the physical interpretation of $\mathcal{P} = E[\mathcal{H}(\mathbf{X})]$ depends on the definition of \mathcal{H} . For the remainder of
70 the paper, the notation \mathcal{H} is used to abstract the specific application (i.e., calculation of the moments or
71 failure probability approximation) from the method that is being discussed. While at first sight it might
72 be tempting to evaluate this integral using numerical quadrature schemes, such solutions become quickly
73 unfeasible with respect to the non-linearity of the limit state function and/or the number of considered
74 random variables [6], even though lower/upper bounds [7] or approximate solutions [8] exist in certain
75 cases. In general, even integrating just the joint PDF (i.e., $\mathcal{H} = 1$) is not so trivial by quadrature, as they
76 tend to be extremely non-linear, especially when the random variables are highly correlated. Therefore,
77 Eq. (2) is usually solved by asymptotic approximations [9] or advanced simulation methods such as subset
78 simulation [10], directional importance sampling [11] or the probability density evolution method [12] in
79 case of stochastic dynamics.

80 1.2. Imprecise probabilistic analysis

81 In most real-life applications, an analyst has only partial information about $F_{\mathbf{X}}$ or $f_{\mathbf{X}}$ due to the
82 presence of epistemic uncertainty. This is a result of the often imprecise, diffuse, fluctuating, incomplete
83 or vague nature of the available information. Moreover, the available information might be objective or
84 subjective and consist of collected data (e.g., via experiments or data mining) and theoretical knowledge
85 on the considered problem, but also expert opinions with different levels of trustworthiness [13]. Some
86 illustrations of such situations can be found in the benchmark study presented in [14]. In engineering
87 analysis, the main challenge is then to formulate suitable models that incorporate these various sources
88 of data in an objective way, without introducing unwarranted conclusions and/or ignoring significant
89 information to ensure that the calculated results do not deviate from reality. The class of imprecise prob-
90 abilistic approaches attempts to solve this general problem and includes a plethora of different methods,
91 including Bayesian methods [15, 16, 17, 18], random sets [19, 20, 21], sets of probability measures [22],
92 evidence theory-based methods (such as Dempster-Shafer Theory) [23, 24, 25, 26] and interval probabil-
93 ities [27] of which probability bounds methods [28] and fuzzy stochastic methods [29, 30] are extensions.

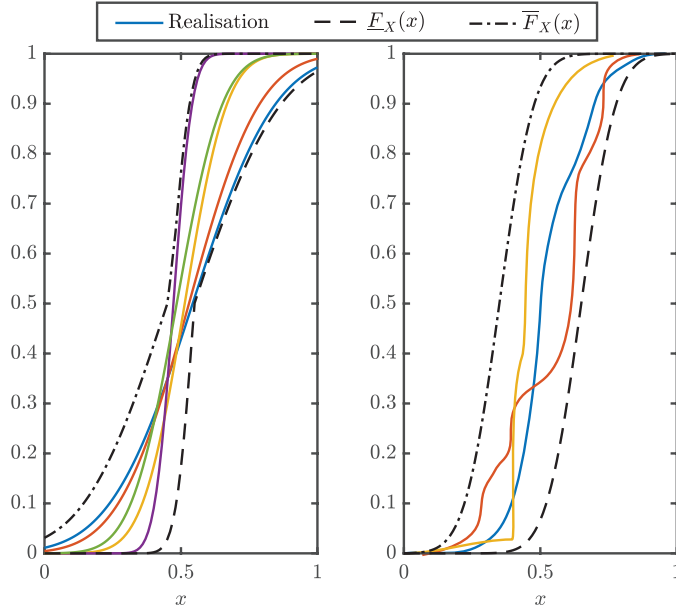


Figure 1: Illustration of parametric and distribution-free p-boxes. The black lines indicate the graphs of \bar{F}_X and \underline{F}_X , being the bounds on the p-boxes. The colored lines illustrate a set of admissible distribution functions for F_X that constitute the p-box.

94 Furthermore, a study of Monte Carlo methods for the general case of propagating imprecise probabilities
 95 is given for instance in [31] or [32]. Answering the question on which of these methods is the most ap-
 96 propriate method from this broad class of techniques is in general not possible as the most appropriate
 97 mathematical framework depends on the nature of the information that is available to the analyst. It
 98 should be noted that the application of the general framework of imprecise probability theory requires
 99 complex mathematical descriptions and methods. Furthermore, due to several restricting assumptions
 100 that are required, the methods are sometimes also very hard to translate to engineering practice. For a
 101 thorough treatment on the selection of the most appropriate method, the reader is referred to [13].

102 In many engineering applications, simplified imprecise probability models are often preferable for sim-
 103 pler utilization and representation. A popular representative thereof are **probability-boxes (p-boxes)**,
 104 which provide a set of possible probability distributions for F_X bounded by a lower CDF \underline{F}_X and an
 105 upper CDF \bar{F}_X . This type of credal set encompassing the unknown CDF is computationally efficient [33],
 106 easy to construct [34], and offers a simple graphical representation, see Fig. 1. This figure shows the
 107 two main types of p-boxes, being parametric and distribution-free p-boxes. Distribution-free p-boxes
 108 consider only the upper and lower CDF, and any CDF that complies with these bounds is admissible.
 109 Parametric p-boxes on the other hand impose additional constraints on admissible distribution functions,
 110 for instance by defining a family of distribution functions. A rigorous and more detailed definition of
 111 both types of p-boxes is given in Section 2.1.

112 Their simpler utilization and representation make the application of p-boxes particularly interesting

113 for engineering analysis. However note that even with all their benefits over other, more general, imprecise
114 probability models, computations involving p-boxes still require large computational budgets as they
115 incorporate effectively a set of probability distributions that all need to be accounted for. Hence, advanced
116 methods for p-box propagation have been subject to intense research over the past decades and various
117 efficient methods addressing numerous applications of different complexity were proposed. This paper
118 aims at giving an overview of a selection of promising approaches for the propagation of p-boxes in
119 engineering analysis. This is complemented by an introduction to p-boxes showing their relationship to
120 related imprecise probability models including their translation, and capabilities how to construct p-boxes
121 based on given information.

122 *1.3. A guideline to read this paper*

123 Depending on the need of the reader, this paper can be used in several ways. For instance, a newcomer
124 in the field of imprecise probabilities and/or p-boxes might use the entire manuscript to get the overall
125 ideas on the methods, as well as obtain the references to recent key works in the field. In this case, it is
126 recommended to consider all sections of the paper. On the other hand, an analyst that is knowledgeable
127 with imprecise probabilities, but is unsure how to model them based on available data will gain most
128 from the information in Section 3. Conversely, if an analyst is unsure which state-of-the-art propagation
129 method is best applicable for their problem, they are kindly referred to Section 4 and the references
130 therein included. To give the full overview; Section 2 describes the theoretical foundations of p-boxes
131 and their analysis. Section 3 discusses the construction of p-boxes based on various sources of information.
132 Section 4 highlights a selection of developments for the propagation of p-boxes, published during the last
133 few years and ends with a summarizing table. Finally, Section 5 lists the conclusions of this paper.

134 **2. Probability boxes**

135 In the following two sections, the case $n_x = 1$ is considered for notational simplicity. This is further-
136 more warranted since most engineering literature on the subject, as will be clear from Section 3, either
137 considers the univariate case of $n_x = 1$, or when $n_x > 1$ full independence among all X_i , $i = 1, \dots, n_x$,
138 with $F_{\mathbf{X}}(\mathbf{x}) = \prod_{i=1}^{n_x} F_{X_i}(x_i)$, $\mathbf{x} \in D_{\mathbf{X}}$. For more information on the general modeling of multivariate
139 p-boxes including dependence, the reader is referred to [35, 36].

140 *2.1. Theoretical background*

141 The main idea of a p-box is that there exist an unknown CDF F_X of the random variable X for
142 which only bounds can be provided. Thus, a p-box is described by a lower CDF $\underline{F}_X \in \mathbb{F}$ and an upper
143 CDF $\overline{F}_X \in \mathbb{F}$, where \mathbb{F} expresses the set of all CDFs on $D_X \subseteq \mathbb{R}$. These CDFs are collected as a pair

144 $[\underline{F}_X, \overline{F}_X]$ which yields a set of possible CDFs $\{F_X \in \mathbb{F} \mid \underline{F}_X(x) \leq F_X(x) \leq \overline{F}_X(x), x \in D_X\}$ for the
145 unknown CDF of X . The definition of a p-box corresponds to defining a lower probability \underline{P} and upper
146 probability \overline{P} on events $\{X \leq x\} = (-\infty, x] \cap D_X$, i.e., $\underline{P}(X \leq x) = \underline{F}_X(x)$ and $\overline{P}(X \leq x) = \overline{F}_X(x)$
147 for $x \in D_X$, which yields a credal set of probability measures. Via the p-box framework, the epistemic
148 uncertainty that comes for example from incomplete data on $F_X(x)$ is accounted for by assigning an
149 interval $[\underline{F}_X(x), \overline{F}_X(x)]$ for each value of $x \in \mathbb{R}$, see [34]. In case sufficient high quality information over
150 the entire range of possible values for x is available to the analyst, $[\underline{F}_X(x), \overline{F}_X(x)]$ will be a tight interval,
151 and the p-box will be close to a crisp (deterministic) distribution. Otherwise, when less information is
152 available, the bounds may become wider to acknowledge weaker confidence in the results. In case no
153 further assumptions are made concerning the set of possible CDFs, this type of p-box is also denoted a
154 **distribution-free p-box**. This is the most general type of p-box, which allows for the highest flexibility
155 when modelling parameters subject to aleatory and epistemic uncertainty, since any non-decreasing and
156 right-continuous function that is consistent with these bounds is admissible. Indeed, it can be shown
157 that crisp values, intervals and crisp probability distributions are all special cases of the distribution-free
158 p-box [28]. As a final note, since distribution-free p-boxes are so general in their definition, also CDFs
159 that are questionable from a physical perspective are explicitly included in the definition.

160 Besides distribution-free p-boxes, there are **parametric p-boxes**, which are described by a family
161 of CDFs whose parameters $\theta_i \in \mathbb{R}$ are unknown up to the property that they must be contained within
162 intervals $[\underline{\theta}_i, \overline{\theta}_i]$, $i = 1, \dots, n_\theta$. These parameters describe specific distribution properties and are collected
163 in the vector $\boldsymbol{\theta} \in \mathbb{R}^{n_\theta}$. The Cartesian product of the intervals is also denoted as D_θ , i.e., it holds $\boldsymbol{\theta} \in D_\theta$.
164 Hence, a parametric p-box yields the set of possible CDFs $\{F_X(\cdot, \boldsymbol{\theta}) \in \mathbb{F} \mid \boldsymbol{\theta} \in D_\theta\}$ for the unknown CDF
165 of the random variable X . An example of a parametric p-box can be defined as the Gaussian distribution
166 family with parameters $\boldsymbol{\theta} = (\mu, \sigma)$ contained in $D_\theta = [\underline{\mu}_X, \overline{\mu}_X] \times [\underline{\sigma}_X, \overline{\sigma}_X]$. Parametric p-boxes have the
167 property to clearly distinguish between aleatory uncertainty, represented by the distribution family, and
168 epistemic uncertainty, represented by the intervals for the parameters $\boldsymbol{\theta}$. The upper and lower bounding
169 CDFs of a parametric CDF can be computed as

$$\underline{F}_X(x) = \min\{F_X(x, \boldsymbol{\theta}) \mid \boldsymbol{\theta} \in D_\theta\}, \quad (3)$$

$$\overline{F}_X(x) = \max\{F_X(x, \boldsymbol{\theta}) \mid \boldsymbol{\theta} \in D_\theta\} \quad (4)$$

170 for $x \in D_X$. Note that the distribution-free p-box defined by these bounds does not correspond to the
171 parametric p-box as the latter one is more restrictive in general, i.e. there are CDF within these bounds
172 not belonging to the family of the parametric p-box. Both types of p-boxes are illustrated in Fig. 1.

173 In order to account for more information about the shape of CDFs, such as an admissible distribu-

174 tion family, symmetry, or about bounds on one or more statistical moments of F_X , a p-box can also
 175 be described by a quintuple $(\overline{F}_X, \underline{F}_X, \mu_X^I, \sigma_X^I, \mathcal{F})$, see [13]. Here, the confidence interval of the mean
 176 value $\mu_x^I \subseteq [-\infty, \infty]$, the confidence interval $\sigma_x^I \subseteq [0, \infty]$ of the standard deviation, and the family of
 177 admissible CDFs $\mathcal{F} \subseteq \mathbb{F}$ can be specified. Note that a distribution-free p-box can also be represented
 178 as a quintuple, noted $(\overline{F}_X, \underline{F}_X, [-\infty, +\infty], [0, \infty], \mathbb{F})$. Furthermore, the p-box framework was also re-
 179 cently extended to account for imprecision in stochastic processes by explicitly accounting for additional
 180 epistemic uncertainty in the process' autocorrelation structure [37, 38].

181 In the following subsections, the connection of p-boxes to some closely related uncertainty models for
 182 imprecise probabilities is demonstrated. This may help the reader in both understanding the similarities
 183 and differences between p-boxes and these models and converting them into p-boxes or vice versa.

184 2.2. Hierarchical probabilistic models

185 An alternative approach to deal with parametric p-boxes is to apply hierarchical probabilistic models.
 186 Following this approach, the epistemic uncertainty related to the parameters θ of the CDF $F_X(\cdot, \theta)$ are
 187 represented using a random variable Θ with distribution F_Θ . On the one hand, hierarchical probabilistic
 188 models can be regarded as a special case of a p-box where intervals are used to bound possible values of
 189 θ . According to possibility theory, these intervals encode the set of all distribution functions bounded by
 190 the interval. As such, selecting a single distribution function out of this set introduces knowledge into the
 191 analysis that might not be fully objective. On the one hand, parametric p-boxes might be constructed
 192 using credible intervals from Bayesian methods along with hierarchical probabilistic models, see Section
 193 3.4. In this case, p-boxes describe an excerpt of this modelling where the tails of F_Θ are neglected.

194 Using hierarchical probabilistic models, the effect of the epistemic uncertainty on the probabilis-
 195 tic measure under consideration depends on the applied propagation schemes. For instance, when re-
 196 weighting schemes such as presented in [39, 40, 41] are applied to infer the bounds, this is not problematic
 197 since they allow for a clear separation between aleatory and epistemic uncertainty. In these types of meth-
 198 ods, the distribution F_Θ is a purely instrumental tool to determine a functional relationship between \mathcal{P}
 199 and θ , the influence of which is integrated out of the result in later stages of the analysis, see Section 4.
 200 However, when this single distribution is used to make strong inference on the bounds of \mathcal{P} , e.g., via
 201 sampling, this will lead to inherent bias on the results of the analysis.

202 2.3. Random sets

203 A p-box can be regarded as a special case of a random set, which has important implications for
 204 some of the propagation methods explained in Section 4. To see this, consider a probability space
 205 $(\Omega, \mathcal{F}_\Omega, P_\Omega)$ and a subset \mathcal{K}_X of the power set of $D_X \subseteq X$. A random set Γ_X is then a mapping

206 $\Gamma_X : \Omega \rightarrow \mathcal{K}_X, \alpha \mapsto \Gamma_X(\alpha)$, where each $\Gamma_X(\alpha) \in \mathcal{K}_X, \alpha \in \Omega$, is called a focal element. When distribution-
 207 free p-boxes are defined as $\Gamma_X(\alpha) = [\overline{F}_X^{-1}(\alpha), \underline{F}_X^{-1}(\alpha)]$ for $\alpha \in \Omega$ and $\Omega = [0, 1]$ with uniform probability
 208 distribution, they are a specific case of random sets, see [42]. Furthermore note that for finite \mathcal{K}_X , random
 209 sets correspond to a Demspter-Shafer structures, see also [42].

210 Since a random set is not capable of representing a single parameterized distribution family, a direct
 211 relationship with parametric p-boxes cannot be established [43, 44]. Conversion is possible however by
 212 first converting the parametric p-box into a distribution-free p-box, see Eq. (3) and (4). Moreover, $\Gamma_X(\alpha)$
 213 can also be defined directly here via the inverse distributions of the family $F_X(\cdot, \boldsymbol{\theta}), \boldsymbol{\theta} \in D_{\boldsymbol{\theta}}$, i.e.,

$$\Gamma_X(\alpha) = \left[\min_{\boldsymbol{\theta} \in D_{\boldsymbol{\theta}}} F_X^{-1}(\alpha, \boldsymbol{\theta}), \max_{\boldsymbol{\theta} \in D_{\boldsymbol{\theta}}} F_X^{-1}(\alpha, \boldsymbol{\theta}) \right], \quad (5)$$

214 as shown in [44].

215 2.4. Fuzzy probabilities

216 An extension to the p-box is provided by fuzzy probabilities, which allow for considering a fuzzy set of
 217 probability models, each having their own level of plausibility according to the available information [3].
 218 According to this framework, the fuzzy membership function serves as an instrument to combine various
 219 plausible intervals $[\underline{F}_X^\alpha(x), \overline{F}_X^\alpha(x)], \alpha \in [0, 1]$, for $x \in D_X$ to define distribution-free p-boxes in a single
 220 scheme, and hence, allows for assessing the sensitivity of the bounds $\underline{\mathcal{P}}^\alpha$ and $\overline{\mathcal{P}}^\alpha$ of \mathcal{P} . Indeed, sensitivities
 221 of \mathcal{P} are found by considering the rate of change of the bounds on the interval with respect to the size of the
 222 input intervals represented in the fuzzy numbers. It holds $[\underline{F}_X^{\alpha_i}(x), \overline{F}_X^{\alpha_i}(x)] \subseteq [\underline{F}_X^{\alpha_j}(x), \overline{F}_X^{\alpha_j}(x)], x \in D_X$
 223 and therefore $[\underline{\mathcal{P}}^{\alpha_i}, \overline{\mathcal{P}}^{\alpha_i}] \subseteq [\underline{\mathcal{P}}^{\alpha_j}, \overline{\mathcal{P}}^{\alpha_j}]$ for $0 \leq \alpha_j \leq \alpha_i \leq 1$. Furthermore, the concept can be also applied
 224 to parametric p-boxes, see [45]. Here, the fuzzy membership function is used to assign an α -level to the
 225 parameters $\boldsymbol{\theta}$ of $F_X(\cdot, \boldsymbol{\theta})$. Then, the same analysis can be conducted as for distribution-free p-boxes. As
 226 the methods discussed further in the paper, which are developed for p-boxes, can always be applied to
 227 fuzzy probabilities in an α -cut sense, the latter are not discussed in more detail.

228 3. Construction of p-boxes for engineering analysis

229 This section provides an overview how distribution-free and parametric p-boxes can be constructed
 230 based on given information. Here, a distinction is made between the three types of information: incom-
 231 plete or imprecise distribution properties, datasets, or multiple sources of p-boxes. In the following, the
 232 focus is put on distribution-free p-boxes first. They are recommended when there is no knowledge in
 233 favour of a particular distribution family. If this information is available but the parameters $\boldsymbol{\theta}$ of $F_X(\cdot, \boldsymbol{\theta})$

234 are unknown, parametric p-boxes are preferred. A guide to find an appropriate construction method is
 235 provided in Table 1.

236 Furthermore note that distribution-free p-boxes can be always constructed as an approximation or
 237 an actual conversion of uncertainty models yielding lower and upper probabilities for events $X \leq x$, see
 238 Section 2. For a general introduction on the construction of p-boxes, the reader is referred to [34], where
 239 most of the approaches presented in the following are included. A comparison of selected methods can
 240 be found, e.g. in [46, 47].

Table 1: Overview of which sections in the paper provide an appropriate p-box construction method depending on the available information and p-box type.

type	distribution-free p-box	parametric p-box
incomplete distribution information	mean, variance, support: Sec. 3.1	parameters: Sec. 3.4.1
dataset	Sec. 3.2	Sec. 3.4.2
multiple sources	Sec. 3.3	

241 3.1. Incomplete distribution properties

242 In the case that only a limited number of distribution properties are known, like its shape or support,
 243 moments, or quantiles, various methods to construct a p-box are available, see [34]. These methods use
 244 the information about the distribution properties to derive proper bounds on the distribution. Often,
 245 they are based on well-known statistical inequalities. In the following, three methods addressing the
 246 support D_X and the first two moments of a random variable X are presented exclusively. These assume
 247 limited but precisely known distribution properties.

248 3.1.1. Support

249 If only the support of a distribution is known, the interval $D_X = [\underline{x}, \bar{x}]$ can be used as a representation
 250 in case the support is bounded. This corresponds to a p-box described by two unit step functions $H_{\underline{x}}$ and
 251 $H_{\bar{x}}$ at its minimum and maximum values \underline{x} and \bar{x} , i.e., $\underline{F}_X(x) = H_{\bar{x}}(x)$ and $\overline{F}_X(x) = H_{\underline{x}}(x)$ for $x \in D_X$.

252 3.1.2. Mean and variance

253 If the values of the mean μ_X and the variance σ_X^2 are known, the two-sided Chebyshev's inequality
 254 can be used to construct a p-box as described in [48], i.e.,

$$\underline{F}_X(x) = \begin{cases} 0 & \text{for } x < \mu + \sigma, \\ 1 - \frac{\sigma^2}{(x-\mu)^2}, & \text{for } x \geq \mu + \sigma, \end{cases} \quad (6)$$

$$\overline{F}_X(x) = \begin{cases} \frac{\sigma^2}{(x-\mu)^2}, & \text{for } x < \mu - \sigma, \\ 1, & \text{for } x \geq \mu - \sigma. \end{cases} \quad (7)$$

255 for $x \in D_X$. Instead of Chebyshev's inequality, Cantelli's inequality is used to construct a p-box based
 256 on the mean and variance in [49].

257 3.1.3. Mean, variance, and support

258 If both its bounded support D_X and its first two moments are known, the p-box bounds can be
 259 formulated as

$$F_X(x) = \begin{cases} 0 & \text{for } x \leq \mu + \frac{\sigma^2}{\mu - \bar{x}}, \\ 1 - \frac{b(1+a) - c - b^2}{a} & \text{for } \mu + \frac{\sigma^2}{\mu - \bar{x}} < x < \mu + \frac{\sigma^2}{\mu - \underline{x}}, \\ \frac{1}{1 + \frac{\sigma^2}{(x - \mu)^2}} & \text{for } \mu + \frac{\sigma^2}{\mu - \underline{x}} \leq x < \bar{x}, \\ 1 & \text{for } x \geq \bar{x}, \end{cases} \quad (8)$$

$$\bar{F}_X(x) = \begin{cases} 0 & \text{for } x \leq \underline{x}, \\ \frac{1}{1 + \frac{\sigma^2}{(x - \mu)^2}} & \text{for } \underline{x} < x \leq \mu + \frac{\sigma^2}{\mu - \bar{x}}, \\ 1 - \frac{b^2 - ab + c}{1 - a} & \text{for } \mu + \frac{\sigma^2}{\mu - \bar{x}} < x < \mu + \frac{\sigma^2}{\mu - \underline{x}}, \\ 1 & \text{for } x \geq \mu + \frac{\sigma^2}{\mu - \underline{x}}, \end{cases} \quad (9)$$

260 where $a = \frac{x - \underline{x}}{\bar{x} - \underline{x}}$, $b = \frac{\mu - \underline{x}}{\bar{x} - \underline{x}}$, $c = \frac{\sigma^2}{(\bar{x} - \underline{x})^2}$, see e.g. [50]. Eq. (8) and (9) are based on the one-sided Chebyshev's
 261 inequalities and are tighter compared to the bounds in Section 3.1.1 and 3.1.2.

262 3.2. Dataset

263 In case limited information about the probability distribution is available in form of a dataset $\mathcal{X} \subset$
 264 \mathbb{R}^{n_x} , the properties that are used in the methods of Section 3.1 can be estimated. In order to account for
 265 this estimation however, these methods need to be slightly adapted to inform the p-boxes, as described
 266 in [51, 49] for the sample mean and sample variance. Moreover, there are also methods which do not
 267 require an estimation of distribution properties for a given dataset: the methods of Kolmogorov-Smirnoff
 268 confidence bounds and robust Bayes. They are widely used in literature and are described briefly below.
 269 Note that data-based methods generally do not provide absolute bounds for p-boxes due to their nature,
 270 e.g. by using a confidence level smaller than 1 to avoid conservatism.

271 3.2.1. Distribution support estimation

272 In case very few data-points are available, estimating the bounds of the support of the p-box might
 273 be the only option for an analyst. This estimation can for instance be based on worst-case likelihood
 274 estimation [52], potentially in combination with Bayesian approaches [53]. Scenario optimization [54] can
 275 also be used in this context to obtain bounds with a proven degree of robustness under mild assumptions.

276 *3.2.2. Kolmogorov-Smirnoff confidence bounds*

277 Given a dataset \mathcal{X} with N samples, an empirical distribution $F_{\mathcal{X}}$ can be computed. Then, Kolmogorov-
 278 Smirnoff (K-S) confidence bounds for $F_{\mathcal{X}}$ define the bounds of a p-box as proposed in [34]. For $x \in D_{\mathcal{X}}$,
 279 it holds

$$\underline{F}_X(x) = \min(1, \max(0, F_{\mathcal{X}}(x) - D_N^\alpha)), \quad (10)$$

$$\overline{F}_X(x) = \min(1, \max(0, F_{\mathcal{X}}(x) + D_N^\alpha)), \quad (11)$$

280 where D_N^α is a K-S critical value at significance level α for a dataset with N samples which can be found
 281 in [55].

282 *3.2.3. Robust Bayes*

283 Furthermore, a p-box can be obtained by using robust Bayes methods, introduced by [56]. Here, the
 284 basic idea is to consider the parameters θ also as random variables expressed in Θ and to apply standard
 285 Bayesian inference to all plausible likelihood functions $L(\cdot, \mathcal{X})$ and all plausible prior distributions. Here,
 286 f_{Θ} denotes the PDF of the prior and $L(\cdot, \mathcal{X})$ is the likelihood of observing \mathcal{X} depending on the incorpo-
 287 rated distribution family $F_X(\cdot, \theta)$. This implies a class of posterior PDFs of Θ , denoted by $f_{\Theta}(\cdot|\mathcal{X})$, via
 288 Bayes theorem

$$f_{\Theta}(\theta|\mathcal{X}) = \frac{L(\mathcal{X}, \theta)}{\int_{D_{\Theta}} L(\mathcal{X}, \theta) f_{\Theta}(\theta) d\theta} f_{\Theta}(\theta) \quad (12)$$

289 and pairwise combination. Then, a p-box can be constructed by the envelope of all resulting CDFs using
 290 Bayesian point estimates, see [57], or credible intervals/regions like discussed in Section 3.4.2, see [46].
 291 Moreover, a Bayesian pointwise approach that considers specific percentiles of all resulting CDFs can be
 292 used for the construction of a p-box as well, see [58].

293 *3.3. Aggregation of p-boxes*

294 In the methods above, the intention was to obtain a p-box based-on given information. If there are
 295 already n_p p-boxes $[\underline{F}_X^{(j)}, \overline{F}_X^{(j)}]$ available to describe a single quantity, aggregation methods can be used.
 296 In the following, three popular methods, namely the envelope, intersection, and mixture strategy, are
 297 reviewed. For further methods, the reader is once again referred to [34].

298 *3.3.1. Envelope and intersection*

299 If there are multiple p-boxes of which it at least one encompasses the unknown CDF of X , but there is
 300 no information which p-boxes really encompass it, the envelope strategy can be used. Here, an envelope

301 p-box is defined as

$$\underline{F}_X(x) = \min\{\underline{F}_X^{(j)}(x) \mid j = 1, \dots, n_s\}, \quad (13)$$

$$\overline{F}_X(x) = \max\{\overline{F}_X^{(j)}(x) \mid j = 1, \dots, n_s\} \quad (14)$$

302 for $x \in D_X$. This corresponds to a conservative modelling. Opposite to the envelope strategy, there is
 303 the intersection strategy for which all available p-boxes are considered as reliable. Here, the intersection
 304 of all p-boxes is used, see [34]. For this strategy, the min and max operators in Eq. (13) and (14) are
 305 exchanged.

306 3.3.2. Mixture

307 If there are multiple p-boxes which were constructed for specific situations that suffer under variability,
 308 the mixture strategy can be used for the condensation in a single p-box. Here, the idea is to use weights
 309 $w_j > 0$ with $W = \sum_{j=1}^{n_s} w_j$ to express the relative frequencies. Then, the mixture p-box is defined as

$$\underline{F}_X(x) = \frac{1}{W} \sum_{j=1}^{n_s} w_j \underline{F}_X^{(j)}(x), \quad (15)$$

$$\overline{F}_X(x) = \frac{1}{W} \sum_{j=1}^{n_s} w_j \overline{F}_X^{(j)}(x) \quad (16)$$

310 for $x \in D_X$. A special case are even weights, e.g., $w_j = 1$, $j = 1, \dots, n_s$ with $W = n_s$, which correspond
 311 to an arithmetic averaging of the p-boxes.

312 3.4. Parametric p-box construction

313 In order to construct a parametric p-box, the distribution family must be known. Hence, the problem
 314 of constructing a p-box reduces to establishing bounding intervals for the corresponding parameters $\boldsymbol{\theta}$ of
 315 $F_X(\cdot, \boldsymbol{\theta})$. Usually, these intervals are assumed or estimated for a given dataset, see the methods below.
 316 Note that all methods to obtain a parametric p-box can be also used to build a distribution-free p-box
 317 by using Eq. (3) and (4) which yield the envelope of the parametric p-box.

318 3.4.1. Bounds on distribution parameters

319 In case bounds on the parameters $\boldsymbol{\theta}$ are available, e.g., from expert knowledge, the intervals for
 320 these parameters can be specified directly. For lower bounds $\underline{\theta}_i$ and an upper bounds $\overline{\theta}_i$, $i = 1, \dots, n_\theta$
 321 their domain is denoted by D_θ (see Section 2.1). If there are n_s sources that provide different intervals,
 322 aggregation methods similar to Section 3.3 could be used, e.g., an envelope of all candidate domains $D_\theta^{(j)}$,
 323 where $\underline{\theta}_i = \min\{\underline{\theta}_i^{(j)} \mid j = 1, \dots, n_s\}$ and $\overline{\theta}_i = \max\{\overline{\theta}_i^{(j)} \mid j = 1, \dots, n_s\}$, $i = 1, \dots, n_\theta$.

324 *3.4.2. Dataset*

325 Given a dataset \mathcal{X} , there are several methods to obtain interval estimates for the parameters $\boldsymbol{\theta}$
 326 of $F_X(\cdot, \boldsymbol{\theta})$. Popular methods comprise confidence intervals from classical statistics, which cover the
 327 unknown, but deterministic parameters with a probability α , or credible intervals from Bayesian statistics,
 328 in which the random vector Θ , representing the parameters of the CDF, can be found with a probability
 329 α , see [59] for further information on their computation. Note that in general independence between the
 330 parameters $\boldsymbol{\theta}$ needs to be assumed for $n_\theta > 1$ in order to obtain interval regions.

331 **4. Propagation methods for p-boxes**

332 This section discusses commonly applied numerical schemes for propagating p-boxes towards bounds
 333 on the n^{th} central moment of the model response to a load and/or the probability of failure of the
 334 designed structure, system or complex network. In the case where \mathbf{X} is represented as a p-box, a direct
 335 calculation of \mathcal{P} , as introduced in Eq. (2), is no longer possible since a set of PDFs that are consistent
 336 with the definition of the p-box has to be considered. Indeed, the consideration of a set of $f_{\mathbf{X}}$ causes
 337 the probabilistic measure \mathcal{P} to become set-valued, too. The solution of this problem requires dedicated
 338 numerical procedures, which are described in the proceeding sections.

339 *4.1. Double loop approaches*

340 In case \mathbf{X} represents a distribution-free p-box, the lower and upper bounds $\underline{\mathcal{P}} \leq \mathcal{P} \leq \overline{\mathcal{P}}$ can be
 341 obtained by solving the following optimization problems:

$$\underline{\mathcal{P}} = \min_{f_{\mathbf{X}}} \int_{D_{\mathbf{X}}} \mathcal{H}(\mathbf{x}) f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x} \quad (17)$$

342 and:

$$\overline{\mathcal{P}} = \max_{f_{\mathbf{X}}} \int_{D_{\mathbf{X}}} \mathcal{H}(\mathbf{x}) f_{\mathbf{X}}(\mathbf{x}) d\mathbf{x}. \quad (18)$$

343 Note that these optimization problems are potentially very complicated since the optimization has
 344 to be carried out over the set of all possible $f_{\mathbf{X}}$ consistent with the definition of the p-box. Hence, this
 345 constitutes a non-convex, discontinuous optimization problem, which are notoriously difficult to solve
 346 exactly. In certain cases, tighter bounds on \mathcal{P} can be obtained by means of linear programming, without
 347 having to construct the probability bounds of the input random variables [60, 61].

348 A first approach to simplify the optimization problems is to *slice* the p-box in order to transform
 349 the above problem into the propagation of a large number of intervals, each having a corresponding
 350 probability mass, which are then propagated through \mathcal{M} to infer bounds on \mathcal{P} . The propagation of
 351 intervals is a well-understood problem in the context of uncertainty propagation [2]. However, following

352 this approach the required number of evaluations of Eq. (1) scales exponentially with n_x [62]. This led to
 353 the development of methods such as interval Monte Carlo simulation [62] or interval-Quasi Monte Carlo
 354 simulation [63]. These methods manage to break this exponential scaling of the computational cost by
 355 bounding \mathcal{P} using following formulations:

$$\underline{\mathcal{P}} = \frac{1}{n} \sum_{k=1}^n \underline{\mathcal{H}}(\mathbf{r}_k), \quad (19)$$

$$\overline{\mathcal{P}} = \frac{1}{n} \sum_{k=1}^n \overline{\mathcal{H}}(\mathbf{r}_k) \quad (20)$$

356 with $\overline{\mathcal{H}}(\mathbf{r}_k)$ and $\underline{\mathcal{H}}(\mathbf{r}_k)$ defined as:

$$\overline{\mathcal{H}}(\mathbf{r}_k) = \max\{\mathcal{H}(\mathbf{x}) \mid \overline{F}_{\mathbf{X}}^{-1}(\mathbf{r}_k) \leq \mathbf{x} \leq \underline{F}_{\mathbf{X}}^{-1}(\mathbf{r}_k)\}, \quad (21)$$

$$\underline{\mathcal{H}}(\mathbf{r}_k) = \min\{\mathcal{H}(\mathbf{x}) \mid \overline{F}_{\mathbf{X}}^{-1}(\mathbf{r}_k) \leq \mathbf{x} \leq \underline{F}_{\mathbf{X}}^{-1}(\mathbf{r}_k)\}. \quad (22)$$

357 The parameters $\mathbf{r}_k, j = 1, \dots, N$ are realisations of a sample of N independent and identically dis-
 358 tributed (i.i.d.) random variables according to a multivariate standard uniform distribution. As is clear
 359 from these equations, a large number of model evaluations is still required to estimate of the bounds on
 360 \mathcal{P} with sufficiently small variance, especially since an interval propagation problem (Eq. (21)) has to be
 361 solved for each \mathbf{r}_k . Note that in the general case, this interval problem has to be solved using global
 362 optimization approaches to accommodate possible non-convexity in \mathcal{M} with respect to \mathbf{x} and/or $\boldsymbol{\theta}$ [64].
 363 Further improvement in computational efficiency can be obtained by resorting to efficient interval prop-
 364 agation schemes such as those based on Bernstein polynomials [65, 66], Cauchy deviates [28] (as recently
 365 applied in [67] and [68]), the transformation method [69] or Taylor series expansion methods [70, 71].
 366 Further improvements in terms of efficiency can be obtained by using saddle-point approximations, as
 367 introduced in [72]. A more general version of the interval Monte Carlo approach was introduced by
 368 Alvarez in [42, 73] based on random sets (see also subsection 2.3). The main advantage of considering
 369 the full random set is that this representation is more general, and hence, intervals and Dempster-Shafer
 370 structures can be considered as well in the same framework [74]. Furthermore, the framework allows for
 371 including efficient sampling schemes, such as e.g., subset simulation [74].

372 In the case of parametric p-boxes, the extrema represented by Eq.(17) and Eq.(18) can be determined
 373 directly since the set of all possible $f_{\mathbf{X}}$ is readily parameterized. In this case, for each realisation of these
 374 parameters of $f_{\mathbf{X}}$, a reliability problem is solved, for instance for linear limit-state functions using FORM
 375 as presented in [75], or in more general cases using simulation methods. Using simulation methods, even
 376 in the simplest case where the p-box describes a set of possible $f_{\mathbf{X}}$ by means of interval-valued statistical

377 moments, such calculation can be prohibitively demanding from a numerical standpoint. On the one
 378 hand, the calculation of the failure probability for a fixed value of the parameters associated with the
 379 stochastic process is quite costly. On the other hand, solving the associated optimization problems
 380 in this simple case is far from trivial, as it constitutes a double loop problem, where the inner loop
 381 comprises probability estimations, leading to possibly non-smooth behaviour of the objective function
 382 due to the inherent variance on the estimator of \mathcal{P} . Hence, apart from considering near-trivial simulation
 383 models, the propagation of p-box-valued parameters towards the bounds on the probabilistic measure
 384 \mathcal{P} is computationally intractable. Note that in some very specific cases, analytical solutions are also
 385 available [76].

386 4.2. Decoupling methods

387 The class of decoupling methods aims at decoupling the double loop, presented in Eqs. (17) and (18)
 388 by separating the propagation of aleatory and epistemic uncertainties. This class of methods includes
 389 techniques based on importance sampling and operator norm theory. Both methods are restricted to
 390 parametric p-boxes, more precisely, p-boxes that are constructed by defining some parameters $\boldsymbol{\theta}$ of the
 391 distribution $F_{\mathbf{X}}(\mathbf{x}|\boldsymbol{\theta})$ to be interval valued.

392 4.2.1. Importance sampling-based methods

393 The core idea of importance sampling based methods is to propagate a single, well-chosen realisation
 394 $\hat{f}_{\mathbf{X}}$ of a parameterized p-box (where $\hat{f}_{\mathbf{X}}$ is optimal with respect to a predefined measure), and reweigh
 395 the obtained samples of \mathbf{y} to infer bounds on \mathcal{P} .

396 A first such method is Extended Monte Carlo simulation, as introduced by [39], which is applicable to
 397 the propagation of parameterized p-boxes subjected to epistemic uncertainty in their first two moments, as
 398 well as the probability of failure. As a first step, the parameters $\boldsymbol{\theta}$ of the p-box, which account for μ_x and
 399 σ_x in the quintuple description, are represented by a subjective probability model $f_{\boldsymbol{\Theta}}(\boldsymbol{\theta}) = \prod_{i=1}^{n_{\boldsymbol{\theta}}} f_{\Theta_i}(\theta_i)$.
 400 Then, a local estimation for \mathcal{P} , being \hat{p}_f , is derived as:

$$\hat{\mathcal{P}}(\boldsymbol{\theta}) = \frac{1}{N} \sum_{k=1}^N \mathcal{H}(\mathbf{x}_k) \frac{f_{\mathbf{X}}(\mathbf{x}_k | \boldsymbol{\theta})}{f_{\mathbf{X}}(\mathbf{x}_k | \boldsymbol{\theta}^*)} \quad (23)$$

401 which is an unbiased estimator, but highly affected by the selection of $\boldsymbol{\theta}^*$. ‘Local’ in this context denotes
 402 that the estimator is derived for a fixed value of $\boldsymbol{\theta}$ inside its support $\boldsymbol{\theta}^I$. This fixed value, $\boldsymbol{\theta}^*$, should
 403 be selected such that it minimizes the variance on the estimator $\hat{\mathcal{P}}(\boldsymbol{\theta})$ [77], similarly to conventional
 404 Importance Sampling, as:

$$\boldsymbol{\theta}^* = \operatorname{argmin} \int_{D_{\boldsymbol{\theta}}} T(\boldsymbol{\theta}, \boldsymbol{\theta}^*) f_{\boldsymbol{\Theta}}(\boldsymbol{\theta}) \, d\boldsymbol{\theta} \quad (24)$$

405 with $T(\boldsymbol{\theta}, \boldsymbol{\theta}^*) = V[\mathcal{H}(\mathbf{X})f_{\mathbf{X}}(\mathbf{X} | \boldsymbol{\theta})/f_{\mathbf{X}}(\mathbf{X} | \boldsymbol{\theta}^*)]$ and V is the variance operator with respect to $f_{\mathbf{X}}(\cdot |$
 406 $\boldsymbol{\theta}^*)$. The global version of this approach is based on realizations $(\mathbf{x}_k, \boldsymbol{\theta}_k)$, $k = 1, \dots, N$ of a joint sample
 407 distributed according to a joint PDF $f_{\mathbf{X}, \boldsymbol{\Theta}}$. The estimator $\hat{\mathcal{P}}(\boldsymbol{\theta})$ is in this case expressed as:

$$\hat{\mathcal{P}}(\boldsymbol{\theta}) = \frac{1}{N} \sum_{k=1}^N \mathcal{H}(\mathbf{x}_k) \frac{f_{\mathbf{X}}(\mathbf{x}_k | \boldsymbol{\theta})}{f_{\mathbf{X}}(\mathbf{x}_k | \boldsymbol{\theta}_k)} \quad (25)$$

408 where \mathbf{x}_k and $\boldsymbol{\theta}_k$ are generated by applying the correct inverse probabilistic transform to the corresponding
 409 variables of a multivariate standard uniform distribution. The global estimator gives a better estimation
 410 of \mathcal{P} over the entire support of $\boldsymbol{\theta}$, at the cost of lower accuracy around $\boldsymbol{\theta}^*$ and a higher computational
 411 cost, since in this case, also convergence in terms of the effect of $\boldsymbol{\theta}$ has to be ensured.

412 An alternative optimal sampling density to propagate parameterized p-boxes following a reweighted
 413 sampling scheme was proposed by [78, 79]. Following the approach of [78, 79], the optimal density
 414 should be obtained by minimizing the total expected squared Hellinger distance between $f_{\mathbf{X}}(\cdot | \boldsymbol{\theta})$ and
 415 the optimal sampling density $f_{\mathbf{X}}(\cdot | \boldsymbol{\theta}^*)$ under an isoperimetric constraint that ensures that the derived
 416 optimal sampling density is a valid density function. The main difference with optimal sampling density
 417 presented in Eq. (24) is that this approach is not aimed at minimizing the variance, but rather that the
 418 sampling density is as close as possible to the target density.

419 4.2.2. Advanced Line Sampling

420 As an alternative decoupling strategy to deal with p-box valued uncertainty, Advanced Line Sampling
 421 was recently introduced [80]. Opposed to ‘conventional’ line sampling [81], this approach adaptively
 422 looks for the so-called important direction in standard normal space. Furthermore, due to this adaptive
 423 refinement, the same important direction can be used for the entire p-box analysis. Additionally, the
 424 method allows for reusing samples that are generated within the inner loop to be re-used during other
 425 iterations of the outer loop, significantly increasing the computational efficiency [80]. Based on these
 426 properties, a gain in computational efficiency of a factor of 4 over regular line-sampling approaches can
 427 be obtained, as reported in [80].

428 4.2.3. Operator norm theory

429 Operator norm theory provides an alternative pathway to decouple the double loop in Eq. (17)
 430 and (18), as presented first in [82] for the case of the class of linear models \mathcal{M} . In case an affine
 431 formulation of the imprecise random variables in terms of their parameters is possible, the propagation of
 432 the imprecise stochastic load can be performed in a two-step procedure. First, the values of the epistemic
 433 parameters that yield an extremum for \mathcal{P} are determined by maximizing/minimizing the operator norm.

434 Specifically, the operator norm is computed over the product of the linear mapping provided by the
 435 numerical model \mathcal{M} with a basis \mathbf{B} that represents the auto-correlation of the load on the model:

$$\boldsymbol{\theta}^* = \underset{\boldsymbol{\theta} \in \boldsymbol{\theta}^I}{\operatorname{argmin}} \|\mathbf{A}(\boldsymbol{\theta})\|_{p^{(1)}, p^{(2)}} \quad (26)$$

436

$$\boldsymbol{\theta}^{\bar{*}} = \underset{\boldsymbol{\theta} \in \boldsymbol{\theta}^I}{\operatorname{argmax}} \|\mathbf{A}(\boldsymbol{\theta})\|_{p^{(1)}, p^{(2)}} \quad (27)$$

437 with $\mathbf{A} = \mathcal{M}\mathbf{B}$, where \mathbf{B} can for instance be determined following the well-known Karhunen-Loève
 438 expansion [82]. The operator norm $\|\mathbf{A}\|_{p^{(1)}, p^{(2)}}$ is generally defined as [83]:

$$\|\mathbf{A}\|_{p^{(1)}, p^{(2)}} = \inf \left\{ c \geq 0 : \|\mathbf{A}\mathbf{v}\|_{p^{(1)}} \leq c \cdot \|\mathbf{v}\|_{p^{(2)}} \quad \forall \mathbf{v} \in \mathbb{R}^{n_{KL}} \right\}, \quad (28)$$

439 and gives a measure for how much \mathbf{A} lengthens vector \mathbf{v} in the maximum case. The practical calculation of
 440 the operator norm is case dependent. For instance, when considering first excursion problems [84, 85, 86],
 441 i.e., $\mathcal{P} \equiv p_f$, the selection of $p^{(1)} \rightarrow \infty$ and $p^{(2)} = 2$ has been found to be a good choice [87]. In this case, the
 442 operator norm corresponds to the maximum \mathcal{L}_2 norm of a row of \mathbf{A} [83]. Then, two failure probabilities,
 443 corresponding to $p_f(\boldsymbol{\theta}^*)$ and $p_f(\boldsymbol{\theta}^{\bar{*}})$ have to be computed to determine the bounds on \mathcal{P} . As such, the
 444 double loop is effectively replaced by two deterministic optimizations and two crisp reliability estimations.
 445 Gains in computational efficiency with several orders of magnitude have been reported [82, 87]. The main
 446 drawback of the method is the limited scope, since the approach is only applicable to uncertain linear
 447 models with epistemic uncertain structural parameters, subjected to imprecisely defined load conditions.

448 4.3. Surrogate modelling for p-boxes

449 Surrogate models approximate well-selected ‘regions’ of \mathcal{M} by a computationally more efficient sur-
 450rogate model $\hat{\mathcal{M}}(\cdot | \mathbf{a})$. For instance, in the specific case of reliability analysis, $\hat{\mathcal{M}}(\cdot | \mathbf{a})$ is designed
 451 to be highly accurate in the region around the limit state function (i.e., $\mathcal{M}(\mathbf{x}) = 0$). This surrogate
 452 $\hat{\mathcal{M}}$, which is parameterized by a vector $\mathbf{a} \in \mathbb{R}^{n_a}$, is usually *trained* by means of a set of training data
 453 $\{(\mathbf{x}_i, \mathbf{y}_i) \mid i = 1, \dots, N\}$ via a supervised learning approach as to minimize the discrepancy between
 454 $\hat{\mathbf{y}}_i = \hat{\mathcal{M}}(\mathbf{x}_i | \mathbf{a})$ and \mathbf{y}_i , according to a predefined measure (e.g., in an L_2 sense). These training data
 455 are generated either *a priori* (e.g., in case of sensitivity analysis) or enriched following active learning
 456 approaches [88, 89], which is most commonly applied in the field of reliability analysis. Examples of
 457 such maps to represent $\hat{\mathcal{M}}$ that have been used in the context of propagating p-boxes include Gaus-
 458 sian process models [90] (also known as Kriging), polynomial response surface models [91] or techniques
 459 based on Taylor series expansions [92]. Also adaptive schemes based on Kriging have been introduced
 460 in literature [57] that are applicable to both parametric and distribution-free p-boxes. In this section,

461 three classes of methods are explained in detail that are highly promising from an engineering point of
 462 view due to their ‘black-box’ nature (i.e., they require no interaction with the inner operations of \mathcal{M}),
 463 theoretical implications and numerical efficiency. Note that in essence, each type of surrogate model can
 464 be used in combination with a double-loop approach since they are very cheap to evaluate. The selection
 465 of the appropriate type of surrogate model in fact only depends on \mathcal{M} .

466 4.3.1. Polynomial Chaos Expansions & Kriging models

467 Polynomial chaos expansion (PCE) and Kriging are two widely used surrogate modelling techniques
 468 that approximate \mathcal{M} via intricate regression schemes. In general, PCE and Kriging have different fields
 469 of application in the propagation of uncertainties. On the one hand, if the analyst is interested in
 470 propagating uncertainty in general (e.g., when $\mathcal{H}(\mathbf{x}) = (\mathbf{y} - \boldsymbol{\mu}_Y)^n$) PCE generally is better suited.
 471 Conversely, when considering reliability analysis, Kriging approaches are generally more performing since
 472 they allow for performing active learning [89, 93, 94], even though active learning approaches for PCE
 473 have also been introduced [95].

474 A sparse PCE surrogate model is given by:

$$\hat{\mathcal{M}}(\mathbf{x} | \mathbf{a}) = \sum_{\alpha \in \mathcal{A}} a_\alpha \phi_\alpha(\mathbf{x}), \quad (29)$$

475 where ϕ_α are multivariate orthonormal polynomials and $\mathcal{A} \subset \mathbb{N}^{n_x}$ is a finite set of multi-indices that
 476 is obtained by sparse decomposition. In [96], distribution-free p-boxes are propagated in a two-level
 477 approach in which first \mathcal{M} , and second $\underline{\mathcal{M}}$ and $\overline{\mathcal{M}}$ (in the sense of Eq (21) and (22)) are substituted
 478 using sparse PCE. The training set is generated for an auxiliary input vector X and least angle regression
 479 (LARS) is used for training. In case of parametric p-boxes, it is proposed in [97] to model the sparse
 480 PCE coefficients a_α as quadratic polynomial functions of the parameters $\boldsymbol{\theta}$ of the p-box and using a
 481 double-loop sampling for the propagation.

482 Whereas PCE methods focus on the global behaviour of \mathcal{M} and are therefore suitable for a general
 483 propagation of p-boxes, Kriging methods focus on a local behaviour of \mathcal{M} and are therefore often preferred
 484 for reliability analysis. Indeed, in this context, a high accuracy in the vicinity where $\{\mathcal{M} = 0\}$ is especially
 485 crucial. Using Kriging, a surrogate $\hat{\mathcal{M}}$ for the limit-state function is considered to be a realization of a
 486 Gaussian process. It is:

$$\hat{\mathcal{M}}(\mathbf{x} | \mathbf{a}) = \boldsymbol{\beta}_\mathbf{a}^\top \boldsymbol{\psi}(\mathbf{x}) + Z_\mathbf{a}(\mathbf{x}, \omega), \quad (30)$$

487 where the first term, consisting of coefficients $\boldsymbol{\beta}_\mathbf{a}$ and regression functions $\boldsymbol{\psi}$, is the mean value of the
 488 process, and the second term is a zero-mean, stationary Gaussian process, characterized by a variance and
 489 an auto-correlation function depending on \mathbf{a} . Similar to above, a two-level approach in which first \mathcal{M} ,

490 and second $\underline{\mathcal{M}}$ and $\overline{\mathcal{M}}$ are substituted is considered for distribution-free p-boxes in [57]. Here, adaptive
 491 Kriging Monte Carlo simulation (AK-MCS) is used for an accurate estimation of the failure probabilities
 492 and random slicing is used to obtain $\underline{\mathcal{P}}$ and $\overline{\mathcal{P}}$, see Eq. (19) and (20). Also in [57], a failure probability
 493 $\mathcal{P}(\boldsymbol{\theta})$ which depends on the parameters $\boldsymbol{\theta}$ is estimated via AK-MCS and efficient global optimization
 494 (EGO) for parametric p-boxes. A similar, but more detailed, Kriging-based procedure for parametric
 495 p-boxes is also described in [98].

496 4.3.2. High-dimensional model representation based methods

497 The Extended Monte Carlo framework, as introduced in Section 4.2.1 allows for propagating parametrized
 498 p-boxes by a single probabilistic simulation and a reweighting step. Nonetheless, still a considerable num-
 499 ber of evaluations of \mathcal{M} are required, which might impede practical applications. Therefore, in [39], both
 500 the local and global Extended Monte Carlo methods were integrated with a high-dimensional model
 501 representation (HDMR) decomposition of \mathcal{M} as a surrogate modelling strategy. Following a HDMR
 502 decomposition, \mathcal{P} can be represented as:

$$\begin{aligned}
 \mathcal{P}(\boldsymbol{\theta}) = & p_{f,0} + \sum_{i=1}^{n_{\theta}} p_{f,i}(\theta_i) + \sum_{1 \leq i < j \leq d} p_{f,ij}([\theta_i, \theta_j]) + \dots \\
 & + p_{f,12\dots n_{\theta}}(\boldsymbol{\theta}).
 \end{aligned}
 \tag{31}$$

503 Note that HDMR decompositions are more widely applicable than to represent \mathcal{P} . In the context
 504 of propagating p-boxes, in [39], it is proposed to apply a cut-HDMR strategy in combination with
 505 the local Extended Monte Carlo Method, allowing for a rigorous estimation of the variances of the
 506 estimators, as well as an estimation of the sensitivity of the parameters in $\boldsymbol{\theta}$. Similarly, it is proposed
 507 to perform a Random Slicing HDMR decomposition in combination with the Global Method. For the
 508 details concerning the implementation of these techniques, as well as the corresponding proofs, the reader
 509 is referred to [39]. These methods were recently also extended to be applied in combination with Line
 510 Sampling in [99].

511 An alternative application of the Sobol-Hoeffding decomposition in the context of propagating im-
 512 precise probabilities through numerical models is given by [100]. In [100], the authors apply a fuzzy
 513 probabilistic approach in the study of designing cylindrical shells under geometric imperfections, which
 514 are modelled as a random field. Specifically, imprecision in the auto-correlation structure of the random
 515 field is accounted for by means of fuzzy arithmetic, and the S-H decomposition is applied to speed up
 516 the corresponding α -level optimization.

517 *4.3.3. Interval predictor models*

518 An interval predictor model (IPM), as introduced in [101], is a type of surrogate model that approx-
 519 imates \mathcal{M} by means of an interval-valued map $\hat{\mathcal{M}}_I(\cdot, \boldsymbol{\theta}) : \mathbb{R}^{n_x} \rightarrow \mathbb{IR}$, where \mathbb{IR} is the set of all intervals
 520 in \mathbb{R} . This map can be constructed with a minimal number of assumptions on the mapping provided by
 521 \mathcal{M} . Specifically, $\hat{\mathcal{M}}_I(\mathbf{x}, \boldsymbol{\theta})$ given by:

$$\hat{\mathcal{M}}_I(\mathbf{x}, \boldsymbol{\theta}) = \{y = \boldsymbol{\theta}^T \boldsymbol{\phi}(\mathbf{x}) \mid \boldsymbol{\theta} \in \boldsymbol{\theta}^I\} \quad (32)$$

522 with $\boldsymbol{\phi}$ a basis (e.g., polynomial or trigonometric), $\boldsymbol{\theta}$ the fitting parameters of the IPM and $\boldsymbol{\theta}^I = [\underline{\boldsymbol{\theta}}, \bar{\boldsymbol{\theta}}]$ an
 523 $n_{\boldsymbol{\theta}}$ -dimensional hyper-rectangular set. An optimal IPM is constructed by minimizing $E [|(\bar{\boldsymbol{\theta}} - \boldsymbol{\theta})| \boldsymbol{\phi}(\mathbf{x}) |]$.
 524 Scenario Optimization [54] can be used to judge the generalization properties of the IPM. In case the
 525 corresponding optimization problem is convex, the reliability R of the IPM (i.e., the probability that a
 526 future unobserved data point will be contained in the IPM) is bounded by:

$$P(R \geq 1 - \epsilon) > 1 - \beta, \quad (33)$$

527 where ϵ and β are the confidence and reliability parameters, which for our hyper-rectangular model can
 528 be obtained from

$$\beta \geq \binom{k + n_{\boldsymbol{\theta}} - 1}{k} \sum_{i=0}^{k+n_{\boldsymbol{\theta}}-1} \binom{N}{i} \epsilon^i (1 - \epsilon)^{N-i}, \quad (34)$$

529 where k is the number of data points discarded by some algorithm and ϵ can be chosen as a very small
 530 number (e.g., $\epsilon = 1 \cdot 10^{-06}$). An approach to apply IPMs in the context of propagating parametrized
 531 p-boxes is introduced by [102]. They show that IPMs can be used as surrogate model to speed up the
 532 calculation of Eq.(17) and Eq.(18), including a strategy to intelligently construct the set $\{(\mathbf{x}_i, \mathbf{y}_i) \mid i =$
 533 $1, \dots, N\}$. Furthermore, they show that the IPM can also be used as a surrogate model for g , which in
 534 its turn can be used in combination with importance sampling to determine $[\underline{\mathcal{P}}, \bar{\mathcal{P}}]$. Other applications
 535 include estimating the bounds on \mathcal{P} resulting from the surrogate model inaccuracy in a deterministic
 536 case [103].

537 The main advantages of these techniques are that (1) they are completely black-box as they don't
 538 require any assumption on \mathcal{M} and (2) that under the mild assumption of convexity of the training
 539 guaranteed reliability bounds on the accuracy are obtained based on the rigorous framework of Scenario
 540 Optimization, which was recently extended to non-convex optimization problems too [54]. Unfortunately,
 541 active learning of this type of surrogate models is not feasible, since this violates the required assumptions
 542 on independence between the training samples [103].

543 4.4. Concluding discussion

544 As an attempt to create some clarity in the applicability of the multitude of available methods for
 545 the propagation of p-boxes, Table 2 summarizes the discussed methods, including their class, limitations
 546 and to which type of p-box they are applicable. Note that no precise statements on accuracy and/or
 547 numerical efficiency are given, as these depend fully on the problem under consideration. For instance, for
 548 linear models, the operator norm will undoubtedly give the best results from all 'direct' solution methods,
 549 as it reduces the solution of the problem to two deterministic optimization problems and two reliability
 550 analyses. On the other hand, for highly nonlinear problems, this method will fail, and potentially methods
 551 based on surrogate modelling will outperform the other methods. To make a fully fair comparison between
 552 these methods in this respect, a dedicated benchmark study is required, which falls outside the scope of
 553 this paper. It should be noted, however, that in case there is no prerogative to use the numerical model,
 554 the computational efficiency of propagating imprecise probabilities with surrogate modelling approaches
 555 is orders of magnitude higher as compared to the approaches that directly use the numerical model.
 556 This is particularly true when advanced active learning methods such as AK-MCS [89] are applied in the
 557 context of reliability analysis.

Table 2: Summary of black-box propagation schemes for p-boxes

Method	class	Type p-box	Limitation	ref
Double loop	Direct	Both	Computational cost	
Interval Monte Carlo	Direct	Free	Computational cost	[62]
Random set methods	Direct	Both ¹	Computational cost	[74]
Advanced Line Sampling	Decoupling	Param.	Moderate linearity	[80]
Extended Monte Carlo	Decoupling	Param.	Stochastic hyper-parameters	[39]
Operator norm	Decoupling	Param.	Linear models	[82]
PCE	Surrogate	Both	Global approximation of \mathcal{M}	[57]
Kriging	Surrogate	Both	Local approximation of \mathcal{M}	[104]
HDMR	Surrogate	Param.	Dimension of \mathbf{x}	[100]
IPM	Surrogate	Param.	No adaptive refinement	[102]

558 Generally, optimization approaches such as double loop or sampling methods provide inner approx-
 559 imations of the bounds on P_f as they generate realisations within $[\underline{F}_X(x), \overline{F}_X(x)]$ and try to approach
 560 $\underline{\mathcal{P}}$, respectively $\overline{\mathcal{P}}$ from the inside-out [43]. Note that, in case distribution-free p-box methods such
 561 as those based on random sets are applied to parametric p-boxes, this effectively constitutes an outer
 562 approximation.

¹More general imprecise probability models can be considered too, please refer to Section 2.3 for more information

563 **5. Conclusions**

564 The development of highly efficient approaches to perform engineering computations with imprecise
565 probabilities, represented as p-boxes, is a quickly expanding field of research. The main challenge in
566 this context is to overcome the required double loop propagation framework to estimate the bounds
567 on probabilistic measures of the structure under consideration (such as, e.g., the probability of failure).
568 Apart from near-trivial numerical simulation models, such double loop calculations are computationally
569 intractable without resorting to high-performance computing facilities.

570 This problem is currently being tackled from two sides: (1) by improving the propagation efficiency of
571 p-boxes aimed at breaking the double loop and (2) developing efficient surrogate models for the numerical
572 models to be used in the double loop. Concerning the former set of solutions, highly efficient propagation
573 schemes have been introduced in recent years. However, these methods are either limited in terms of
574 the admissible descriptions of the uncertainty, or the non-linearity of the underlying numerical model.
575 Future developments in these areas should concentrate on expanding the scope of applicability of these
576 techniques. Concerning the latter, surrogate models usually only require some smoothness constraints
577 on the underlying numerical model, which allows for a greater flexibility. Nonetheless, the accuracy of
578 the calculation of the bounds on the probabilistic measures is limited to the accuracy of the underlying
579 surrogate model. Furthermore, also the training of these surrogate models can entail a non-negligible
580 numerical cost, which is commonly mitigated by resorting to active learning.

581 As such, to conclude, the last 15 years brought many highly performing approaches to compute with
582 imprecise probabilities in general, and p-boxes in specific. The main challenge at this point appears
583 to translate this set of highly performing methods to industrial applications involving multi-physical
584 and/or million degree-of-freedom numerical models. Further work in this domain will include continuing
585 developments on a theoretical side (e.g., constrained distribution-free p-boxes) and propagation aspects
586 (e.g., operator norm theory for nonlinear dynamics). We expect that the current rapid developments
587 in the domain of machine learning and big data can play a pivotal role in (1) the characterization of
588 uncertainties, where the uncertainty characteristics are added by the machine learning algorithm, (2)
589 the propagation and inverse identification of p-boxes, much alike active learning surrogate models, (3)
590 performing dimension reduction by finding optimal representations of the uncertainty and (4) detecting
591 dependencies in very high-dimensional datasets.

592 **Acknowledgements**

593 This paper presents an extended and revised version of the conference proceedings in [105]. Matthias
594 Faes acknowledges the support of the Research Foundation Flanders (FWO) under grant number 12P3519N

595 as well as the Alexander von Humboldt foundation. Marco Daub acknowledges the support of the German
596 Academic Exchange Service (DAAD) with a postdoc fellowship.

597 **References**

- 598 [1] G. Schuëller, *Computational Methods in Stochastic Dynamics*, Springer Netherlands, 2011, pp.
599 1–24.
- 600 [2] M. Faes, D. Moens, *Recent Trends in the Modeling and Quantification of Non-probabilistic Uncer-*
601 *tainty*, *Arch. Comput. Methods Eng.* (2019).
- 602 [3] M. Beer, Y. Zhang, S. T. Quek, K. K. Phoon, *Reliability analysis with scarce information: Com-*
603 *paring alternative approaches in a geotechnical engineering context*, *Struct. Saf.* 41 (2013) 1–10.
- 604 [4] M. Broggi, M. Faes, E. Patelli, Y. Govers, D. Moens, M. Beer, *Comparison of Bayesian and interval*
605 *uncertainty quantification: Application to the AIRMOD test structure*, in: *2017 IEEE Symposium*
606 *Series on Computational Intelligence, SSCI 2017 - Proceedings*, volume 2018-Janua, 2018, pp. 1–8.
- 607 [5] M. Faes, M. Broggi, E. Patelli, Y. Govers, J. Mottershead, M. Beer, D. Moens, *A multivariate*
608 *interval approach for inverse uncertainty quantification with limited experimental data*, *Mech. Syst.*
609 *Sig. Process.* 118 (2019) 534–548.
- 610 [6] G. Schuëller, H. Pradlwarter, *Benchmark study on reliability estimation in higher dimensions of*
611 *structural systems – An overview*, *Struct. Saf.* 29 (2007) 167–182.
- 612 [7] K. Marti, *Approximation and derivatives of probabilities of survival in structural analysis and*
613 *design*, *Structural Optimization* 13 (1997) 230–243.
- 614 [8] A. A. Taflanidis, J. Beck, *Analytical approximation for stationary reliability of certain and uncertain*
615 *linear dynamic systems with higher-dimensional output*, *Earthquake Engineering & Structural*
616 *Dynamics* 35 (2006) 1247–1267.
- 617 [9] K. W. Breitung, *Asymptotic Approximations for Probability Integrals*, Springer, Berlin, 1994.
- 618 [10] S. Au, J. Beck, *Estimation of small failure probabilities in high dimensions by subset simulation*,
619 *Probab. Eng. Mech.* 16 (2001) 263–277.
- 620 [11] M. A. Misraji, M. A. Valdebenito, H. A. Jensen, C. F. Mayorga, *Application of directional impor-*
621 *tance sampling for estimation of first excursion probabilities of linear structural systems subject to*
622 *stochastic Gaussian loading*, *Mech. Syst. Sig. Process.* 139 (2020) 106621.

623 [12] J. Li, J.-B. Chen, The probability density evolution method for dynamic response analysis of
624 non-linear stochastic structures, *Int. J. Numer. Methods Eng.* 65 (2006) 882–903.

625 [13] M. Beer, S. Ferson, V. Kreinovich, Imprecise probabilities in engineering analyses, *Mech. Syst. Sig.*
626 *Process.* 37 (2013) 4–29.

627 [14] W. L. Oberkampf, J. C. Helton, C. A. Joslyn, S. F. Wojtkiewicz, S. Ferson, Challenge problems:
628 Uncertainty in system response given uncertain parameters, *Reliability Engineering and System*
629 *Safety* 85 (2004) 11–19. doi:10.1016/j.ress.2004.03.002.

630 [15] M. H. Faber, On the Treatment of Uncertainties and Probabilities in Engineering Decision Analysis,
631 *Journal of Offshore Mechanics and Arctic Engineering* 127 (2005) 243.

632 [16] A. D. Kiureghian, O. Ditlevsen, Aleatory or epistemic? Does it matter?, *Structural Safety* 31
633 (2009) 105–112.

634 [17] D. Veneziano, A. Agarwal, E. Karaca, Decision making with epistemic uncertainty under safety
635 constraints: An application to seismic design, *Probabilistic Engineering Mechanics* 24 (2009) 426–
636 437.

637 [18] S. Bi, M. Broggi, M. Beer, The role of the Bhattacharyya distance in stochastic model updating,
638 *Mech. Syst. Sig. Process.* 117 (2019) 437 – 452.

639 [19] F. Tonon, A. Bernardini, A random set approach to the optimization of uncertain structures,
640 *Computers & structures* 68 (1998) 583–600.

641 [20] F. Tonon, Using random set theory to propagate epistemic uncertainty through a mechanical
642 system, *Reliability Engineering and System Safety* 85 (2004) 169–181.

643 [21] D. Alvarez, J. Hurtado, J. Ramírez, Tighter bounds on the probability of failure than those provided
644 by random set theory, *Computers & Structures* 189 (2017) 101–113.

645 [22] T. Fetz, M. Oberguggenberger, Propagation of uncertainty through multivariate functions in the
646 framework of sets of probability measures, *Reliability Engineering and System Safety* 85 (2004)
647 73–87. doi:10.1016/j.ress.2004.03.004.

648 [23] D. Dubois, H. Prade, *Possibility Theory*, volume 64, Springer US, Boston, MA, 1988.
649 doi:10.1007/978-1-4684-5287-7.

650 [24] G. Shafer, A Mathematical Theory of Evidence turns 40, *International Journal of Approximate*
651 *Reasoning* 79 (2016) 7–25.

- 652 [25] J. C. Helton, J. D. Johnson, W. L. Oberkampf, An exploration of alternative approaches to the
653 representation of uncertainty in model predictions, *Reliability Engineering and System Safety* 85
654 (2004) 39–71.
- 655 [26] W. L. McGill, B. M. Ayyub, Estimating parameter distributions in structural reliability assessment
656 using the transferable belief model, *Comput. Struct.* 86 (2008) 1052–1060.
- 657 [27] T. Augustin, F. Coolen, G. De Cooman, M. Troffaes, *Introduction to Imprecise Probabilities*, John
658 Wiley & Sons Ltd, Chichester, 2014.
- 659 [28] V. Kreinovich, S. Ferson, A new Cauchy-based black-box technique for uncertainty in risk analysis,
660 *Rel. Eng. Syst. Saf.* 85 (2004) 267–279.
- 661 [29] B. Möller, M. Beer, *Fuzzy Randomness*, Springer, Berlin, 2004. URL:
662 <http://link.springer.com/10.1007/978-3-662-07358-2>. doi:10.1007/978-3-662-07358-2.
- 663 [30] M. Beer, M. Zhang, S. Quek, S. Ferson, Structural reliability assessment with fuzzy probabilities,
664 in: [30], 2011.
- 665 [31] A. Decadt, G. de Cooman, J. De Bock, Monte Carlo Estimation for Imprecise Probabilities: Basic
666 Properties (2019). URL: <http://arxiv.org/abs/1905.09301>. arXiv:1905.09301.
- 667 [32] M. Troffaes, Imprecise monte carlo simulation and iterative importance sampling for the estimation
668 of lower previsions, *Int. J. Approximate Reasoning* 101 (2018) 31 – 48.
- 669 [33] J. W. Hall, Uncertainty-based sensitivity indices for imprecise probability distributions, *Reliability
670 Engineering & System Safety* 91 (2006) 1443–1451.
- 671 [34] S. Ferson, V. Kreinovich, L. Ginzburg, D. S. Myers, K. Sentz, *Constructing Probability Boxes
672 and Dempster-Shafer Structures*, Technical Report January, Technical report, Sandia National
673 Laboratories, 2003.
- 674 [35] W. L. Oberkampf, W. T. Tucker, J. Zhang, L. Ginzburg, D. J. Berleant, S. Ferson, J. Haja-
675 gos, R. B. Nelsen, Dependence in probabilistic modeling, Dempster-Shafer theory, and prob-
676 ability bounds analysis., Technical Report, Sandia National Laboratories (SNL), Albuquerque,
677 NM, and Livermore, CA, 2004. URL: <http://www.osti.gov/servlets/purl/919189-POVF66/>.
678 doi:10.2172/919189.
- 679 [36] I. Montes, E. Miranda, Bivariate p-boxes and maxitive functions, *Inter-
680 national Journal of General Systems* 46 (2017) 354–385. URL:

- 681 <https://www.tandfonline.com/doi/full/10.1080/03081079.2017.1305960>.
682 [doi:10.1080/03081079.2017.1305960](https://doi.org/10.1080/03081079.2017.1305960).
- 683 [37] M. Dannert, A. Fau, R. Fleury, M. Broggi, U. Nackenhorst, M. Beer, A probability-box approach on
684 uncertain correlation lengths by stochastic finite element method, PAMM (Proceedings in Applied
685 Mathematics and Mechanics) 18 (2018) e201800114.
- 686 [38] M. Faes, D. Moens, Imprecise random field analysis with parametrized kernel functions, Mech.
687 Syst. Sig. Process. 134 (2019) 106334.
- 688 [39] P. Wei, J. Song, S. Bi, M. Broggi, M. Beer, Z. Lu, Z. Yue, Non-intrusive stochastic analysis with
689 parameterized imprecise probability models: I. performance estimation, Mech. Syst. Sig. Process.
690 124 (2019) 349 – 368.
- 691 [40] P. Wei, J. Song, S. Bi, M. Broggi, M. Beer, Z. Lu, Z. Yue, Non-intrusive stochastic analysis with
692 parameterized imprecise probability models: II. reliability and rare events analysis, Mech. Syst.
693 Sig. Process. 126 (2019) 227 – 247.
- 694 [41] M. G. R. Faes, M. A. Valdebenito, X. Yuan, P. Wei, M. Beer, Augmented Reliability Analysis
695 for Estimating Imprecise First Excursion Probabilities in Stochastic Linear Dynamics, preprint
696 submitted to elsevier (2020).
- 697 [42] D. A. Alvarez, On the calculation of the bounds of probability of events using infinite random sets,
698 International Journal of Approximate Reasoning 43 (2006) 241–267. [doi:10.1016/j.ijar.2006.04.005](https://doi.org/10.1016/j.ijar.2006.04.005).
- 699 [43] E. Patelli, D. A. Alvarez, M. Broggi, M. de Angelis, Uncertainty Management in Multidisciplinary
700 Design of Critical Safety Systems, Journal of Aerospace Information Systems 12 (2014) 140–169.
- 701 [44] D. A. Alvarez, J. E. Hurtado, J. Ramírez, Tighter bounds on the probability of failure than those
702 provided by random set theory, Computers and Structures 189 (2017) 101–113.
- 703 [45] B. Möller, M. Beer, Fuzzy Randomness, Springer Berlin Heidelberg, Berlin, Heidelberg, 2004. URL:
704 <http://link.springer.com/10.1007/978-3-662-07358-2>. [doi:10.1007/978-3-662-07358-2](https://doi.org/10.1007/978-3-662-07358-2).
- 705 [46] V. J. Montgomery, F. P. A. Coolen, A. D. M. Hart, Bayesian Probability Boxes
706 in Risk Assessment, Journal of Statistical Theory and Practice 3 (2009) 69–
707 83. URL: [http://www.tandfonline.com/doi/abs/10.1080/15598608.2009.10411912](https://www.tandfonline.com/doi/abs/10.1080/15598608.2009.10411912).
708 [doi:10.1080/15598608.2009.10411912](https://doi.org/10.1080/15598608.2009.10411912).

- 709 [47] R. Schöbi, Surrogate models for uncertainty quantification in the context of imprecise probability
710 modelling, Doctoral thesis, ETH Zürich, Switzerland, 2017. doi:[https://doi.org/10.3929/ethz-a-](https://doi.org/10.3929/ethz-a-010870825)
711 010870825.
- 712 [48] M. Oberguggenberger, W. Fellin, Reliability bounds through random sets: Non-
713 parametric methods and geotechnical applications, *Computers & Structures* 86 (2008)
714 1093–1101. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0045794907002192>.
715 doi:10.1016/j.compstruc.2007.05.040.
- 716 [49] M. Troffaes, T. Basu, A cantelli-type inequality for constructing non-parametric
717 p-boxes based on exchangeability, volume 103 of *Proceedings of Machine Learn-*
718 *ing Research*, PMLR, Thagaste, Ghent, Belgium, 2019, pp. 386–393. URL:
719 <http://proceedings.mlr.press/v103/troffaes19a.html>.
- 720 [50] M. Oberguggenberger, W. Fellin, Reliability bounds through random sets: Non-parametric
721 methods and geotechnical applications, *Computers and Structures* 86 (2008) 1093–1101.
722 doi:10.1016/j.compstruc.2007.05.040.
- 723 [51] J. G. Saw, M. C. K. Yang, T. C. Mo, Chebyshev Inequality with Esti-
724 mated Mean and Variance, *The American Statistician* 38 (1984) 130. URL:
725 <https://www.jstor.org/stable/2683249?origin=crossref>. doi:10.2307/2683249.
- 726 [52] L. G. Crespo, B. K. Colbert, S. P. Kenny, D. P. Giesy, On the quantification of aleatory and
727 epistemic uncertainty using Sliced-Normal distributions, *Systems & Control Letters* 134 (2019)
728 104560.
- 729 [53] M. Imholz, M. Faes, D. Vandepitte, D. Moens, Robust uncertainty quantification in structural
730 dynamics under scarce experimental modal data: A bayesian-interval approach, *J. Sound Vib.* 467
731 (2020) 114983.
- 732 [54] M. C. Campi, S. Garatti, F. A. Ramponi, A General Scenario Theory for Nonconvex Optimization
733 and Decision Making, *IEEE Trans. Autom. Control* 63 (2018) 4067–4078.
- 734 [55] A. Kolmogoroff, Confidence Limits for an Unknown Distribution Func-
735 tion, *The Annals of Mathematical Statistics* 12 (1941) 461–463. URL:
736 <http://projecteuclid.org/euclid.aoms/1177731684>. doi:10.1214/aoms/1177731684.
- 737 [56] J. O. Berger, *Statistical Decision Theory and Bayesian Analysis*, Springer Series in Statistics,
738 Springer New York, New York, NY, 1985. doi:10.1007/978-1-4757-4286-2.

- 739 [57] R. Schöbi, B. Sudret, Structural reliability analysis for p-boxes using multi-level meta-models,
740 Probab. Eng. Mech. 48 (2017) 27–38.
- 741 [58] T. Aldenberg, J. S. Jaworska, Uncertainty of the Hazardous Concentration and Fraction Af-
742 fected for Normal Species Sensitivity Distributions, Ecotoxicology and Environmental Safety
743 46 (2000) 1–18. URL: <https://linkinghub.elsevier.com/retrieve/pii/S0147651399918699>.
744 doi:10.1006/eesa.1999.1869.
- 745 [59] L. Held, D. Sabanés Bové, Likelihood and Bayesian Inference, Statistics for Bi-
746 ology and Health, Springer Berlin Heidelberg, Berlin, Heidelberg, 2020. URL:
747 <http://link.springer.com/10.1007/978-3-662-60792-3>. doi:10.1007/978-3-662-60792-3.
- 748 [60] X. Liu, Z. Kuang, L. Yin, L. Hu, Structural reliability analysis based on probability and probability
749 box hybrid model, Structural Safety 68 (2017) 73–84. doi:10.1016/j.strusafe.2017.06.002.
- 750 [61] C. Wang, H. Zhang, M. Beer, Computing tight bounds of structural reliability under imprecise
751 probabilistic information, Computers & Structures 208 (2018) 92 – 104.
- 752 [62] H. Zhang, R. L. Mullen, R. L. Muhanna, Interval Monte Carlo methods for structural reliability,
753 Struct. Saf. 32 (2010) 183–190.
- 754 [63] H. Zhang, H. Dai, M. Beer, W. Wang, Structural reliability analysis on the basis of small samples:
755 An interval quasi-Monte Carlo method, Mech. Syst. Sig. Process. 37 (2013) 137–151.
- 756 [64] Z. P. Qiu, I. Elishakoff, Anti-optimization of structures with large uncertain-but-non-random
757 parameters via interval analysis, Computer Methods in Applied Mechanics and Engineering 152
758 (1998) 361–372.
- 759 [65] M. Zettler, J. Garloff, Robustness analysis of polynomials with polynomial parameter dependency
760 using Bernstein expansion, IEEE Transactions on Automatic Control 43 (1998) 425–431.
- 761 [66] L. G. Crespo, S. P. Kenny, D. P. Giesy, Reliability analysis of polynomial systems subject to p-box
762 uncertainties, Mechanical Systems and Signal Processing 37 (2013) 121–136.
- 763 [67] A. C. Calder, M. M. Hoffman, D. E. Willcox, M. P. Katz, F. D. Swesty, S. Ferson, Quantification
764 of Incertitude in Black Box Simulation Codes, Journal of Physics: Conference Series 1031 (2018).
- 765 [68] M. De Angelis, S. Ferson, E. Patelli, V. Kreinovich, Black-box propagation of failure probabili-
766 ties under epistemic uncertainty, Proceedings of the 3rd International Conference on Uncertainty
767 Quantification in Computational Sciences and Engineering, UNCECOMP 2019 (2019) 713–723.

- 768 [69] M. Hanss, *Applied Fuzzy Arithmetic*, Springer Berlin Heidelberg, 2005.
- 769 [70] M. Neher, From Interval Analysis to Taylor Models - An Overview, *International Association for*
770 *Mathematics and Computers in Simulation* (2005) 102–110.
- 771 [71] J. A. Enszer, Y. Lin, S. Ferson, G. F. Corliss, M. A. Stadtherr, Probability bounds analysis for
772 nonlinear dynamic process models, *AIChE Journal* 57 (2011) 404–422.
- 773 [72] N.-C. Xiao, Y.-F. Li, L. Yu, Z. Wang, H.-Z. Huang, Saddlepoint approximation-based reliability
774 analysis method for structural systems with parameter uncertainties, *Proceedings of the Institution*
775 *of Mechanical Engineers, Part O: Journal of Risk and Reliability* 228 (2014) 529–540.
- 776 [73] D. A. Alvarez, A Monte Carlo-based method for the estimation of lower and upper probabilities of
777 events using infinite random sets of indexable type, *Fuzzy Sets and Systems* 160 (2009) 384–401.
- 778 [74] D. A. Alvarez, F. Uribe, J. E. Hurtado, Estimation of the lower and upper bounds on the probability
779 of failure using subset simulation and random set theory, *Mechanical Systems and Signal Processing*
780 100 (2018) 782–801.
- 781 [75] X. Du, Unified uncertainty analysis by the first order reliability method, *Journal of Mechanical*
782 *Design, Transactions of the ASME* 130 (2008) 0914011–09140110. doi:10.1115/1.2943295.
- 783 [76] J. Sadeghi, M. De Angelis, E. Patelli, Analytic Probabilistic Safety Analysis under Severe Un-
784 certainty, *ASCE-ASME Journal of Risk and Uncertainty in Engineering Systems, Part A: Civil*
785 *Engineering* 6 (2020). doi:10.1061/AJRUA6.0001028.
- 786 [77] P. Wei, Z. Lu, J. Song, Extended Monte Carlo simulation for parametric global sensitivity analysis
787 and optimization, *AIAA Journal* 52 (2014) 867–878.
- 788 [78] J. Zhang, M. D. Shields, On the quantification and efficient propagation of imprecise probabilities
789 resulting from small datasets, *Mech. Syst. Sig. Process.* 98 (2018) 465–483.
- 790 [79] J. Zhang, M. D. Shields, Efficient Monte Carlo resampling for probability measure changes from
791 Bayesian updating, *Probab. Eng. Mech.* 55 (2019) 54–66.
- 792 [80] M. de Angelis, E. Patelli, M. Beer, Advanced line sampling for efficient robust reliability analysis,
793 *Struct. Saf.* 52, Part B (2015) 170–182.
- 794 [81] P. Koutsourelakis, H. Pradlwarter, G. Schuëller, Reliability of structures in high dimensions, part
795 I: Algorithms and applications, *Probab. Eng. Mech.* 19 (2004) 409–417.

- 796 [82] M. Faes, M. A. Valdebenito, D. Moens, B. Michael, Bounding the First Excursion Probability of
797 Linear Structures Subjected to Imprecise Stochastic Loading, preprint submitted to elsevier (2020).
- 798 [83] J. A. Tropp, Topics in Sparse Approximation, Ph.D. thesis, The University of Texas at Austin,
799 2004.
- 800 [84] T. Soong, M. Grigoriu, Random Vibration of Mechanical and Structural Systems, Prentice Hall,
801 Englewood Cliffs, New Jersey, 1993.
- 802 [85] K. Marti, Differentiation of probability functions: The transformation method, Computers &
803 Mathematics with Applications 30 (1995) 361–382.
- 804 [86] Y. Zhang, A. Der Kiureghian, First-excursion probability of uncertain structures, Probab. Eng.
805 Mech. 9 (1994) 135–143.
- 806 [87] M. G. R. Faes, M. A. Valdebenito, Fully Decoupled Reliability-Based Design Optimization of
807 Structural Systems Subject to Uncertain Loads, Computer Methods in Applied Mechanics and
808 Engineering (2020).
- 809 [88] S. Marelli, B. Sudret, An active-learning algorithm that combines sparse polynomial chaos expan-
810 sions and bootstrap for structural reliability analysis, Struct. Saf. 75 (2018) 67 – 74.
- 811 [89] N. Lelièvre, P. Beaurepaire, C. Mattrand, N. Gayton, AK-MCSi: A Kriging-based method to deal
812 with small failure probabilities and time-consuming models, Struct. Saf. 73 (2018) 1 – 11.
- 813 [90] J. Zhang, M. Xiao, L. Gao, An active learning reliability method combining kriging constructed
814 with exploration and exploitation of failure region and subset simulation, Rel. Eng. Syst. Saf. 188
815 (2019) 90 – 102.
- 816 [91] A. Sofi, G. Muscolino, F. Giunta, Propagation of uncertain structural properties described by
817 imprecise Probability Density Functions via response surface method, Probab. Eng. Mech. (2020)
818 103020.
- 819 [92] W. Gao, D. Wu, C. Song, F. Tin-Loi, X. Li, Hybrid probabilistic interval analysis of bar structures
820 with uncertainty using a mixed perturbation monte-carlo method, Finite Elem. Anal. Des. 47
821 (2011) 643–652.
- 822 [93] P. Angelikopoulos, C. Papadimitriou, P. Koumoutsakos, X-TMCMC: Adaptive kriging for Bayesian
823 inverse modeling, Computer Methods in Applied Mechanics and Engineering 289 (2015) 409–428.
824 doi:10.1016/j.cma.2015.01.015.

- 825 [94] C. Ling, Z. Lu, X. Zhu, Efficient methods by active learning kriging coupled with variance reduction
826 based sampling methods for time-dependent failure probability, *Rel. Eng. Syst. Saf.* 188 (2019) 23
827 – 35.
- 828 [95] S. Marelli, B. Sudret, An active-learning algorithm that combines sparse polynomial chaos ex-
829 pansion and bootstrap for structural reliability analysis, *Structural Safety* 75 (2018) 67–74.
830 doi:<https://doi.org/10.1016/j.strusafe.2018.06.003>.
- 831 [96] R. Schöbi, B. Sudret, Uncertainty propagation of p-boxes using sparse polynomial chaos expansions,
832 *J. Comput. Phys.* 339 (2017) 307–327.
- 833 [97] H. B. Liu, C. Jiang, Z. Xiao, Efficient uncertainty propagation for parameterized p-box using
834 sparse-decomposition-based polynomial chaos expansion, *Mech. Syst. Sig. Process.* 138 (2020)
835 106589.
- 836 [98] N.-C. Xiao, K. Yuan, C. Zhou, Adaptive Kriging-based efficient reliability method for structural
837 systems with multiple failure modes and mixed variables, *Comput. Methods Appl. Mech. Eng.* 359
838 (2020) 112649.
- 839 [99] J. Song, M. Valdebenito, P. Wei, M. Beer, Z. Lu, Non-intrusive imprecise stochastic simulation by
840 line sampling, *Struct. Saf.* 84 (2020) 101936.
- 841 [100] M. Fina, P. Weber, W. Wagner, Polymorphic uncertainty modeling for the simulation of geometric
842 imperfections in probabilistic design of cylindrical shells, *Struct. Saf.* 82 (2020) 101894.
- 843 [101] L. G. Crespo, S. P. Kenny, D. P. Giesy, Interval Predictor Models With a Linear Parameter
844 Dependency, *Journal of Verification, Validation and Uncertainty Quantification* 1 (2016) 1–10.
- 845 [102] J. Sadeghi, M. de Angelis, E. Patelli, Robust propagation of probability boxes by interval predictor
846 models, *Struct. Saf.* 82 (2020) 101889.
- 847 [103] M. Faes, J. Sadeghi, M. Broggi, M. de Angelis, E. Patelli, M. Beer, D. Moens, On the Robust
848 Estimation of Small Failure Probabilities for Strong Nonlinear Models, *ASCE-ASME J Risk and*
849 *Uncert in Engrg Sys Part B Mech Engrg* 5 (2019).
- 850 [104] R. Schöbi, B. Sudret, Global sensitivity analysis in the context of imprecise probabilities (p-boxes)
851 using sparse polynomial chaos expansions, *Rel. Eng. Syst. Saf.* 187 (2019) 129 – 141. Sensitivity
852 Analysis of Model Output.

853 [105] M. G. R. Faes, M. Daub, M. Beer, Engineering analysis with imprecise probabilities: a state-of-the-
854 art review on p-boxes, Proceedings of the 7th Asian-Pacific Symposium on Structural Reliability
855 and its Applications, APSSRA 2020 (2020).