

Dynamic semantic world models and increased situational awareness for highly automated inland waterway transport

Senne Van Baelen^{1,*}, Gerben Peeters¹, Herman Bruyninckx^{1,2}, Paolo Pilozzi¹, Peter Slaets,¹

¹KU Leuven, Department of Mechanical Engineering, A. Vesaliusstraat 13, B-3000 Leuven, Belgium

²TU Eindhoven, Faculty of Mechanical Engineering, Eindhoven, the Netherlands

Correspondence*:

Senne Van Baelen

senne.vanbaelen@kuleuven.be

ABSTRACT

Automated surface vessels must integrate many tasks and motions at the same time. Moreover, vessels as well as monitoring and control services need to react to physical disturbances, to dynamically allocate software resources available within a particular environment, and to communicate with various other actors in particular navigation and traffic situations. In this work, the responsibility for the situational awareness is given to a mediator that decides *how*: to (i) assess the impact of the actual physical environment on the quality and performance of the ongoing task executions; (ii) to make sure these tasks satisfy the system requirements; and (iii) to be robust against disturbances.

This paper proposes a set of semantic world models within the context of inland waterway transport, and discusses policies and methodologies to compose, use, and connect these models. Model-conform entities and relations are composed dynamically, that is, corresponding to the opportunities and challenges offered by the actual situation. The semantic world models discussed in this work are divided into two main categories: (i) the semantic description of a vessel's *own* properties and relationships, called the *internal world model*, or body model, and (ii) the semantic description of its local environment, called the *external world model*, or map. A range of experiments illustrate the potential of using such models to decide the reactions of the application at runtime. The mediator can be a human operator, a semantic map, or the vessel itself. Furthermore, three dynamic, context-dependent, ship domains are integrated in the map as two-dimensional geometric entities around a moving vessel to increase the situational awareness of automated vessels. Their geometric representations depend on the associated relations; for example, with: (i) the motion of the vessel, (ii) the actual, desired, or hypothesised tasks, (iii) perception sensor information, and (iv) other geometries, e.g., features from the Inland Electronic Navigational Charts. The ability to unambiguously understand the environmental context, as well as the motion or position of surrounding entities, allows for resource-efficient and straightforward control decisions. The semantic world models facilitate knowledge sharing between actors, and significantly enhance explainability of the actors' behaviour and control decisions.

Keywords: inland navigation, modelling, situational awareness, semantic maps, world models, navigation charts, COLREGs

1 INTRODUCTION

The European Inland Waterway Transport (IWT) sector has a substantial yet under-exploited potential. A dense and distributed network of rivers and canals flows through the European hinterland, especially in the more northern areas. Compared to the dominating European road-based freight transport, the IWT sector has lower external costs (European Commission, 2019; van Essen, 2018; Essen et al., 2016). Over the recent years, these lower external costs—together with the expected increase in cargo flow in the upcoming decades—have induced a collective effort by governments, research institutions, and companies to generate a modal shift from road-based to waterway-based transport. For example, the European Commission has set the ambitious goal to push 30% of road freight transport (tkm), longer than 300km, to rail and water-borne transport between 2011 and 2030, and 50% by 2050 (Kallas, 2011).

Today, most novel infrastructural and technological IWT developments focus on large waterways of type CEMT III–V (E. Verbergh, 2019). Moreover, over the last few decades, cargo transport via smaller waterways—which enable connections to deeper parts of the European hinterland, and facilitates integration into the synchromodal transport network—decreased considerably (Tavasszy et al., 2015). This decrease can be partially attributed to: higher relative crew cost for smaller vessels, a lack of technological improvements, inadequate smaller waterway maintenance, and negative investment climate in the sector (Essen et al., 2016; Sys and Vanelander, 2011).

Various local and European projects and developments contribute(d) to re-discovering the full capacity of the inland waterways, as well as to systems-of-systems automation and coordination. Two novel smaller vessel concepts (CEMT I–II) were recently introduced and constructed (The European Commission, 2019; Verbergh, 2019) which exhibit a higher automation potential compared to older vessels (Peeters, 2021). Furthermore, the AVATAR (2021) project aims to develop urban vessels that are capable of navigating small rivers and canals in a highly automated manner. In addition, the European IW-NET (2021) and AUTOBarge (2021) projects investigate the integration of different automated vessels in the so-called “experimental living labs”.

Highly automated vessels and corresponding applications, as well as remote control and monitoring services, must integrate many tasks and motions at the same time. Moreover, they need to account for physical disturbances, and dynamically allocate software resources available within a particular environment (Bruyninckx, 2021). To enable these higher levels of automation for inland cargo vessels and their associated shoreside infrastructure, new IWT developments will need to incorporate *shared* situational awareness, and define, or extend formal knowledge systems accordingly (Peeters, 2021). In this regard, new developments can substantially benefit from a set of semantic world models, as part of this knowledge system, since it would allow co-operating (sub)systems to unambiguously interact with each other, as to understand environmental context or situation in which they operate. These models contribute to making safe, explainable, and resource-efficient control decisions.

1.1 Related work and developments

1.1.1 Situational awareness for vessels and operators

Argüelles et al. (2021) compiled a list of the main reported causes for ship collisions involving human errors. The authors argue, in compliance with findings in Sotiralis et al. (2016); Ung (2019); Weng et al. (2019); Yildirim et al. (2019); Huang et al. (2020), that the main causes for such collisions are: failure to

take early action¹, misinterpretation of collaborative regulations (COLREGs), and lacking communication between On-board Officers in charge of the Navigational Watch (OONWs)². In other words, a lack of situational awareness (SA) for vessels and their operators (whether local or remote) lies at the root of these causes.

Then, Argüelles et al. (2021) proceed to investigate how to decrease collision risks, with a focus on low-level vessel-to-vessel communication, and dialogues. That is, by means of onboard Programmable Logic Controllers (PLCs) –in dialogue with OONWs– using the onboard AIS for vessel-to-vessel communication. Furthermore, as no standard for collision avoidance messages exists (IMO, 2001), Argüelles et al. (2021) proposes predefined messages and associated pictograms.

These developments emphasise the need for clear, explainable knowledge systems that can significantly enhance interactions between vessels, and between other related systems. In particular, the unambiguous application of COLREGs that are active in a certain situation, and the resulting actions/manoeuvres that need to be conducted, either implied or negotiated. As such, *Reconfigurable* and *explainable* ship domains can become a key communication and *visualisation* tool towards communication and visualisation, as well as reasoning.

1.1.2 Ship domains

The term “ship domains” most likely originated from Fuji and Tanaka (1971), whom defined it as a two-dimensional ellipsoid surrounding a ship – which other ships must avoid. Since then, many definitions of ship domains have occurred. In their review study, Szlapczynski and Szlapczynska (2017) distinguished three—partially overlapping—ship domain groups based on: (i) theoretical analyses; (ii) expert knowledge; and (iii) empirical methods. They concluded that the factors that the ship domains take into account are usually more meaningful than the exact domain shapes themselves, although the latter are often more emphasised in the literature. In addition, they noted that while many collision avoidance studies refer to ship domains, not many of them actually use these ship domains (Szlapczynski and Szlapczynska, 2017) in an operational context.

It should be noted that more context has been added to ship domain models by tuning domains for different geographical regions Hansen et al. (2013) and Wang and Chin (2016) and for different navigational situations. For example, as related to navigational situations, Liu et al. (2016) differentiated ship domains for the following four situations: i) navigating along the channel; ii) crossing the channel; iii) another flow joining; and iv) turning. This paper focuses on adding the higher level, often symbolic, relationships of the present situation and its context by explaining: *why* a ship domain was used, *what* it represents in this context, *how* the domains were computed, and *how* shared information can be interpreted by other entities.

1.1.3 Semantic world models for maps and robots

This work uses the term “world model” for any formal representation of the world, as part of the knowledge representation of reality and the real world, and conforms to the modelling policies described in Bruyninckx (2021), that, among other things, give the so-called open-world assumption a place in the policy of making models.

Semantic knowledge, i.e., formalised knowledge about objects, motion, tasks, events, and relations in the robot’s environment, can help both robots and human operators to perform specific tasks more effectively, and more importantly, allow for more enhanced systems-of-systems automation and

¹ It is important to note here that a failure to take early action—i.e., without malintent—is merely a consequence of the ability to take early action, hence, it fully relies on SA.

² Although the COLREGs, i.e., regulations for decision making, have been designed to determine vessel manoeuvres without requiring any communication between the vessels, it does demand the use of all available means to obtain optimum situational awareness (COLREGs rule 5) (Tsimplis and Papadas, 2019).

coordination (Bruyninckx, 2021). A map where its features, in addition to spatial information about the environment, are mapped to entities of known classes, and, furthermore, that knowledge about entities is available for reasoning in some knowledge base with an associated reasoning engine, is called a semantic map (Nüchter and Hertzberg, 2008; Landsiedel et al., 2017).

Maps used by robots and vessel operators, both remote and onboard, typically consist of representation based on metrical and/or topological data structures. Additionally, these maps can be extended with sensor-specific data, for instance, pointclouds from perceptive sensors, possibly with additional information about texture. However, these representations do not take information about the objects and their properties into account, nor do they incorporate relations between specific objects and their environment, or a specific operational context (Lang et al., 2014).

1.2 Research Objectives

This study proposes, applies and experimentally verifies a set of semantic *world models* for maps and vessels. As such, it is investigated *how* these models can enable (i) the dynamic—context or situation-based—adaptation of ship domains, and (ii) the unambiguous representation of entities in a local, semantic map.

The semantic descriptions in these world models, for instance of the geometry of features, can provide knowledge of where objects are with respect to each other in space and time. Position and motion of entities are always relative. Therefore, this work aims to model position and motion not as a property of an entity, but as a property of the relation between two entities. Consequently, such relations serve as the foundation for the dynamic world-model relations investigated in this paper, for example, the interactions between the local map and the vessel.

The following world-model relations will be handled explicitly or implicitly: (i) geometry–geometry: the representations of the shapes of objects and robots, and how they shape the motion constraints between objects, (ii) geometry–perception: the representations of how properties of objects are detectable in sensor data, (iii) geometry–motion: the representations of how properties of objects are targets of the motions of the robot, and (iv) geometry–task: the representations of actual, desired, hypothesised, etc. states of the world, depending on the task requirements.

Throughout the experiments in Section 3.3.3, the following list of sub-objectives are dealt with:

- Define relations with (meta) models of the sensor subsystem, as part of the body model, that influence the geometric representation of the ship domains, for example, based on a geometry–geometry relation (Result 4.1), or a geometry–perception relation (Result 4.6).
- Enable dynamic configuration and adaptation of ship domains by introducing geometry–motion relations with vessel body entities, and geometry–geometry relations with map entities (Results 4.2 and 4.4, resp.).
- Allow for dynamic adaptations of both the hydrodynamic model and the vessel’s ship domains, by defining a descriptive³ model related to the vessel’s hydrodynamic characteristics, and adequate relations with other vessel subsystems (Result 4.3).
- Extend a local map with additional semantic features and metadata, to allow for unambiguously use and sharing of this map by other actors (Result 4.5).

³ The words symbolic and descriptive, both referring to the model representation, are used interchangeably throughout this work.

- Integrate additional geometric entities at runtime that can help vessels and human operators to correctly interpret and automatically comply to COLREG rules in a particular situation (Results 4.6 and 4.7).

2 MATERIALS

The main materials used throughout this work consist of four parts: (i) the semantic concepts for geometric world model compositions, handled by Section 2.1, (ii) the research vessel named “the Cogge” (Peeters et al., 2020b) which relates to the body model, detailed in Section 2.2, (iii) the (Inland) Electronic Navigational Chart objects as static features which relate to the map, discussed in Section 2.3, and (iv) the hydrodynamic model, listed in Section 2.4 which, to some extent describes the physical connection between the vessel and the world (i.e., relating concepts of Section 2.2 and Section 2.3).

2.1 Semantic concepts for geometric world model compositions

The main semantic concepts for geometries in this work are (i) the entities of points, vectors, line segments, and polygons, (ii) the relation of a map as an ordered or unordered set of geometric entities, (iii) the relations of instantaneous motion of the vessel, and of its ship domains, and (iv) the rigid body as a constraint on these motion relations. This work adopts a number of policies described in (Bruyninckx, 2021) to provide `Semantic_IDs` and relations to the entities described above. Consequently, this work uses the following two unique identifiers for a `Semantic_ID`⁴:

- **ID** (“model ID”): a unique identifier with which the entity can be referred to, unambiguously, in another part of this model, or in other models.
- **{MID}** (“meta model ID”): a (set of) unique identifier(s) that each refer to a meta model, that is, a model in which the constraints are defined that describe the well-formedness of those entities and relations that the model uses from that particular meta model.

In Bruyninckx (2021), it is suggested all geometric entities are compositions of the `Point` model, whereas this work makes a distinction between two geometric feature compositions. The first one involves dynamically composed geometries from external datasets such as (I)ENC or OpenStreetMap, which—on the application level—can be queried from a database, and where the results can contain any of the types defined by the GeoJSON data format⁵. These features merely have a `Semantic_ID` and relations of the whole entity, and not on every coordinate. The second one includes geometries that *are* composed from a `Point` model. The latter can be desirable in a robotics context, as most sensors in robotics measure points, and not lines, planes, or bodies. Moreover, the concept of uncertainty is well-defined for points, but not for lines, planes, or bodies.

A mereo-logical⁶ model of a `Point` in two-dimensional Euclidean space (E2), with `Semantic_ID` metadata, is referred to as `{Point: aPoint}` (with “aPoint” the name for this `Point` entity), and represented in full as follows:

Listing 1. Mereo-logical model of a Point

```
{
```

⁴ An optional, third, meta meta model ID (MMID) can be used: a set of unique identifiers that each point to a meta meta model of this model, needed to transform the model to another formal representation, while keeping the meaning of the model unchanged. However, this is *not* included in this work.

⁵ the GeoJSON format contains the following geometric objects: “Point”, “MultiPoint”, “LineString”, “MultiLineString”, “Polygon”, “MultiPolygon”, and “GeometryCollection”.

⁶ In this work, a mereo-logical representation refers to the simplest interpretation (or also the “highest” level of abstraction). A mereo-logical model just represents the parts that make up the world, without any additional structure or behaviour.

```
{ ID: aPoint-ID } // a unique identity code
{ MID: [Point, Geometry, E2 ] },
}
```

Other relevant representations of geometric entities include:

- **Vector**: an ordered list of two Point entities that adds three constraints: (i) the ordering that gives an orientation to the Vector, (ii) that list contains exactly two members (and not all the points on the line in between), and (iii) the two Points in the list are different.
- **Simplex**: (in a 2D space) an ordered list of two non-colinear Vectors, with the constraint that both have the same start point
- **LineString** (or polyline): as an ordered set of points. It is equivalent to an ordered list of Vectors, with the constraints that (i) the start point of one Vector is the end point of the previous Vector in the ordered set, (ii) each Point belongs to exactly two Vectors, except for the start point of the first Vector and the end point of the last Vector
- **Polygon**: similar, with the extra constraint relation that the two not yet connected start and end Points must now coincide. The following notations are used
- **Frame**: it adds two metric constraints to the Simplex entity: (i) the length of each Line segment is the unity length, and (ii) the Line segments are perpendicular (or orthogonal). The orientation of a Frame is typically an essential attribute, because of its use to represent coordinates

Models of these entities are shown in Listing 2.

Listing 2. Models for geometric entities

```
{ Vector: [{start: aPoint-ID}, {end: bPoint-ID} ] }
{ Simplex: [{start: aPoint-ID}, bPoint-ID, cPoint-ID] }
{ LineString: [aPoint-ID, bPoint-ID,..., zPoint-ID] }
{ Polygon: [{start: aPoint-ID}, bPoint-ID, ..., zPoint-ID, {end: aPoint-ID}] }
{ Frame: [{origin: aPoint-ID}, {end: bPoint-ID}, {end: cPoint-ID}] }
```

When no explicit name of an entity is known, or defined, this work uses the notation `aModelName` (prepending “a”, “b”, etc. to the model name). The associated IDs of an entity are named with the name of the entity, added with the postfix “-ID”.

2.2 Cogge: an unmanned inland cargo vessel

Peeters et al. (2020b) constructed a scale model unmanned inland cargo vessel to investigate the automation potential of its real-size counterpart. Figure 1 summarises the relevant technical details of this vessel, named *the Cogge*: (a) shows its three dimensional geometry, together with its body-fixed reference frame, (b) draws a two dimensional bottom view of *the Cogge*, which illustrates the position of its actuation system, and (c) provides a communication scheme of the main onboard components. Note that a video of this vessel in operation is included in the Supplementary Material (S0).

2.3 The inland navigation charts ((I)ENC)

Navigational charts for vessel operators, vessel autonomy systems, remote control operators, and remote monitoring services, use (I)ENC charts as the de facto standard dataset. These charts are typically displayed, and augmented with sensor data, in an (Inland) Electronic Chart Display and Information Systems (ECDIS). These chart displays have proven to be an indispensable navigational aid for operators. It already contains a standardised set of object models, including a limited set of semantic tags in the form of attributes. However,

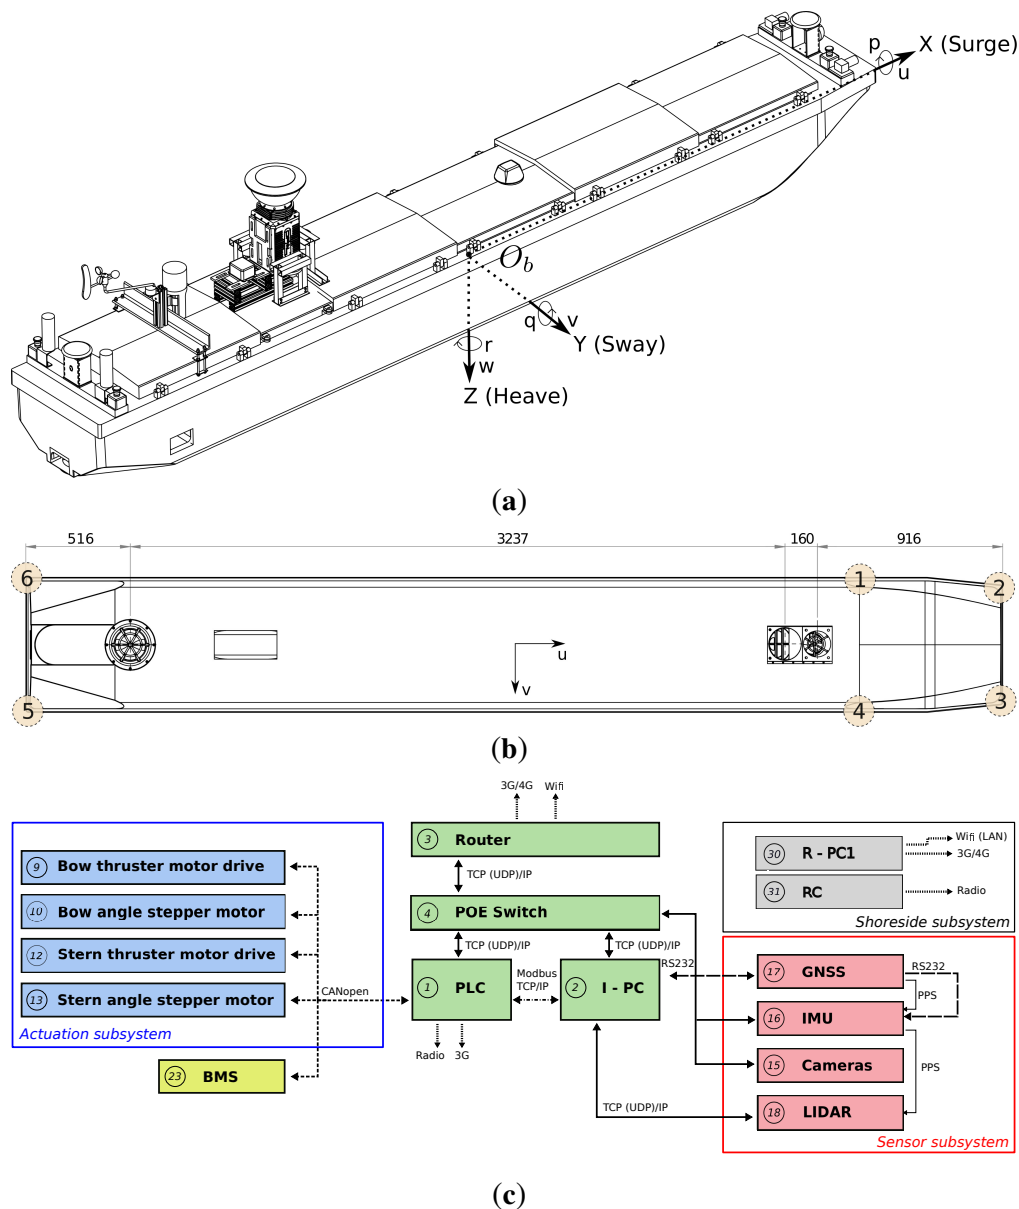


Figure 1. Geometry of the Cogge: (a) full geometry and reference frames, (b) bottom view of the hull with longitudinal dimensions, and (c) main components and communication links (as a single vessel). Figures (a) and (b) were modified from Peeters et al. (2020c), and (c) reproduced from Peeters et al. (2020d).

they lack adequate semantics for situational aware reasoning in highly automated environments, and are not dynamic. For instance, they are—depending on the administrator—only updated on a yearly basis, there are no accuracy indications of chart features, additional (dynamic) data such as RADAR pointclouds or data from Automatic Identification Systems (AIS) is added as a separate, *independent* layer, and there are no policies in play for dynamically defining, updating, and adding entities and relations between these objects. This means, for the purpose of this work, that the (I)ENC charts serve as the static feature base of the map, which is extended with additional relations and semantic information, and context-dependent functionality at runtime.

Tsou (2016) uses ECDIS as a platform for constructing a collision-avoidance decision support system. The ENC features and their corresponding geodetic coordinates, together with data from sensors such as

AIS, integrated with the ECDIS, are used to predict areas of danger within a specific environment, and to plan the optimal route accordingly. This implies the need for rather complex geographical computations, whereas considering the ranges (up to one or several kilometres) to which these collision avoidance schemes apply, a local Cartesian reference systems, and corresponding map features with local relative coordinates, could significantly reduce the reasoning complexity, and thus reduce the need for computational resources. Moreover, it allows for a more straightforward integration with other software components, for instance towards control and coordination of the robot.

Global maps and reasoning based on (projected) geographic features are relevant for mid- and long-term planning and decision making, that is, within a timeframe of minutes up to days. For these purposes, several established tools are available, not in the least spatial indexing and querying of features in a database (often with a GIS extension). However, tasks that require short-term (seconds up to minutes) reasoning and decision making, knowledge about the dynamic body models of systems, and/or relative information about sensor data or the operational environment, could benefit substantially from interacting with local maps and features. This is especially true in highly dynamic environments. As such, the geometric features and models used in this paper consist of dynamically generated, local coordinates. Features related to a vessel's navigation environment, mainly constructed from (external) global coordinates, contain local tangent plane coordinates (East-North-Up). Other local frames that are part of the world model, such as body-fixed sensor frames, will include at least one symbolic relation with a point on the local reference frame. Figure 2 shows both the ECDIS map and the corresponding local map used throughout this work.

2.4 Hydrodynamic modelling

The rigid-body kinetics of a vessel can be written in a vectorial setting according to Fossen (1991):

$$\mathbf{M}_{RB}\dot{\boldsymbol{\nu}} + \mathbf{C}_{RB}(\boldsymbol{\nu})\boldsymbol{\nu} = \boldsymbol{\tau}_{RB}, \quad (1)$$

where $\mathbf{M}_{RB}$ represents the rigid-body inertia matrix, $\mathbf{C}_{RB}$ the rigid-body Coriolis and centripetal matrix, $\boldsymbol{\tau}_{RB} = [X, Y, Z, K, M, N]^T$ the vector of generalised forces, and $\boldsymbol{\nu} = [u, v, w, p, q, r]^T$ the generalized velocity vector, when using the SNAME convention SNAME (1950). Here $\boldsymbol{\tau}_{RB}$ can be separated into:

$$\boldsymbol{\tau}_{RB} = \boldsymbol{\tau}_{hydrodynamic} + \boldsymbol{\tau}_{hydrostatic} + \boldsymbol{\tau}_{wind} + \boldsymbol{\tau}_{waves} + \boldsymbol{\tau}_{control} \quad (2)$$

In addition, one can rearrange the terms into the following vectorial setting Fossen (1994), Fossen and Fjellstad (1995):

$$\underbrace{\mathbf{C}_{RB}(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{M}_{RB}\dot{\boldsymbol{\nu}}}_{\text{rigid-body}} + \underbrace{\mathbf{C}_A(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{D}(\boldsymbol{\nu})\boldsymbol{\nu} + \mathbf{M}_A\dot{\boldsymbol{\nu}}}_{\text{hydrodynamic}} + \underbrace{\mathbf{g}(\boldsymbol{\eta}) + \mathbf{g}_0}_{\text{hydrostatic}} = \boldsymbol{\tau}_{control} + \boldsymbol{\tau}_{wave} + \boldsymbol{\tau}_{wind} \quad (3)$$

with:

- $\mathbf{M}_{RB}(\boldsymbol{\nu})$ and $\mathbf{M}_A(\boldsymbol{\nu})$: system inertia matrices, (rigid body and added mass, resp.)
- $\mathbf{C}_{RB}(\boldsymbol{\nu})$ and $\mathbf{C}_A(\boldsymbol{\nu})$: Coriolis-centripetal matrices, (rigid body and added mass, resp.)
- $\mathbf{D}(\boldsymbol{\nu})$: damping matrix
- $\mathbf{g}(\boldsymbol{\eta})$: vector of gravitational/buoyancy forces and moments
- $\mathbf{g}_0$ vector used for pretrimming (ballast control)
- $\boldsymbol{\tau}$ external forces (control, wind, and wave)

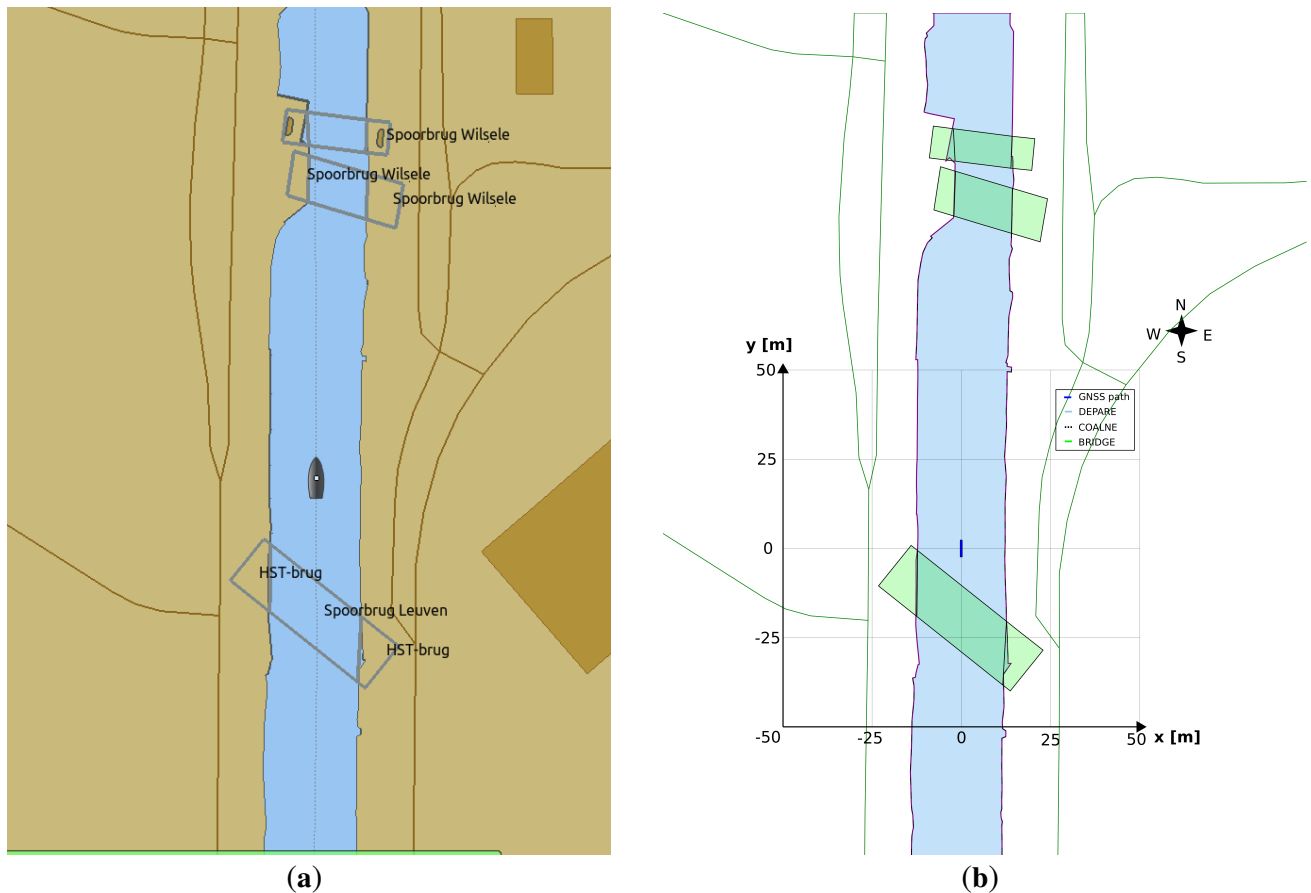


Figure 2. OpenCPN ECDIS display, with global ENC features projected onto screen (a), versus a local map (b) with features in local ENU coordinates, generated from global ENC dataset, displayed as a vector image (in SVG).

Here the modular matrix–vector notation can leverage matrix properties such as symmetry, skew-symmetry, and positiveness of matrices Fossen (2011).

This study models the planar motions of *the Cogge*: $\nu = [u, v, r]^T$. Hence the impact of heave, roll, and pitch motions are neglected, together with their hydrostatic restoring forces, i.e., $\tau_{hydrostatic} = 0$. The vessel will operate under the Manoeuvring Theory framework Fossen (2011) assumptions, $\tau_{wave} = 0$, i.e., the (hydrodynamic) manoeuvring coefficients can be assumed to be frequency-independent, in calm water without current. Further assumptions include: a homogeneous mass distribution, the ur-plane symmetry of the vessel, i.e., $I_{uv} = I_{vr} = 0$, the origin of the body-frame (CO) positioned on the centre line of the vessel, i.e., $v_g = 0$, calculating the added mass terms in CO, and aligning the CO axes with the principal inertia axes of the vessel.

The damping matrix will be modelled with a linear and non-linear part: $D(\nu) = D_L + D_N(\nu)$. The linear damping components are important for the lower speed manoeuvres Fossen (2011). The nonlinear damping will be modelled by a quadratic surge resistance Lewis (1989) for the surge motion, and by a cross-flow-drag model fitted Blanke (1981) to second-order modulus functions Fedyaevsky and Sobolev (1964) for the sway–yaw motions Fossen (2011). More precisely, a simplified form will be used Blanke (1981), normally intended for larger vessels, but providing sufficient parameters to capture the motions of *the Cogge* for the purpose of this study.

For the control forces vector, Peeters et al. (2020c) concluded that thruster models which neglect the vessel-speed-dependent thrust losses can still suffice to capture and describe the main hydrodynamic vessel behaviour in pure surge, sway, or yaw motion. Therefore, vessel-speed-independent thruster models will be used throughout this study. Furthermore, wind forces are modelled as seen in Fossen (2011). with associated wind coefficients as derived by Isherwood, R. M. (1972). Under the abovementioned assumptions, Equation (3) refines to:

$$\underbrace{M_{RB}\dot{\nu} + C_{RB}(\nu)\nu}_{\text{rigid-body}} + \underbrace{M_A\dot{\nu} + C_A(\nu)\nu + D_N(\nu)\nu + D_L\nu}_{\text{hydrodynamic}} = \tau_{\text{control}} + \tau_{\text{wind}} \quad (4)$$

Appendix A details the resulting full component model, and its identified or estimated coefficients can be found in Listing 19.

3 METHODS

As discussed in Section 1.2, this paper focusses on vessel-world interactions, employing internal and external world models, as related to IW navigation along a channel. Section 3.1 and Section 3.2, respectively, describe the internal (i.e., body) and external (i.e., map) world models. Thereupon, Section 3.3 illustrates such potential dynamic interactions, as well as maintained relations, between world models, by means of ship domains (SDs) and map domains (MDs). The high-level architecture depicted in figure 3 gives an overview of the relations and model-conform entities discussed in this paper. While this figure includes only four entities (map, environment, two vessels), it should be noted that relations with other (external) entities can co-exist as well. The corresponding experiments mainly focus on semantic models (grey ellipses), as well as on context-dependent ship and map domains (green rectangles).

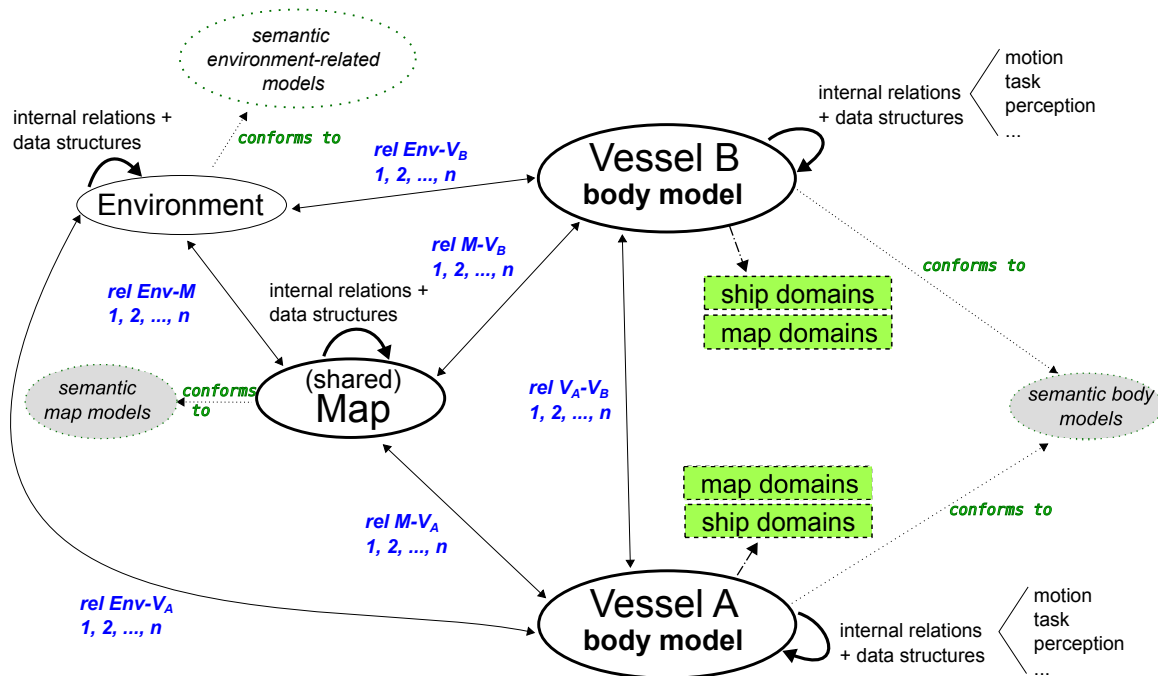


Figure 3. High-level architecture for model-integration and relations discussed throughout this paper, applied to a situation with two interacting vessels. Relations (rel) in blue. Grey ellipses (models) and green rectangles (ship and map-domains) are the main focus areas of this paper.

Be noted that the here-discussed models, represented using a JSON-like syntax⁷, mainly aim to demonstrate a methodology of composing such models. As such, not every symbolic model and corresponding data structure(s) used in Section 3.3 is listed in full throughout this section. Furthermore, whenever a symbolic model does not provide additional insights on model compositions, the data structure is typically listed in this work. While these data structures already provide a formal basis for situational-aware applications (see Section 3.3), these models are not complete or meant to be generic. Rather they serve the purpose of a starting point on which (external) input, test results, and other feedback can be provided towards further development (see the discussion of Section 5).

3.1 Semantic Internal World Model or Body Model

World models related to the vessel and its subsystems are part of the body model. Figure 1 already showed the main components of the research vessel *the Cogge*. The body models discussed here aim to provide adequate semantic information to enable subsequent reasoning, and connecting these models with the external world model, i.e., the map. In that sense, the following entities and relations are considered relevant to the body model:

- **Vessel**: represents the vessel (main entity), with relations to other entities described hereafter.
- **Hull**: Describes characteristics about the hull of a vessel, e.g., geometries.
- **Hydrodynamic**: hydrodynamic model structures and their parameters (to support context-driven dynamic configuration), as well as their relations to control tasks of the vessel.
- **Actuation**: vessel actuation model, with lower-level models for bow and stern (potentially more). Both bow and stern contain an explicit geometric relation with the **Hull**
- **Sensors**: the sensor subsystem, further divided into:
 - **Proprio-ceptive**: GNSS and IMU sensors (for Cogge)
 - **Extero-ceptive**: LiDAR and cameras (for Cogge)
 - **Carto-ceptive**: available semantic maps for a vessel or service
- **Communication**: available communication channels, protocols, etc., divided into internal communication and external communication.

Note that, for example, AIS-related models are part of the **Communication** entity, however, a detailed specification of the communication entity and its sub-entities is outside the scope of this paper. Additionally, note that the existence of a set of (meta) meta models relevant to the IWT context is assumed, with the most generic meta model: $\{MID: IWT\}$, providing domain-specific metadata for the models by means of the MID of the **Semantic_ID**.

3.1.1 Vessel

Listing 3 provides a high-level symbolic model for IWT vessels, with a limited set of properties. Its ID is related to the MMSI property, as it already provides a unique, 9-digit identifier for a vessel.

Listing 3. Iwt_Vessel_Name_Mmsi_Cemt model

```
{ Iwt_Vessel_Name_Mmsi_Cemt :
  { {
      name: { Name: aVesselName } },
    {
      mmsi: { MMSI: aMmsi } },
    {
      classification: { CEMT: aCemtClass } },
    {
      ID: Vessel-9digitNr } ,
```

⁷ Various standardised data formats can be used to formally describe elements, e.g., the JSON or XML schemas. For this text, some minor adjustments to the JSON syntax are applied to increase readability.

```

    {
        MID: { IWT, MMSI, CemtClass, Name } }
    }
}

```

The meta-models `IWT`, `MMSI`, `CemtClass`, and `Name` contain information about data types, description, units, among other things related to the attributes in the `Iwt_Vessel` model. A data structure model adds numerical values to the symbolic model properties, as an instance-of the `Iwt_Vessel_Name_Mmsi_Cemt` model:

Listing 4. `Iwt_Vessel_Name_Mmsi_Cemt_Data` instance

```

{ Iwt_Vessel_Name_Mmsi_Cemt_Data:
  { {
      name: Cogge },
    {
      mmsi: 000000001 },
    { classification: CEMENT-I },
    { ID: Vessel-Data-000000001 },
    {
      MID: { IWT }}
  }
}

```

An `Iwt_Vessel_Name_Mmsi_Cemt` entity is in several relations. For example: it has-a `Iwt_Hull_Base` entity, and, inversely, the `Iwt_Hull_Base` is part-of (or belongs-to) an `Iwt_Vessel_Name_Mmsi_Cemt` entity.

3.1.2 Hull

Similar to the above, a model for the vessel's hull can be composed (i.e., `Iwt_Hull_Base`). It provides sufficient symbolic information on data types, units, etc. Note that this symbolic model is not provided explicitly, instead, Listing 5 defines the associated data structure model of the vessel's hull:

Listing 5. `Iwt_Hull_Base_Data` instance

```

{ Iwt_Hull_Base_Data :
  {
    { bodyMass: 500, },
    { draftMax: 0.35 },
    { blockCoefficient: 0.95 },
    { length: 4.81 },
    { beam: 0.63 },
    { height: 0.43 },
    { ID: Hull-Vessel-Data-000000001 },
    { MID: { IWT }}
  }
}

```

In Listing 6, a set of already defined mereo-logical `Point` entities is assumed, according to the model in Listing 1. These include a body-fixed origin o_b : `PaPnt0` (Pa refers to principle axis), together with `PaPntU` (on longitudinal vessel axis), `PaPntV` (on transversal vessel axis), and `PaPntR` (on normal axis). Moreover, the origin point `PntCo` is defined, and relates to a point of the vessel that midships in the water line (this can be modelled as a constraint). In our case, the explicit relation exists between `PaPnt0` and `PntCo`, that is, the centroid of the vessel and the body-fixed origin have the same absolute position. The associated model for the vessel's principal axes, also used in 3.1.3, is defined in 6.

Listing 6. `Iwt_Vessel_Principal_Axes_Frame` model

```
{ Iwt_Vessel_Principal_Axes_Frame:
  { {      frame: { Frame: [{origin: PaPnt0-ID},
                           {end: PaPntU-ID},
                           {end: PaPntV-ID},
                           {end: PaPntR-ID}] }},
    {      ID: Vessel-PA-Frame-ID },
    {      MID: { IWT, Frame }}
  }
}
```

To enhance in-model reference clarity, an entity conform to the `Iwt_Vessel_Principal_Axes_Frame` model is hereafter called PA, which is part-of the `Iwt_Vessel_Name_Mmsi_Cemt` entity. Other relations with this PA are discussed in Section 3.2. Assuming the points `PntGeom1`, ... `PntGeom6`, are also symbolically defined, corresponding to the top view of the vessel of the vessel in Figure 1, a `Coordinate` model is constructed for these points. This model adds (i) numerical values to the earlier defined mereo-logical models defined already, as a position relative to an previously defined frame, and (ii) the semantic tags for identifying the correct interpretation of those values. For the first point entity `PntGeom1`, the `Coordinate` model is defined in Listing 7.

Listing 7. `Coordinate_Point_Point_Frame_Meter_Data` instance

```
{ Coordinate_Point_Point_Frame_Meter_Data:
  { {      relation: Position },
    {      of: { Point: PntGeom1 },
      { with_respect_to: { Point: PaPnt0 },
        {      as_seen_by: { Frame: aPA.frame } },
        {      coordinates: [ {PA.frame.u: -0.315},
                              {PA.frame.v: 2.415} ,
                              {PA.frame.r: -0.2} ] },
        {      units: meter },
        {      ID: Coordinate-PntGeom1-ID },
        {      MID: { Point, Frame, QUDT, E2 }}
      }
    }
}
```

Note that the meta model QUDT is used here as well, including abstract representations of Quantity, Unit, Dimension, and (data) Type. The same `Coordinate` models are constructed for the other points in, identified in the 2D top view. By means of combining the aforementioned `Point` entities, various geometries can be composed. Since this work explicitly uses the 2D top view geometry of the vessel's hull in the semantic map (see Section 3.2), as well as for the ship domains (see Section 3.3.1), a model is constructed for this 2D top view, as a `Projection` relation:

Listing 8. `Multiview_Projection_Entity_Plane_Type_Result` model

```
{ Multiview_Projection_Entity_Plane_Type_Result:
  { {      relation: Projection },
    {      from: { Entity: aIwt_Hull_Base } },
    {      to: { Plane: [ PaPnt0-ID, PaPntU-ID, PaPntV-ID ] } },
    {      along_axis: PA.frame.r },
    {      view_type: Multiview.topView },
    {      result: { Polygon: [{start: PntGeom1-ID},
                              PntGeom2-ID, ...,
                              {end: PntGeomEnd-ID}] } },
    {      ID: HullGeometry-TopView-ID },
  }
```

```

    {
        MID: { IWT, Entity, Polygon, Plane, Multiview, E2 }}
    }
}

```

The `along_axis` property is to some extent redundant to the `Plane` of the vessel. The `Plane` is defined as a join of three `Points`, even though other definitions are possible as well, for instance, a join of intersecting `Lines`.

Note that other points can be defined, part of the `Rigid.Body` of the vessel. By definition, this implies that `Motion` preserves relative distances between all `Points`, and thus any derived properties such as length, angle, surface area, and volume.

3.1.3 Hydrodynamic

The hydrodynamic behaviour of a vessel is not only relevant to simulation or control software, but is also relevant to (higher level) reasoning tasks and visualising ship domains. It is important to note that different behavioral models of a vessel can be appropriate to different situations. Even though a single model can capture behavior appropriate to all situations, such a “one-size-fits-all” hydrodynamical model is often overly complex for the situation at hand. Hence, considering computational efficiency, accuracy, degrees of freedom, observability, controllability, available identified coefficients, among many other factors, can motivate context-related simplifications.

Therefore, dynamic, context-dependent composability is a desired property of hydrodynamic models. In this work, a set of meta models are assumed to be available, for instance, `Hydro_Equation_Manoeuvring_F` is used as the meta model for Equation 3. Other meta models relate to Fossen (2011). In this work, entities that conform to such models are here as follows: `aHydro_States_F`, `aHydro_Ext_Forces_F`, and `aHydro_Coefficients_F`.

First, three additional body-fixed reference points are defined: `PntCg` (center of gravity), `PntCB` (center of buoyancy), and `PntCf` (center of flotation). Coordinate models as seen in Listing 7 can be used to represent these points. For our vessel, *the Cogge*, it is a reasonable assumption that all three `Points` have the exact absolute position as `PaPnt0`. The model used in this study, as shown in Listing 9 considers three degrees of freedom (surge, sway, yaw).

Listing 9. Iwt_Hydrodynamic_3DOF_States_Forces_Coef model

```

{ Iwt_Hydrodynamic_3DOF_States_Forces_Coef :
  { { principal_axis: { Frame: PA.frame } },
    { states: { Hydro_States_F:
      [aHydro_States_F.surge,
       aHydro_States_F.sway,
       aHydro_States_F.yaw] } },
    { external_forces: { Hydro_Ext_Forces_F:
      [aHydro_Ext_Forces_F.control,
       aHydro_Ext_Forces_F.wind,
       aHydro_Ext_Forces_F.wave] } },
    { center_of_gravity: { Point: PntCg } },
    { center_of_buoyancy: { Point: PntCb } },
    { center_of_flotation: { Point: PntCf } },
    { coefficients: { Hydro_Coefficients_F: aHydro_Coefficients_F },
      ID: Iwt-Hydrodynamic-3DOF-ID },
    { MID: { IWT, Entity, Point, Hydro_Equation_Manoeuvring_F,
      Hydro_States_F, Hydro_Ext_Forces_F,
      Hydro_Coefficients_F } }
  }
}

```

}

Corresponding data structures for the states and forces can be constructed as an instance-of the respective embedded symbolic models of Listing 9. Similarly, a data structure for the coefficients is constructed, as an instance-of `Hydro_Coefficients_F`. The values for these coefficients, used in the data structure, can be found in Section A.1.

With respect to the behaviour of the real vessel, and as discussed in Section 3.3.3, a set of constraint relations are defined as well, mostly relating to the motion of the vessel. They can apply to one or several matrix components as seen in Section A.1. One example is a switch between linear damping (D_L), and linear+non-linear damping ($D_N + D_L$) when the vessel exceeds some velocity threshold. This threshold was determined experimentally, and can be modelled to a constraint. Both the velocity and the threshold constraint are modelled as relations, respectively in Listing 10 and Listing 11.

Listing 10. `Coordinate_Velocity_Point_Frame_Meter_Data` instance

```
{ Coordinate_Velocity_Point_Frame_Meter_Data:
  { {
      relation: Velocity },
    {
      of: { Point: PaPnt0 } },
    {
      as_seen_by: { Frame: Frame_Pa } },
    { velocity_reference_point: as_seen_by_frame_origin },
    {
      coordinates: [ { linear_velocity: [
          {PA.frame.u: 0.5},
          {PA.frame.v: 1},
          {PA.frame.r: 0}]]}],
    {
      units: meter, seconds },
    {
      ID: Linear-Velocity-0000000001 },
    {
      MID: { Point, Euclidean_Space, Frame, QUDT } }
  }
}
```

Consider an entity `aVel` conform to the model in Listing 10, then the threshold constraint model can be defined as follows:

Listing 11. `Iwt_Hydrodynamic_Constraint_Entity_Velocity_Data` instance

```
{ Iwt_Hydrodynamic_Constraint_Entity_Velocity_Data:
  { {
      relation: Constraint },
    {
      of: { Entity: aIwt_Hydrodynamic_3DOF_States_Forces_Coef}},
    { with_respect_to: { Coordinate_Velocity_Point_Frame_Meter: aVel} },
    {
      on: { Hydro_Equation_Manoeuvring_F.Damping: aDamping },
    {
      condition: {{ Condition.Threshold: {
          { threshold: 0.5 },
          { below_threshold: {
              aDamping.type: linear} },
          { above_threshold: {
              aDamping.type: linear+nonlinear} } }},
        { with_respect_to: aVel.coordinates.linear_velocity.u},
      }},
    {
      ID: Constraint-Velocity-Damping-ID },
    {
      MID: { Entity, Condition, Hydro_Equation_Manoeuvring_F } }
  }
}
```

The hydrodynamic constraint model listed in Listing 11 provides sufficient information to switch programatically between linear and linear+non-linear damping. Note that a similar constraint is included for velocity in the v-direction, and a third constraint relation between both of these to determine the damping outcome unambiguously. Many other constraint relations can be added to a hydrodynamical model (e.g., to its coefficients), to support specific behaviours of or tasks performed by a vessel. A limited set of such constraints is illustrated in the experiments in Section 3.3.

A different geometry–motion relation used for the ship domains of Section 3.3.1, related to the hydrodynamic behaviour of the vessel, consists of deacceleration-related (third-order polynomial) coefficients, both to model (i) natural deacceleration, i.e., the distance travelled by the vessel when no longer actuating (natural speed decay), and (ii) aided deacceleration, i.e., the distance travelled by countering motion through reverse actuation commands for maximum braking. Assuming the symbolic model, `Iwt_Hydrodynamic_Entity_Deacceleration_Coef` is already defined, as part-of a `Iwt_Vessel_Name_Mmsi_Cemt` entity, the corresponding data structure, as an instance-of this symbolic formalism, then becomes:

Listing 12. `Iwt_Hydrodynamic_Entity_Deacceleration_Coef_Data` instance

```
{ Iwt_Hydrodynamic_Entity_Deacceleration_Coef_Data :
  { longitudinal: {
    { natural: [-0.07143, 0.6624, -0.003657, 5.333e-06] },
    { aided: [-0.008571, -0.002714, 0.001097, -4.8e-06] },
  },
  transversal: {
    { natural: [0.02771, 0.06048, -0.0003154, 1.707e-06] },
    { aided: [-0.001714, -0.00261, 0.0001714, -8.533e-07] },
  },
  { ID: Deacceleration-data-000000001 },
  { MID: { IWT }}
}
```

Note that the `Iwt_Hydrodynamic_Entity_Deacceleration_Coef` model contains all the necessary information, including appropriate meta models, to correctly interpret the data structure.

3.1.4 Actuation

Actuation, and the ability to reason about a vessel’s actuation system, is essential for (remote) vessel operators, as for control software, to safely and effectively navigate a vessel. It can provide a minimal basis for mapping control inputs from joysticks in remote control centres to actuation commands of the vessel, and for mapping actuation commands to forces in the hydrodynamical model. Moreover, monitoring services should be able to identify, and potentially anticipate on, (electro-)mechanical failures as accurately as possible, especially when a vessel faces a handicap in performing its tasks.

Here too the assumption is made that a model `Iwt_Actuation_Entity_Bow_Stern`, with a conform entity as a part-of a `Iwt_Vessel_Name_Mmsi_Cemt` already exists, containing as such all necessary metadata for unambiguously interpreting the data structure. For example, a specific (constraint) relations exists between the dimensions of the actuation system and the vessel geometry defined earlier. This data structure then becomes:

Listing 13. `Iwt_Actuation_Entity_Bow_Stern_Data` instance

```
{ Iwt_Actuation_Entity_Bow_Stern_Data :
  { { bow: {
```

```

        { type: steeringJet },
        { nr_of_thrusters: 1 },
        { angle_limits_deg: [-180, 180] },
        { rpm_limits: [0, 2700] },
        { dimensions: {
            u_dist_to_bow_drive : 1.34
        }
        }
    }},
    {
        stern: {
            { type:fourchannelthruster },
            { nr_of_thrusters: 1 },
            { angle_limits_deg: [-180, 180] },
            { rpm_limits: [0, 1700] },
            { dimensions: {
                u_dist_to_stern_drive :-1.90
            }
            }
        }
    },
    {
        ID: Actuation-System-0000000001 },
    {
        MID: { IWT }}
}

```

Note that other information, for instance on the correct interpretation of the lookup-table for mapping drive system input commands to propulsion forces, can also be included as a part-of the actuation system model.

3.1.5 Sensors

Similarly to the actuation subsystem, the sensor subsystem also strongly relates to control and decision making, but from an information source point of view. In the following, explicit relations with ship domains, and the semantic map are introduced, based on sensor information.

As introduced earlier, a distinction is made between the following subsystems:

- Proprio-ceptive sensors: sensors to obtain information related to the vessel's own body model, e.g., GNSS, IMU, etc.
- Extero-ceptive sensors: sensors related to the vessel's perception, and thus related to extending world models with objects/entities/actors in the vessel's environment, e.g., LiDAR, cameras, ultrasound distance sensors, etc.
- Carto-ceptive sensors: maps that are available to the vessel, also related to extending the vessel's world model with objects/entities/actors in the vessel's environment, that are often not directly perceivable by the robot's extero-ceptive sensors, or are difficult to perceive.

For navigation, vessels typically use information from either a map, or from their perception sensors, as part of their world model to perform specific tasks. However, in order to use both of them together, switch between them as driven by situations and context, or in order to validate one another, additional (meta) information about the data is crucial. Detecting known map-landmarks in the perception sensor data, or vice versa, is only possible if these landmarks are unambiguously identifiable, and thus have appropriate semantic tags.

A complete set of models for the sensor subsystems is beyond the scope of this work, however, current information used for the experiments in Section 3.3, are interpreted according to the model in Listing 14, which obviously is an instance-of `aIwt-Vessel-Name_Mmsi-Cemt`. Also note that

further decoupling of this model might be desired, however, this was not necessary for the experiments in Section 3.3.3.

Listing 14. Iwt_Sensor_Proprio_Extero_Carto model

```
{ Iwt_Sensor_Proprio_Extero_Carto:
{
{ proprioceptive: { imu: {
{ resolution: { Sensor.resolution: aResolution } },
{ accuracy: { Sensor.accuracy: aAccuracy } },
{ ... } },
},
gnss: {
{ resolution: { Sensor.resolution : bResolution } },
{ accuracy: { Sensor.accuracy: bAccuracy } },
{ lon_std_dev: { Sensor.StdDev: bStdDev_Lon } },
{ lat_std_dev: { Sensor.StdDev: bStdDev_Lat } },
{ hd_std_dev: { Sensor: StdDev: bStdDev_Alt } },
{ has_rtk: true },
{ std_dev_rtk: { Sensor: StdDev: bStdDev_Rtk } },
{ ... } },
{ ... } },
},
{ exteroceptive: {
lidar : {
{ accuracy: { Sensor.accuracy: cAccuracy } },
{ range: { Sensor.range: cRange } },
{ ... } },
},
{ ... } },
},
cartoceptive: { [Semantic_Map: MapA, SemanticMap: MapB, ...] } }
{
ID: Sensor-System-ID },
{
MID: { IWT, Sensor, Wind_Sensor, Semantic_Map } }
}
}
```

The cartoceptive value here is a set of semantic maps. The map discussed in Section 3.2 could be one of them.

3.2 Semantic External World Model or Map Model

3.2.1 Map initialisation

As stated in Section 2.3, local tangent plane coordinates (ENU) are used as a geographic reference system for the 2D maps presented in this work. A local map will be generated at runtime, on a specific timestamp, based on a specific situation, by some entity. Note that in the context of this paper, maps are generated by the vessel entity. The body-fixed origin o_b of the vessel, coinciding with a Point on the vessel that is tangent to the waterline, is used as origin of the local map. Assuming the Point `EnuPnt0` is defined, we get:

Listing 15. Iwt_Map_Entity_Point_Time model

```
{ Iwt_Map_Entity_Point_Time:
{ { generate_by: { Entity: aIwt_Vessel } },
{ with_respect_to: { Point: PaPnt0 } },
{ at_time: { Time: aTime } },
{ origin: { Point: EnuPnt0 } },
{ ID: Semantic-Map-ID },
}
```

```
{
  MID: { IWT, Entity, Time, Point  }}
}
```

Moreover, assume a defined reference frame model `Geodetic_Frame_Enu`, as a composition of the points `EnuPnt0`, `EnuPntX`, `EnuPntY`, and `EnuPntZ`. Then, the map entity conforming to `Iwt_Map_Entity_Point_Time` has a `Geodetic_Frame_Enu` entity. The coordinate data structure for the origin `EnuPnt0` is shown in Listing 16.

Listing 16. `Coordinate_Point_Entity_Frame_Enu_Data` instance

```
{ Coordinate_Point_Entity_Frame_Enu_Data:
  { { relation: Position },
    { of: { Point: EnuPnt0 } },
    { with_respect_to: { Entity: aIwt_Map_Entity_Point_Time } },
    { as_seen_by: { Frame: Geodetic_Frame_Enu } },
    { coordinates: [ {Geodetic_Frame_Enu.origin.lon: 4.706794},
                     {Geodetic_Frame_Enu.origin.lat: 50.900742} ,
                     {Geodetic_Frame_Enu.origin.alt: 16} ],
      units: { [decimal degrees, decimal degrees, meter] } },
    { ID: Coordinate-EnuPnt0-000000001 },
    { MID: { Point, Frame, Entity, QUDT, EPSG, WGS84 } }
  }
}
```

Correct interpretation of this origin `Point` is absolutely critical, and has several additional geometry relations with vessel entities. When the map is shared between such entities, or with remote control centres, a necessary set of meta data allows for correct interpretations and model-to-model transformations, as every entity or service can have their own sets of conventions and compositions.

The conversion from geographic features, containing geodetic coordinates in the EPSG:4326 reference system, to local ENU coordinates, is a two stage process, involving (i) to convert geodetic coordinates to ECEF coordinates, and (ii) to convert ECEF coordinates to local ENU coordinates. The first step (i) is performed by using the following equations, with latitude ϕ , longitude λ , and height h :

$$X = (N(\phi) + h) \cos \phi \cos \lambda \quad (5)$$

$$Y = (N(\phi) + h) \cos \phi \sin \lambda \quad (6)$$

$$Z = \left(\frac{b^2}{a^2} N(\phi) + h \right) \sin \phi \quad (7)$$

where

$$N(\phi) = \frac{a}{\sqrt{1 - e^2 \sin^2 \phi}}, \quad (8)$$

and a and b are the equatorial radius semi-major axis and the polar radius semi-minor axis, respectively. Also note that here $e^2 = 1 - \frac{b^2}{a^2}$ is the square of the first numerical eccentricity of the ellipsoid. The prime vertical radius of curvature, $N(\phi)$, is the distance from the surface to the Z-axis along the ellipsoid normal. For the second step (ii), given a local reference point $\{X_r, Y_r, Z_r\}$, and an object at $\{X_p, Y_p, Z_p\}$, then

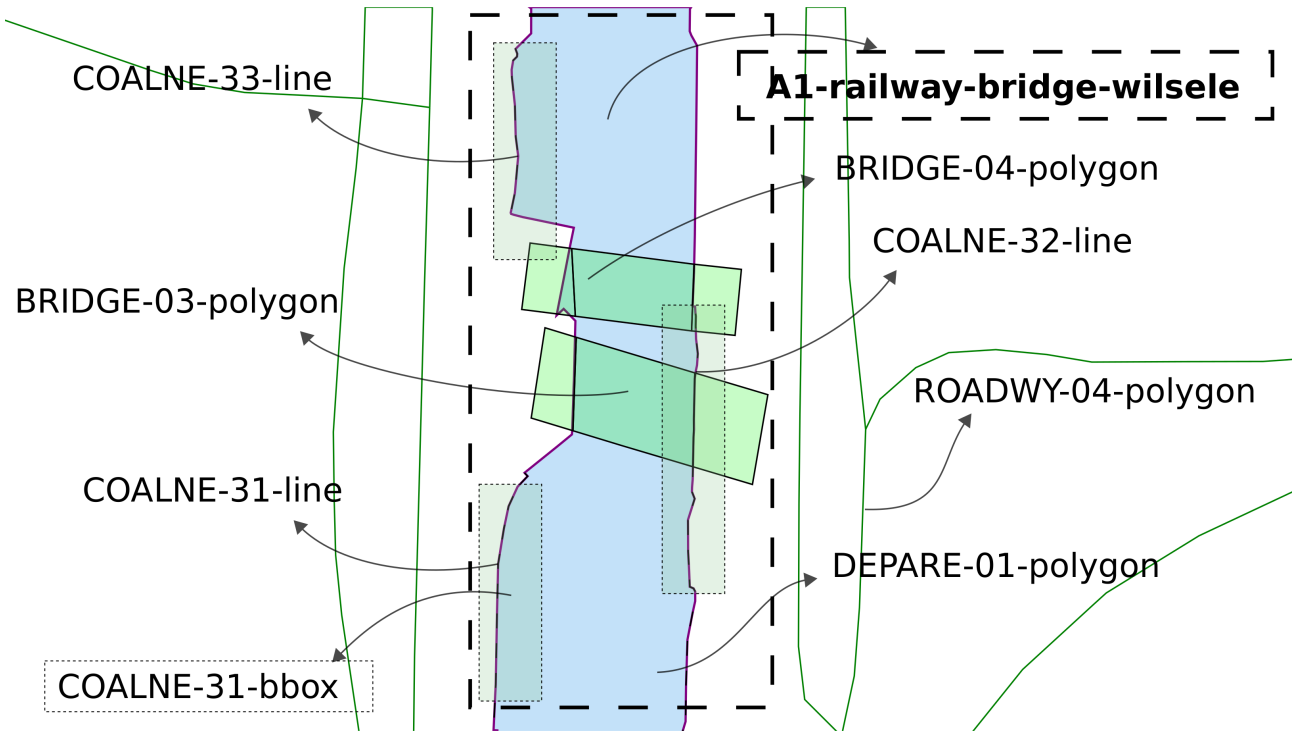


Figure 4. Part of local map from Figure 2(b) with `Symbolic-IDs` and additional metadata

the vector pointing from the reference point to the object in the ENU frame is:

$$\begin{bmatrix} x \\ y \\ z \end{bmatrix} = \begin{bmatrix} -\sin \lambda_r & \cos \lambda_r & 0 \\ -\sin \phi_r \cos \lambda_r & -\sin \phi_r \sin \lambda_r & \cos \phi_r \\ \cos \phi_r \cos \lambda_r & \cos \phi_r \sin \lambda_r & \sin \phi_r \end{bmatrix} \begin{bmatrix} X_p - X_r \\ Y_p - Y_r \\ Z_p - Z_r \end{bmatrix} \quad (9)$$

The envelope of the local map can be determined by the user, the situation, or by the application.

At the timestamp the map is generated, additional metadata is added to the features fetched from external sources, which allows for more efficient querying, sharing, and context negotiation at runtime. An example is illustrated in Figure 4. In that example, the following semantic tags are allocated:

- `navbounds`: symbolic tag allocated to (I)ENC features that represent navigation boundaries, here corresponding to COALNE and DEPARE features.
- `enc-feature-X`: relation with corresponding (I)ENC feature, also connecting the already existing tags such as object names (`OBJNAM`), general feature info (`INFORM`), and information about the visibility of objects to a certain context. For instance, the `CONRAD` attribute, which provides information on the conspicuousness of the feature for radars, e.g., whether this returns a strong radar echo. Note that this can then be connected with the model of the sensor subsystem, as given in Listing 14.

Furthermore, the following geometries and corresponding relations are defined:

- `A1`: sub-area in the map containing all features within a certain range (property) of `BRIDGE-04`, that is, the railway bridge around the research area in Leuven, Belgium. Similary, this is done for locks, terminal, among any other critical regions. Note that these areas are computed at the initialisation of a map, using (geo)spatial computations on the features inside the global map.

- `FEATURE-NR-bbox`: bounding-box of a feature in the map, which can be used, for example, to model constraint relations like `Intersections`.

Furthermore, a set of attributes is given to all features. For example, `number_of_points`, or `feature_type`, as well as the set of local coordinates. The number in the feature IDs is also a property of each feature, and the number sequence is related to a predefined meta-model.

It should be noted that multiple maps be generated, depending on timestamp and/or reference entity, which can be related to one another.

3.2.2 Ship position on the map

A coordinate model for `Position` of the vessel as a relation between the `Point` geometry `PaPnt0-ID` (body-fixed origin of vessel) and the `Geodetic_Frame_Enu` (Frame geometry) of the local map, is constructed as follows:

Listing 17. `Coordinate_Point_Entity_Frame_Meter` data instance

```
{ Coordinate_Point_Entity_Frame_Meter:
  { { relation: Position },
    { of: { Point: PaPnt0 } },
    { with_respect_to: { Entity: Iwt_Map_Local_Geodetic } },
    { as_seen_by: { Frame: Geodetic_Frame_Enu } },
    { coordinates: [ {Geodetic_Frame_Enu.n: 10.2},
                     {Geodetic_Frame_Enu.e: 2.415} ,
                     {Geodetic_Frame_Enu.u: 0} ],
      units: meter },
    { ID: Coordinate-Enu-Vessel-0000000001 },
    { MID: { Point, Frame, Entity, QUDT, E2 } }
  }
}
```

The position $[0, 0]$ of the vessel in the local ENU reference system, is illustrated in Figure 5.

Similar to the ship `Position` relation model above, models for velocity, acceleration, etc., can be constructed. Generally speaking, motion has three parts: the `Position` relation, and the relations of `Velocity` and `Acceleration` that represent the first- and second-order derivatives in time of the `Position` relation. Because of this relation model, the same geometric entity can have several `Positions` and `Motions` at the same time: one for each other entity involved in a `Position` or `Motion` relation, and thus in this case, relative to a specific feature entity in the semantic map.

Furthermore, the top view `Projection` of the vessel hull is used in the map, as seen in Listing 8, with the following two constraint relations:

- `{Line_segment: [PaPnt0-ID, PaPntU-ID]}` is Parallel to `{Line_segment: [EnuPnt0-ID, EnuPntY-ID]}`
- `{Line_segment: [PaPnt0-ID, PaPntV-ID]}` is Parallel to `{Line_segment: [EnuPnt0-ID, EnuPntX-ID]}`.

3.3 Semantic Dynamic Models for IWT

This work uses ship domains (SD) and map domains (MD) to illustrate relations that are relevant within a situation. The adjective *dynamic* denotes the ability to update these sets of model-conform entities and relations at runtime. A modelling approach for these domains is briefly discussed in Section 3.3.1 and Section 3.3.2. Subsequently, these models are used in the range of experiments of Section 3.3.3, where

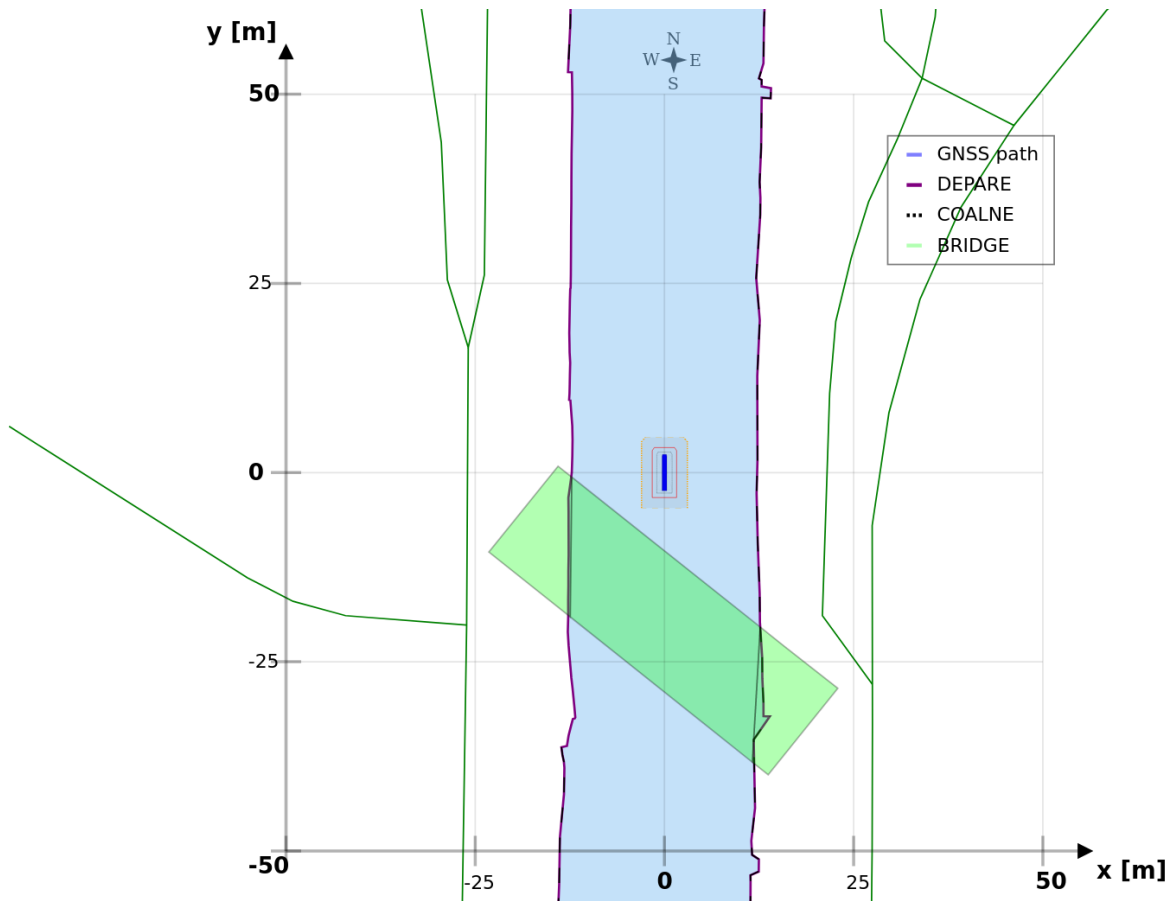


Figure 5. Vessel position in local ENU frame

situations are considered that require dynamic behaviour. Note that corresponding results are covered in Section 4.

3.3.1 Ship domains (SD)

Dynamic, context-dependent ship domains have relations with the body model of the vessel, and with the semantic map. These SDs are the main focus throughout the experiments in Section 3.3.3, as they allow for situational-aware reacting of the application, and subsequent visualisation, based on the integration of the internal and external world models. The ship domain geometries contain relations with (a combination of) the Motion, Task, Perception, and Map of the robot.

In the recently finished hull-to-hull (H2H) project, experiments were conducted with the explicit use of uncertainty and proximity vessel zones as a navigational aid for remote operators SINTEF (2020); Kotzé et al. (2019). In accordance to this project, this work adopts a similar three-level domain taxonomy, and subsequently focusses on the composability of the SDs, based on earlier defined relations. The three domains, illustrated in figure 6, are defined as follows:

- **SD0** (“...”, black dotted line): uncertainty zone, discussed in E_1 .
- **SD1** (“—”, red line): sometimes referred to as the danger zone, as it is typically related to the required breaking distance (Motion) of the vessel, as seen in E_2 – E_5 .




Figure 6. Example configuration of vessel ship domains.

- **SD2** (“- -”, orange dashed line): the geometry of this zone is highly dependent on the situation, and various representations or paramterisations exist depending on its (set of) relation(s), illustrated in E_2 – E_7

The authors of this work advocate for a vessel to at least have one, fundamental, axiomatic, ship domain “SD0” as part of its world model, which connects the vessel with the map, taking into account the knowledge of the uncertainty of the position associated with the symbolic connection point, and the orientation of the vessel. This information is considered essential to enable higher levels of autonomy. Moreover, two additional zones (“SD1” and “SD2”) make sense from the perspective of a human interpreter, however, as discussed before, a vessel can interpret several domain compositions and relations simultaneously. As such, more (sets of) ship domains can be added at all times, given they have semantic relations that allow for unambiguous interpretation of these domains.

Consider the mereo-logical models of these three ship domains, and their conforming entities defined as: SD0, SD1, and SD2. Next, the geometries of these ship domains and their relations need to be defined. For instance, for SD0, this can be a two-dimensional affine transformation of the top view hull geometry entity. A model for this **SD0** is shown in Listing 18:

Listing 18. Iwt_Ship_Domain_A2_Scale_Rotate_Skew_Translate model

```
{ Iwt_Ship_Domain_A2_Scale_Rotate_Skew_Translate:
  {
    {
      geometry: Iwt_Hull_Geometry_2D_TopView.geometry ,
      transform_origin: { Point: PaPnt0 },
      {
        order: { [{Scale: s},{Rotate: r},{Skew: sk},{Translate:t}]} },
      {
        scale: { Scale: [s.x, s.y] },
      {
        rotate: { Rotate: r.z },
      {
        skew: { Skew: [sk.x, sk.y] },
      {
        translate: { Translate: [t.x, t.y] },
      {
        units: [none, radians, radians, meter]
      {
        ID: SD0-A2-ID },
      {
        MID: { Iwt, A2, Scale, Rotate, Translate, Skew, Point }}
    }
  }
}
```

Several additional relations and constraints between aShip_Domain_A2 entity and other entities can be added. For example, the scale factors in Ship_Domain_A2 can be determined by the uncertainties of the proprioceptive sensor subsystem in Listing 14 (SD0). The models to apply at a certain point in time, given a specific situation, will be determined by the relations of the domains and corresponding constraints. Another example is to connect ship domain geometry with the de-acceleration motion model in Listing 12, or any other motion relation, as discussed in experiment E_2 for SD1 and SD2.








3.3.2 Map domains (MD)

Currently, only two map domains are explicitly defined. These are:

- **MD0**: geometries, or collections of geometries, that form the static backbone of the map, i.e. the basemap. These are typically composed from external chart datasets, and generated during the map initialisation process, discussed in Section 3.2.1.
- **MD1**: all geometric entities that are dynamically added to the map at runtime, for example, the vessel and its ship domains belong to this level. These entities can contain relations with entities in MD0, and can moreover be divided into sub-domains, such as perception, navigation, control, other actors, map feature updates, and others. Generating this taxonomy is beyond the scope of this work.

3.3.3 Experimental design

Table 1. Overview experiments, with reference to corresponding results.

	description	main relation(s)/feature(s)	result	e.g.
E_1	Introduction zeroth level domains for ship, SD0 , and map, MD0 .	The uncertainty of the vessel position and its orientation determine the size of SD0 ; its shape is based on the vessel geometry.	4.1	
E_2	Introduction of first, SD1 , and second, SD2 , level ship domains.	The size of SD1 corresponds to the minimally feasible breaking distance for the vessel, and its shape relates to the geometry of SD0 . Similarly, SD2 corresponds to the minimal speed decay distance	4.2	
E_3	Tolerances for SD1 and SD2 based on the hydrodynamic model.	A predetermined tolerance factor scales the size of SD1 and SD2 based on whether or not the available hydrodynamic model of the vessel incorporates external forces (e.g. wind in this case).	4.3	
E_4	The declaration of SD2 as an anticipation zone.	The shape of SD2 will follow the navigational bounds of MD0 , with a corresponding horizon configured by the user/operator.	4.4	
E_5	Dynamic shortest-distance point features in MD1 .	Temporary features are added to MD1 indicating the shortest linear distance between SD0 and a point from MD0 that has the <code>navbounds</code> meta tag.	4.5	
E_6	The lane switch primitive added to MD1 .	A lane geometry is added to MD1 , based on a set of relations between (i) the vessel entity, (ii) its ship domains, (iii) the COLREG meta model (avoiding collision in head-on situation), and (iv) the map domains.	4.6	
E_7	Composability – integrated experiment combining several relations together.	All the relations corresponding to previous experiments hold here as well, and are extended with a relation between the communication subsystem and SD2 .	4.7	

It should be noted that a set of relations between the geometry of the ship domains and the current situation can coexist, however, these experiments aim to illustrate (and thus visualise) the “main relation” in a specific situation, that is, the relation that influences the domain geometry the most (at a certain point in time).

3.3.3.1 Experiment 1: the axiomatic body–map model interaction

Context: A basic assumption for situational awareness in IWT, is a need for knowing a vessel’s pose within the physical world. Figure 2 visualises this basic interaction between the body and world models. The physical world there is always an uncertainty associated with the pose of a vessel, as well as an accuracy of the local map. Furthermore note that pose uncertainty depends on accuracy and tolerances of proprioceptive sensors, possibly improved via exteroceptive sensors (see Figure. 1c).

Relations: This experiment declares the **SD0** via a geometry–geometry relationship. More precisely, the uncertainty of the vessel position and its orientation, provided by proprioceptive sensors, determine the size of **SD0** whereas its shape is based on the vessel geometry. The present IENCs have no explicit accuracy information available, hence **MD0** will be declared without uncertainty.

Configuration:

- Causal connection in visualisation of **SD0**: when the heading accuracy drives the width or length of the uncertainty zone, i.e., its size, an additional transparent vessel geometry rotated clockwise and counter-clockwise is plotted, in order to indicate that the vessel orientation causes the width of the ship domain. When the position accuracy determines the size of the domain, these additional rotated vessel geometries are not shown.
- The position for this ship domain in the map corresponds to Listing 17, with the shape according to Listing 18.
- To illustrate this causal link between the uncertainty source and the visualisation of **SD0**, the uncertainties in position and heading ($\epsilon_\nu = [\epsilon_x, \epsilon_y, \epsilon_\theta]$), change in the first 40 seconds of the simulation (see Section 4.1), as follows:

```
{ {uT0 (t=0): [0.3, 0.3, 0.3] },
  {uT1 (t=5): [0.2, 0.2, 0.2] },
  {uT2 (t=10): [0.2, 0.2, 0.15] },
  {uT3 (t=20): [0.2, 0.2, 0.12] },
  {uT4 (t=25): [0.2, 0.2, 0.09] },
  {uT5 (t=30): [0.2, 0.2, 0.05] } }
```

3.3.3.2 Experiment 2: a navigation aid for (remote) operators and control systems

Context: The braking distance of a vessel, or its natural speed-decay distance, with corresponding polynomial coefficients in Listing 12, is crucial for a motion control system, or for a monitoring or controlling (onboard or remote) officer.

Relations: This experiments declares the **SD1** and **SD2** via a geometry–motion relation. More precisely, the size of **SD1** corresponds to the minimally feasible breaking distance for the vessel, whereas its shape relates to the geometry of **SD0**. Similarly, **SD2** corresponds to the minimal speed decay distance.

Configuration:

- Tolerance (in longitudinal and transversal direction), can be context-dependent on its own.

- Experimentally obtained third-order polynomials, with velocity as variable (using coefficients in Listing 12).
- Static reverse-motion tolerance, in addition to the pose uncertainty, in longitudinal and transversal direction. This small margin increases safety for motion-based decisions making.

3.3.3.3 Experiment 3: hydrodynamic model composition and constraints

Context: Humans and robots should be able to unambiguously interpret the composition of the hydrodynamic model—and its constraints or assumptions—to operate and control the vessel, and to assign tolerances to specific control tasks accordingly, wherever needed. For example, especially for smaller vessels, such as *the Cogge*, it is generally important to account for wind whenever possible, and to *know* about whether or not wind is taken into account in the planned trajectories and short-term motion predictions of nearby vessels. If it is not, either by exclusion in the model, or by lack of an appropriate wind sensor, every system can decide for itself *how* to account for this shortcoming in the model.

Relations: This experiment adds tolerances to **SD1** and **SD2** via a main geometry–motion relation. More precisely, when the hydrodynamic model of a vessel lacks the integration of wind forces, a predetermined tolerance factor scales the size of **SD1** and **SD2**. The semantic hydrodynamic model in Listing 9, has the `external_forces` property which includes the information of whether or not external forces, such as the wind forces, are included into its hydrodynamic model. This moreover imposes the constraint that the sensor subsystem has-a `Iwt_Sensor_Wind` entity.

Configuration:

- The tolerances can be dynamically activated, however, in this particular experiment, a human selects or deselect the checkbox, depending on whether external wind forces are included in the hydrodynamic model of the vessel or not (see Section 4.3).
- The determination of tolerances on the geometry of the vessel, more specifically, its surface above the waterline. The surface dimensions are factored with the static tolerance of the ship domains⁸.
- It should be noted that not only wind induces tolerance adjustments on the ship domains, however, for the purpose of *this* experiment, it is the only affecting parameter.

3.3.3.4 Experiment 4: cartoceptive anticipation domain

Context: Within the perception context, it can be useful to define explicit relations between a ship domain and other features in the semantic map. Such a ship domain could represent an area of interest for the vessel or operator. For example, this domain can be defined as an anticipation zone in which obstacles should be detected (within the navigation bounds of the map), to be used by the control system or operator.

Relations: This experiment declares **SD2** via a main geometry–geometry relation. More precisely, the shape of **SD2** will follow the navigational bounds of **MD0**, and its size, or rather horizon, can be configured by the operator or the vessel.

Configuration:

- This experiment fetches all features that: (i) have the semantic tag (metadata) `navbounds` in the map, i.e., features related to the navigation bounds for the vessel, and (ii) are within distance U from the vessel, with distance U in the direction `Vessel_PrincipalAxes_Frame.frame.u`.

⁸ The experiments in this work respectively use scaling factors corresponding to the vessel's surface geometries above the waterline, i.e., $1.12 (1+h_{v,aw} \times l_v)$ in the longitudinal direction, and $1.96 (1+h_{v,aw} \times w_v)$ in the and transversal direction.

- This distance U is determined by the vessel, or operator, at runtime, and can be context-dependent on itself.
- A distance of 50 meter in the sailing direction, and 20 meter in the reverse direction is used.
- The resulting **SD2** domain is a `Polygon` composed from `Points` that belong to these `navbounds` features and fall within the range constraints of **SD2**.

3.3.3.5 Experiment 5: shortest distance between uncertainty zone and navigation boundary

Context: Knowledge of the distance between the vessel and an object, e.g., the shoreline, can augment situation awareness of the operator and/or the control systems.

Relations: This experiment adds temporary features to **MD1**—which indicate this shortest distance—via a main geometry–geometry relation. More precisely, a calculation determines the closest linear distance between **SD0** and a point from **MD0**, that is, a coordinate of a feature that has the semantic `navbounds` tag. As **MD0** features are currently not composed of symbolic, uniquely identifiable points, a temporary clone with the same coordinates is composed, and *does* get assigned a semantic tag. As such, this `Point` entity, i.e., `aPntShortestDistNavbounds`, can be used for online reasoning. For the experiments in this work, that means to determine whether `aPntShortestDistNavbounds` lies *within* **SD1** or **SD2**. This implies computing the `Intersection` between $\{\mathbf{SD0}, \mathbf{SD1}, \mathbf{SD2}\}$ and `aPntShortestDistNavbounds`.

Configuration:

- As discussed in Section 2.1, semantic metadata is only added to each map feature (e.g., `LineString`, `Polygon`, ...) and not to each individual geometric map point. For example, the ENC COALNE features in the example map typically contain a `LineString` of 5–15 points, over a distance of 10–20 meter.
- It should be noted that the associated `navbounds` are not yet treated as lines or polygons, but rather as the just-mentioned set of discrete points during the presently implemented shortest distance between **SD0**–**MD0** calculations.
- A temporary `Semantic_ID` is assigned to the `Point` that is part-of the `Polygon` geometry in Listing 8, and moreover holds the shortest distance relation with `aPntShortestDistNavbounds` in **MD0**.
- The following pictograms illustrate the result of the vessel–shoreline intersection calculation:
 - result: no intersection: point = circle, black
 - result: **SD2**: point = square, orange
 - result: **SD1**: point = triangle, red
- A list of 6 *past* shortest points are kept as “recent history”, however, this value is dynamically configurable.
- Note that, presently, intersections with **SD0** trigger the same warning as an intersection with **SD1**. This need not be the case, however, their differentiation falls out of the scope of the current experiment and work.

3.3.3.6 Experiment 6: the lane shift primitive for COLREGs

Context: COLREG Rule 14, head-on situation (a) states that: “when two power-driven vessels are meeting on reciprocal or nearly reciprocal courses so as to involve risk of collision, each shall alter her

course to starboard so that each shall pass on the port side of the other”. To safely comply to this, and to other COLREG rules, especially in a highly automated environment, additional knowledge can significantly reduce confusion, and enhance safe, automated decision making to avoid collisions.

Relations: This experiment declares a lane shift primitive, based on a set of relations between (i) the vessel entity, (ii) its ship domains, (iii) the COLREG meta model, and (iv) the map domains. The lane geometry, which is added to **MD1**, has a geometry–geometry relation with the `navbounds`-tagged entities in **MD0** (lane translation). A second geometry–geometry relations exists between **SD0** of the vessel entity, and the geometry of the lane. A third, geometry–perception relation is present, where knowledge about the perception subsystem determines the geometry of **SD2**. Furthermore, the relation geometry–task is present, i.e. that the vessel’s task is to follow the lane in this particular situation, with corresponding implications for the controller.

Configuration:

- By default, when no objects are within the perception range, the lane in **MD1** is centred in the channel, with a width $w_{lane} = w_{channel} / f$, where f is determined by the current situation, taking into account the relevant operational range (here 300 m). In this particular head-on case, $f = 3$.
- When a vessel’s **SD0** geometry is completely *within* the lane geometry, the lane has a “light green” colour. If not, the lane turns “red”. This visual confirmation can help (remote) operators to check whether they are in fact properly executing a task. The `is-within` relation offers similar knowledge for robots.
- Information about the exteroceptive sensor system, as modelled in Listing 14, helps determining an appropriate range for the circle geometry of **SD2**, in the geometry–perception context. The vessel velocity (see Listing 10) is also factored here. The perception range is divided into two sub-ranges, that is, a short range (0–50 metres), and a long range (50–150 metres). The LiDAR can detect movement and allows for a high-level classification of obstacles within the long range. At a relatively low forward speed ($< 1m/s$), it can properly identify obstacles and corresponding geometries within the short-range. The visualised circle radius (**SD2**) is set to the short range, as this range is connected to the task execution (*discrete* control) of the vessel (in this case the lane shift execution). Data processing and context-reasoning within this horizon can still adjust the range of ship domain **SD2** at runtime, i.e., the range that triggers the lane switch.
- When another vessel’s **SD0** geometry is *within* the perception-related zone **SD2**, a lane switch is triggered, associated with an affine transformation of the centre lane(s), taking into account (i) COLREG rule 14, and (ii) the width of the channel in **MD0**. This moreover triggers the controllers (of both vessels) to adjust their constraint values, in order to continue executing the “stay within the lane” task.
- It should be noted that several additional relations with considerable implications are *not* taken into account during in this experiment, such as:
 - compliance to other COLREG rules, with respect to the width of the channel, or type of the vessel; and
 - water depth information, as well as motion of the vessel, which can also have explicit (constraint) relations with the lane geometry.

3.3.3.7 Experiment 7: combination of previous experiments, with additional sensor-subsystem reasoning

Context: This experiment combines several of the above experiments. A vessel navigates a narrow channel, and passes two approaching vessels in opposite (head-on) directions. The first vessel *does* have AIS, and thus communicates its position to *the Cogge*, and the second vessel does not have AIS, meaning there is no way of knowing whether this second vessel is approaching without having a line of sight.

Relations: The abovementioned relations hold here as well. An additional relation between the Communication subsystem (AIS position of surrounding vessels), and the geometry of the cartoceptive **SD2** (own vessel), is added.

Configuration:

- By default, when no objects are within the short-range perception range (**SD2**), the lane in **MD1** is centred in the channel, similar to experiment paragraph 3.3.3.6. The same *within* relation applies here as well.
- Perception horizon of 50–150 metres is used to confirm movement of surrounding actors.
- When AIS position is communicated, the geometry–geometry relation between the cartoceptive ship domain **SD2** (similar to paragraph 3.3.3.4), and the AIS position and approaching vessel, triggers a lane switch is (AIS position is *within* the cartoceptive **SD2** geometry).
- When no AIS position is communicated, the geometry–perception related ship domain **SD2** (similar to paragraph 3.3.3.6), is used to trigger the lane switch.
- After passing a vessel, the geometry corresponding to the motion relation of **SD2** is used to trigger a “back-to-centre” lane switch, i.e., when the **SD0** domain geometry of the other vessel is *below* the **SD2** motion-based geometry. This, together with the geometry–geometry relation between **MD0** and the vessel geometry in **MD1**, in combination with the motion of the vessel, determines whether a lane switch is appropriate.

3.4 Implementation

Consider experiments 6 and 7, corresponding to the architecture in Figure 3, where a map is shared between two crossing vessels, serving a role as mediator by coordinating this head-on situation. Both vessels are able to interpret the models and relations that are used in the map composition. The shared map can be initialised by either one of the vessels, or by an external service. Furthermore, both vessels can have their own base map(s), and/or their own map domains on top of the (shared) map. It is also important to note that the visualisation is always relative: this paper visualises the data from the perspective of the *own-ship* entity, however, local coordinate transformations, corresponding to other perspectives, result in different visualisations of the exact same data structures. When *Vessel A* initialises the shared map, that is, offering the model-conform data structures in a particular situation, and *Vessel B* is familiar with these models, both entities can agree on the map as mediator for this situation. For this lane shift primitive, the model-conform data structures include: (i) the static navigation bounds (from the navigational charts), (ii) **SD0** of both vessels, (iii) and the lane geometries and associated relations, e.g., with the motion constraints of both vessels. When linked with the perception subsystem, this list can be extended with relations to dynamic obstacles and their geometries. The dynamically composed lane geometries and situation-specific policies⁹ can in turn be used as control constraints for the respective vessels to perform

⁹ Situation-specific policies include issuing a warning whenever a vessel’s **SD0** threatens to exceed the lane boundaries (+ tolerance). If no correction occurs, and the manoeuvre is still ongoing, termination of the manoeuvre is required, and some “safe fallback mode” could be enabled. As seen in Result 4.6, part of this policy is visualised on the map by changing the colour of the lanes.

COLREG-compliant, collision-free manoeuvres. The internal processing, integration in the controller, and general implementation, are completely up to the user, as long as all constraints are met. Such constraints can be imposed by a mediator, or by any of the relations, both internally and externally, relevant in a certain situation. The lane geometry and corresponding lane-shift procedure could be updated dynamically, for example, when the perception subsystem of *Vessel A* detects an obstacle¹⁰. Even if only *Vessel A* is able to detect such obstacles, these kind of events tend to have implications for both vessels, e.g., by updating the lane geometries in the shared map, at runtime. As long as the world models and relations are known by both actors, such discrete control decisions can be understood/explained, and justified.

Models are implemented using either flatbuffer schemas, or human-readable JSON-LD schemas (or both), depending on the application layer. The latter offers a suited modelling paradigm for semantic, linked data, as it introduces additional property types such as `@id` to assign a model ID, `@context` for meta model connections, and `@type` for meta model `conforms-to` relations. This makes it very much suited for composing the body model of a vessel. Regarding the semantic map, possibly composed from (a set of) flatbuffer and/or JSON-LD models, this work adopts the SVG-standard. This standard already offers a set of standardised primitives to define and compose geometric features. SVG elements can have a symbolic identifier (`id`), and (meta) model tags can be added to their `class`-list. Additionally, this approach offers a straightforward query interface for free (next to querying spatial features from a database, for example), directly *on* the shared map itself, using Javascript's built-in `querySelector` method in a situation-related scope in the Document Object Model (DOM) tree. The SVG can moreover be directly rendered, for instance, in a browser. For realtime exchange of model-conform data structures, flatbuffers are preferred considering their performance benefits, as they allow for compressed payloads and zero-copy deserialisation of the data. Moreover, these flatbuffers are defined using an interface description language that is compatible to the protocol buffer format (`.proto`). Naturally, many other data formats could be used as well.

3.4.1 Assumptions

All experiments are conducted using systems that are capable of interpreting a minimal number of data structures conform to the models discussed in this work. Currently, no validation service is implemented to check whether or not a system is actually compliant. On the application layer, a simple `boolean` (always `true` in our case) determines whether an actor can interpret the data associated with a certain model. This implies that non-compliant actors with respect to the semantic map are not allowed to dynamically add/update features to/on a *shared* map. Similar to a shared map, a realtime peer-to-peer stream of hydrodynamical data, perception data, or any other relevant piece of information for that matter, can be set up between actors, as long as appropriate (meta) model information is exchanged at the initial handshake to guarantee correct interpretation (again, always assumed `true` here).

Regarding shared updates, a `boolean` property is added to the meta data of a model-conform data structure. This allows actors that produce such data to indicate whether or not the data may be updated by other compliant actors in the same environment. A relevant example could be the geometry of the bounding box of a detected obstacle in a particular environment. Distributed data structure updates can be rather complex, and will require additional policies, models, and some kind of validation or voting system. This, however, is beyond the scope of this work, that aims to focus on the building blocks for such future developments. The same limitation holds for validation of uncertainties, i.e., **SD0**, of various

¹⁰ Object detection via the perception sensor subsystem is not simulated, hence, dynamic updates of the lane geometry are not part of the experiments discussed in this work.

objects, including vessels. This is closely related to the perception-subsystem of the vessel. Consequently, additional models within this very context are necessary.

4 RESULTS

The results of the above-designed experiments can be found in the supplementary material videos in Section 5.1. This section briefly shows a few core snapshots of each video to illustrate the results. An overview was provided in Table 1. These snapshots include (some of) the following features shown in figure 7. In Results 4.1–4.4, the main vessel entity is considered the mediator, as it determines its related

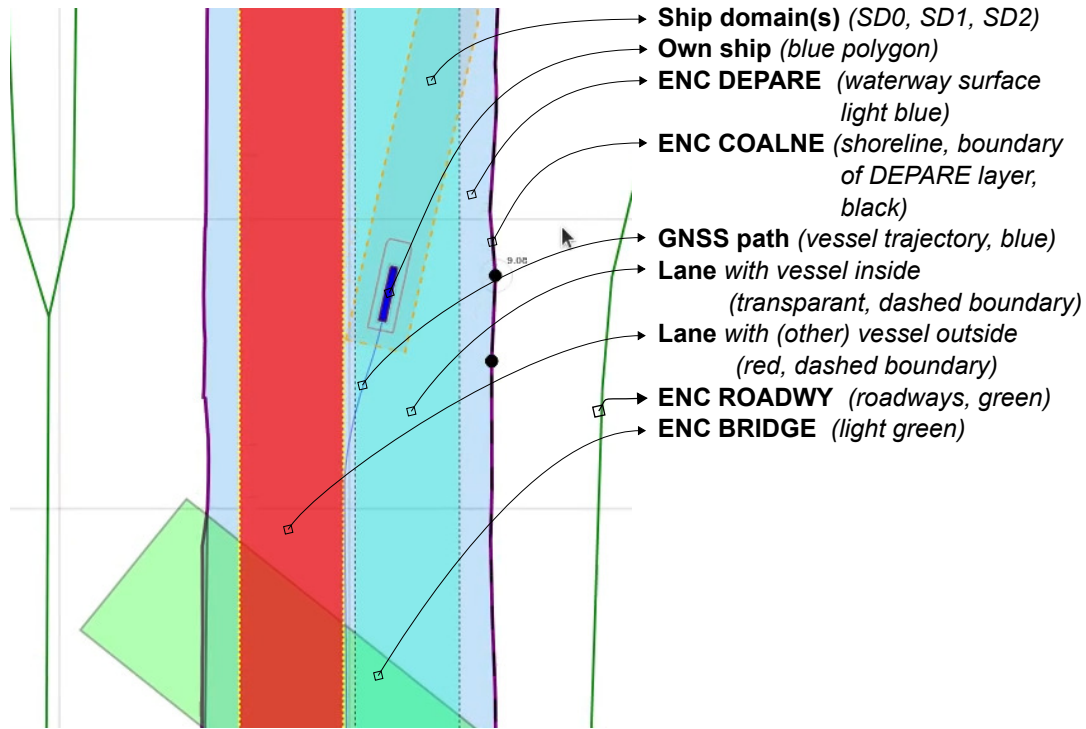


Figure 7. General legend for map features depicted throughout this paper.

ship domains according to information provided by its body-model subsystems. In Result 4.5, an additional higher-level mediator is introduced, i.e., an operator controlling the vessel in open loop, where relations between the body model and map are used, together with internal world model-based information, to determine appropriate actuation inputs. Lastly, in Results 4.6–4.7, the semantic map, which is shared between various actors, also takes on a role as mediator. The additional lanes are added to the map at runtime, and as such, the map determines control tasks and constraints for each actor.

4.1 Experiment 1

Figure 8 shows three snapshots of the Supplementary Video S1 which demonstrates the causal relation between the vessel’s pose uncertainty and its **SD0**.

4.2 Experiment 2

Figure 9 shows several snapshots of the Supplementary Video S2 which introduces **SD1** and **SD2** based on the hydrodynamic motion model of the vessel.

In this experiment, and in all subsequent experiments, the constraint in Listing 11 is applied to the hydrodynamic model. When the forward velocity of the vessel is below a certain threshold (0.5 m/s), the

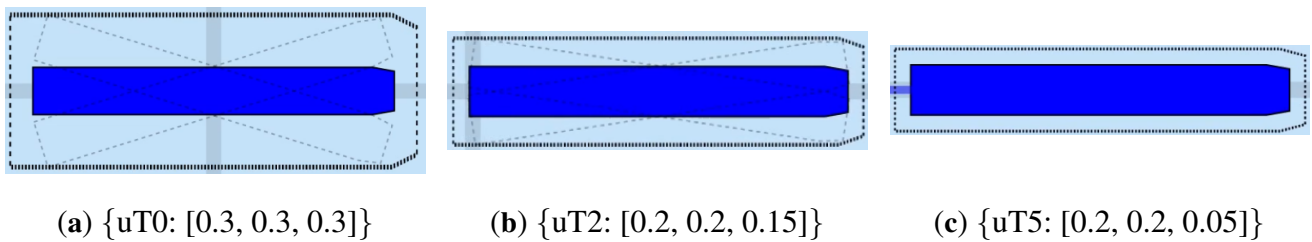


Figure 8. Dynamic behaviour of the axiomatic **SD0** for the different time steps and associated uncertainties.

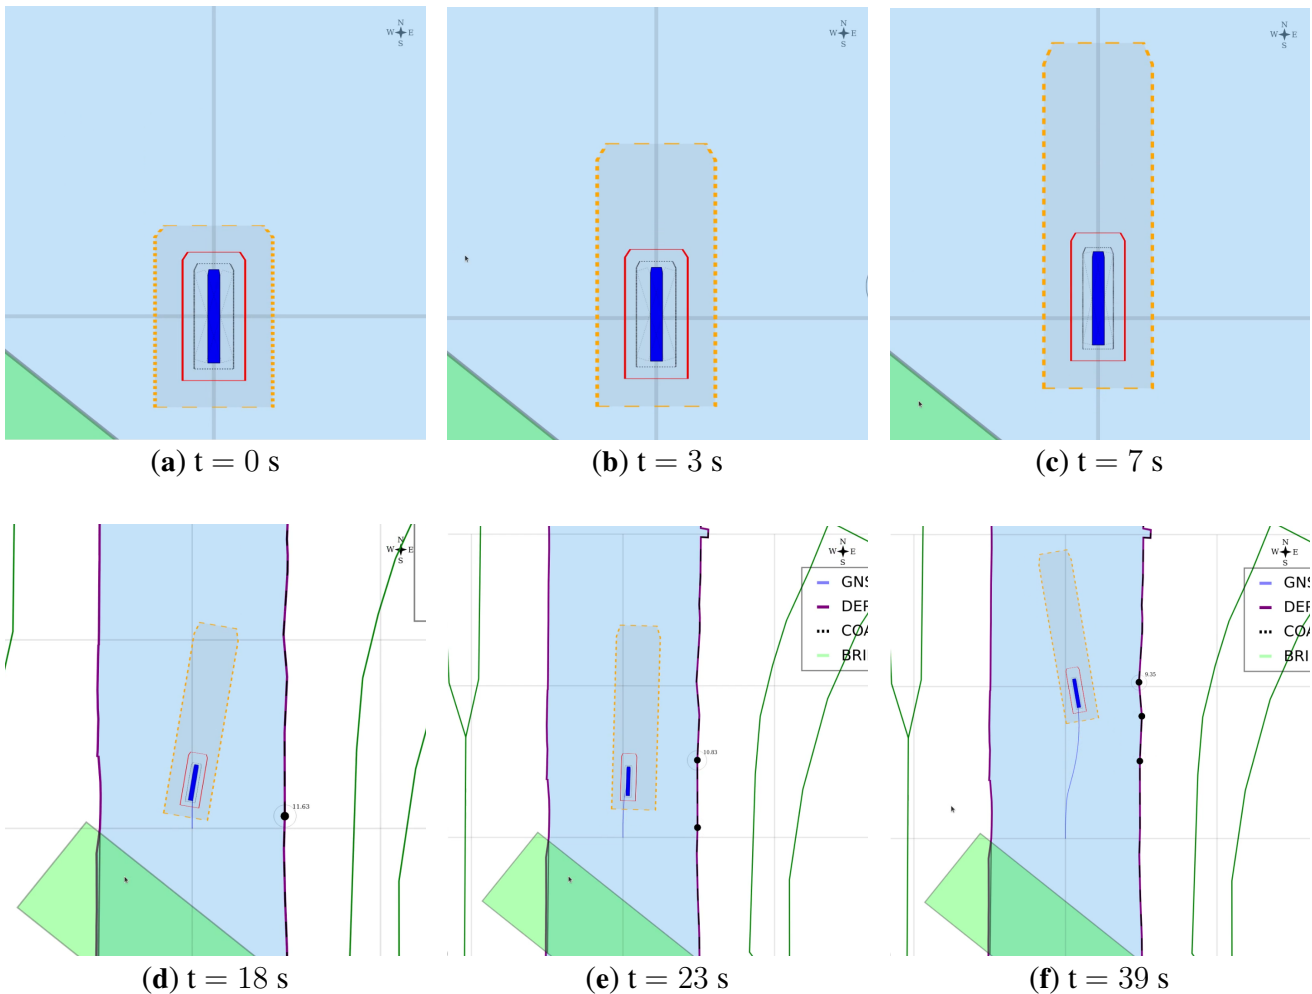


Figure 9. Dynamic behaviour of **SD1** and **SD2** based on the hydrodynamic motion model of the vessel.

damping is linear, whereas above, it is linear + non-linear. This is especially important when the vessel has to perform specific, complex, tasks at low speeds (docking, mooring). When the 3DOF model of Listing 9 is used inside the control loop (e.g., for model predictive control), at low speeds, the model is very sensitive to the non-linear damping matrix, and will not mimic the physical behaviour of the vessel. Similarly, when encountering one or multiple vessels in a canal, or at a terminal, a mediator needs to know whether the models used to execute the respective control tasks of systems involved are adjustable to the context and motion of the vessel. Not having this information could lead to unexpected behaviour.

4.3 Experiment 3

Figure 10 shows four snapshots of the Supplementary Video S3 which illustrates the effect of the incorporation of the external wind forces on **SD1** and **SD2**.

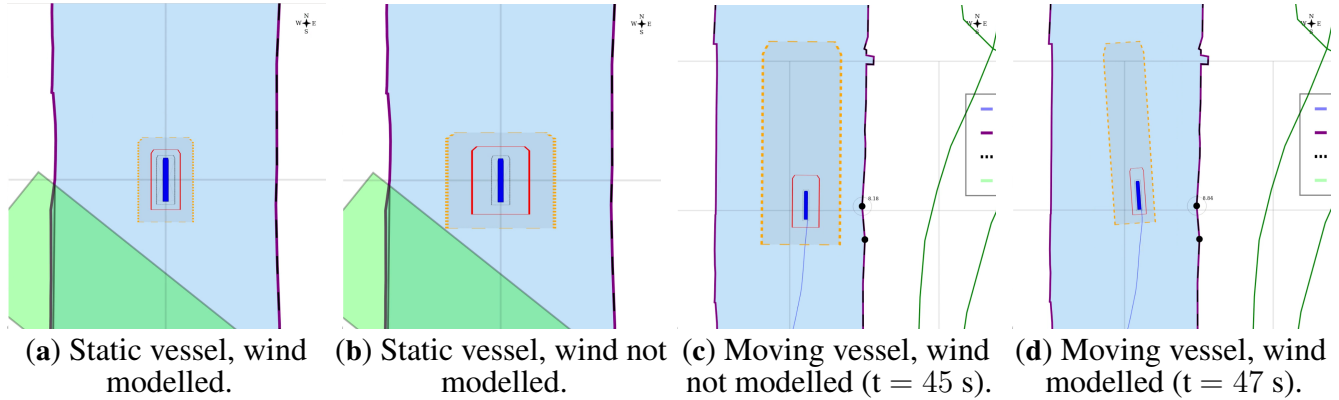


Figure 10. Dynamically allocated tolerances to **SD1** and **SD2** via a main geometry–motion relation (with hydrodynamical model of the vessel), both for a static vessel (a, b) and a moving vessel (c, d).

For the simulator, by default, wind is modelled. The video shows how gusts of wind (of 10 m/s , or 4–5 Beaufort), can have a significant impact on the behaviour of the vessel. For example, the vessel drifts several meters in the x -direction without any thrust forces applied in this direction.

4.4 Experiment 4

Figure 11 shows four snapshots of the Supplementary Video S4 which illustrates the anticipation domain of **SD2** as a cartoceptive relation with the navbounds features in **MD0**. These domains can help a robot anticipate by triggering discrete control tasks based on geometry relations such as *within* or *intersect*. For example, when no perception sensors are available, and another vessel’s AIS position claims to be *within* this range, it can trigger a lane shift, as demonstrated in Section 4.7. Another use case for this domain is to detect, or link, known shoreline landmarks, e.g., *Points* integrated in the map, in the perception sensor data (geometry–perception), or vice versa.

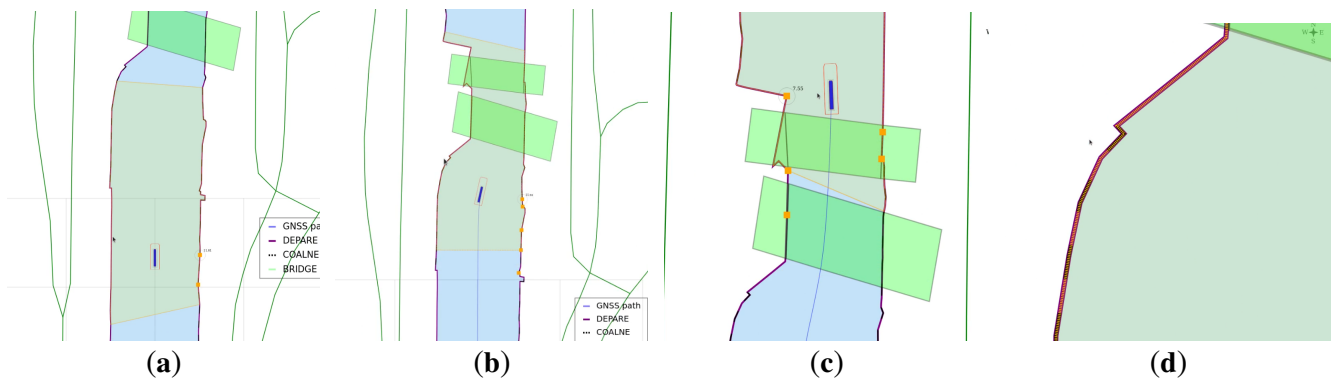


Figure 11. Anticipation domain declaration of **SD2** via a main cartoceptive geometry–geometry relation.

4.5 Experiment 5

Figure 12 shows four snapshots of the Supplementary Video S5 which illustrates the shortest distance between the `Point` entities in vessel's **SD0** and the local coordinates of the `navbounds` features in **MD0**. By means of dynamically allocating a semantic tag to each closest `Point` entity, it allows vessel

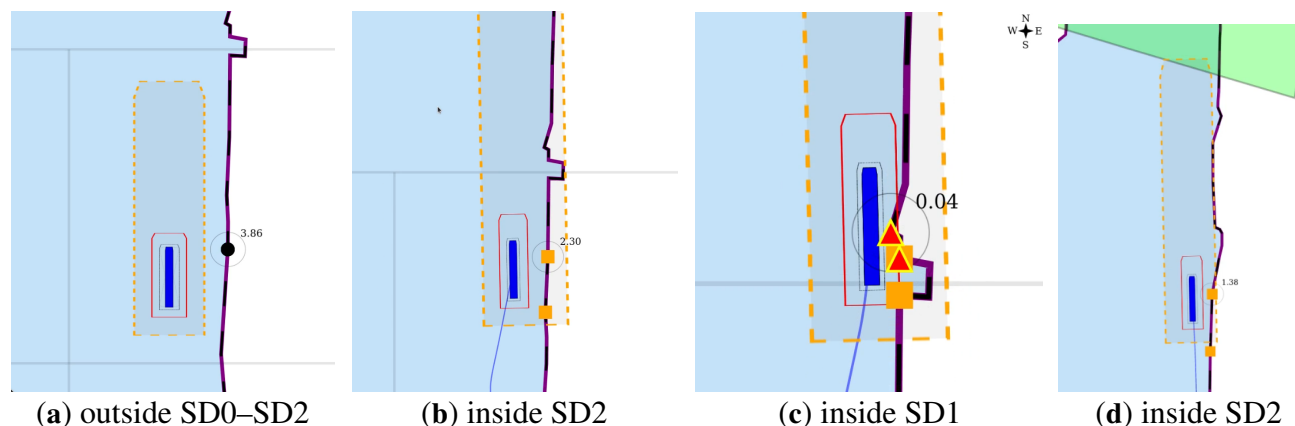


Figure 12. Dynamic shortest distance between vessel and shoreline additions to **MD0** via a main geometry–geometry relation.

(sub)systems, as well as other actors within the operating range, to unambiguously identify this point, as part of a feature. Furthermore, it can be seen that whenever the vessel's danger zone **SD1**, related to the minimum aided deacceleration distance (see Listing 12), intersects with the shoreline in **MD0**, the vessel almost hits the shoreline. The added tolerances on this zone keep the vessel from colliding with the shoreline, although this particular scenario should, obviously, be avoided when executing the `move-along-channel` task.

4.6 Experiment 6

Figure 13 shows four snapshots of the Supplementary Video S6 which illustrates the lane shift primitive. This lane shift primitive, integrated in **MD1**, provides semantic information in the form of additional geometric entities and constraint relations for the vessel to simply follow the COLREG rule in a highly automated environment.

4.7 Experiment 7

Figure 14 lists eight snapshots of the Supplementary Video S7 which illustrates a combination of situations and relations discussed in the previous experiments.

After passing the first vessel, the geometry corresponding to the motion relation of **SD2** triggers a “back-to-centre” lane switch. After passing the second vessel, the geometry–geometry relation between **MD0** and **MD1**, in combination with the current position of the vessel in the map, overrules the “back-to-centre” lane switch. Additional knowledge about the lane switch, i.e., switching lanes takes about 25 metres at this speed, determines that a lane switch *before* the channel narrowing is not very efficient, or safe. Note that in this case, it is still feasible. Therefore, in the second case, the vessel stays in the switched side-lane for passing the bridge, based on the cartoceptive information provided by the semantic map.

The shared semantic map serves as a mediator, after being agreed upon by the actors involved, that is, all actors should be able to interpret the information on the map unambiguously in order to proceed. Once the agreement is reached, the information provided by the map, given there is sufficient, model-compliant

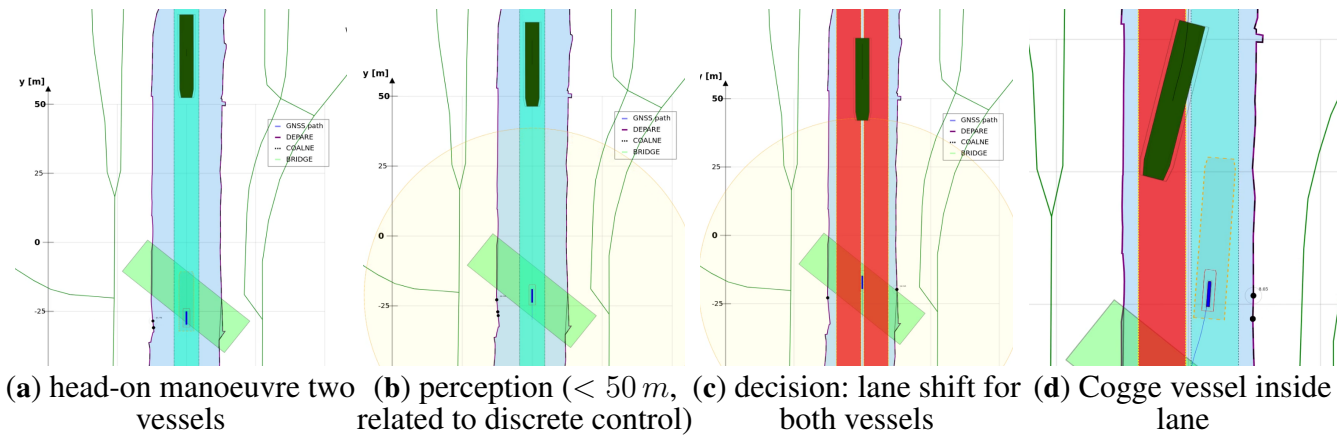


Figure 13. Lane shift primitive, triggered by geometry–perception relation (exteroceptive sensor subsystem). Lanes with vessel *inside* is shown in transparent green; lanes with vessels *outside* are shown in red.

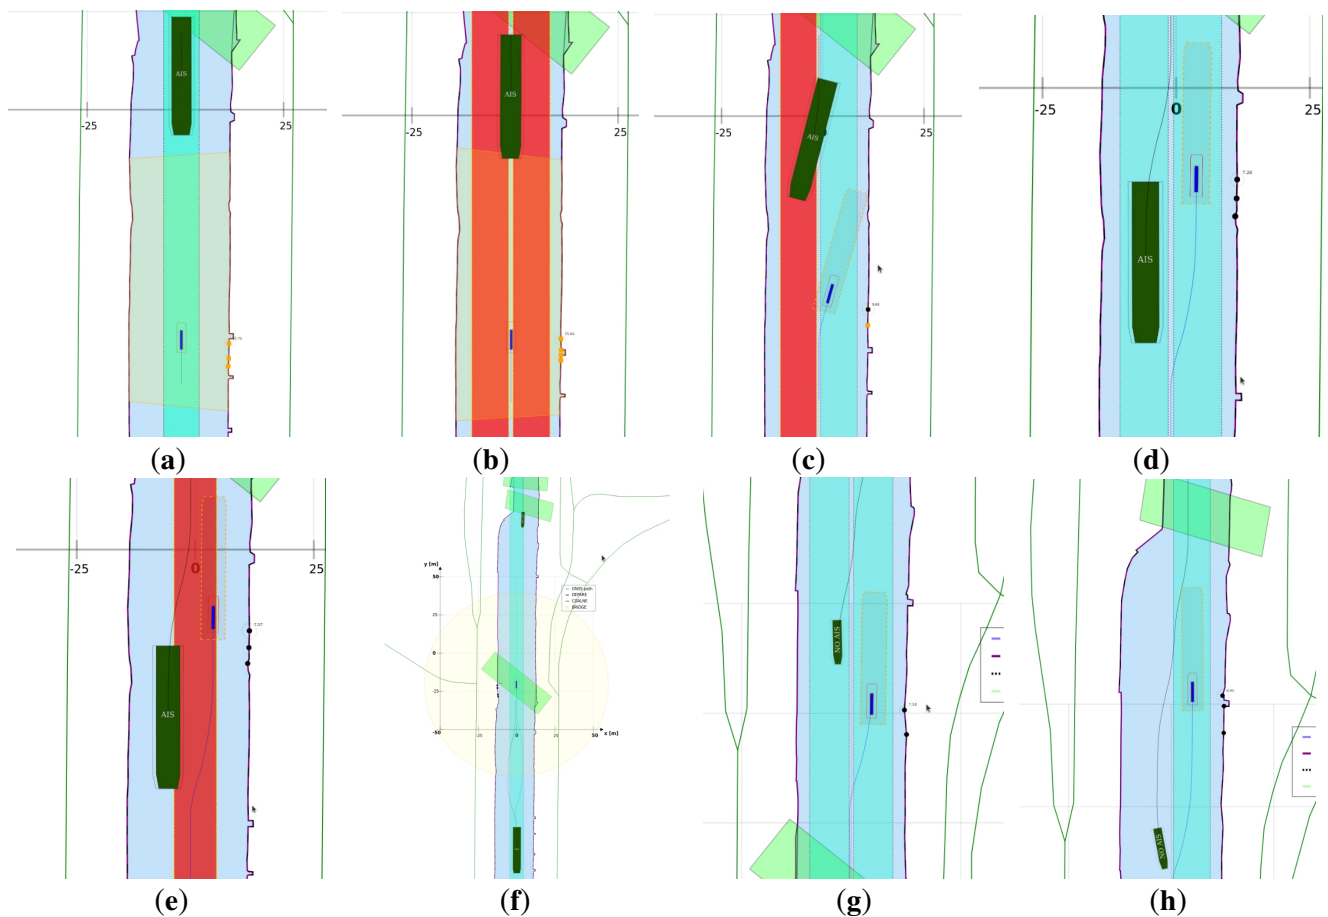


Figure 14. Combination of situations and relations of previous experiments, with additional sensor subsystem relations

input from each actor, could be used in the discrete controllers of the respective vessels. In this case, the dynamic lane geometry is used as a set of controller constraints. This includes geometric constraints as well as tolerances, desired navigation direction for each lane, speed limits, among other relevant (shared) data.

5 DISCUSSION

In this paper, a set of semantic world models was presented within the context of IWT. These models, and the corresponding ability for higher-level, situational-aware, reasoning, are considered a necessary component for explainable engineering systems, and higher levels of *shared* automation.

In Section 3.4, several assumptions were discussed with respect to implementation. It is important to note that model compliance is not yet validated at runtime. Similarly, a comprehensive share and update policy is neither discussed nor implemented. This paper is considered a fundamental basis towards such developments, hence, these developments are considered to be future work. Furthermore, the experiments are conducted in a simulation environment. As such, it is rather straightforward to make all entities in a certain local environment compliant to a set of world models. In reality, this will rarely be the case, hence, research on how to correctly handle “unknown” entities and features is required.

As a *first* next step, real-life experiments will be conducted in a *controlled* environment, that is, an environment in which only model-conform entities operate, such as vessels from our research fleet. Manoeuvres in situations similar to the ones discussed in this paper will be performed. To this end, a perception-based control strategy without any semantic reasoning will serve as a benchmark. Then, additional experiments with actors that have access to a cartoceptive subsystem, i.e. a (shared) semantic map, and corresponding world models, will test against that benchmark. These experiments will be performed with both remote controlled vessels, and with autonomous vessels. Regarding the former, it is expected that visual feedback of, for instance, a lane shift primitive, will help the remote operator to safely (smaller error margins) and efficiently (smaller manoeuvre time) navigate the vessel. With respect to the latter, it is expected that such shared, discrete control functionality will reduce overall complexity of the highly automated environment, and as such improve safety, explainability and performance. Especially in close encounter manoeuvring, higher-level control decisions based on the shared map are expected to allow a vessel to quicker anticipate, and thus better avoid potential collisions.

The suggested policies and methods to define and use these semantic world models aim to be a stepping stone towards semantic knowledge graphs, and graph operations. The experiments focus on reacting on a situation, by a mediator, at runtime. Developing a graph model, and adding online behaviour to the world models by means of various graph operators, is also considered future work.

5.1 Conclusion

The authors of this work believe that highly automated IWT can benefit significantly from well-designed world models, both internal and external. A collaborative effort from research institutions, standardisation committees, and the IWT industry is absolutely vital to develop a workable set of models and relations that can be tested and integrated in daily operations. The existence of such internal world models of the robot, and external world models of a local environment, can significantly enhance safe, cost-effective (shared) automation procedures. It provides a necessary complementary extension to the existing legacy models and standards, such as AIS or NMEA. As such, it can accommodate higher levels of automation, as well as better task anticipation by humans and robots. Explainable operational (meta) data will help a mediator to reason about particular situations, and take over control whenever necessary. Furthermore, formal models can be a crucial part in regulatory frameworks for IWT. The allowed level of automation for a robot can depend on its capability to comply to a formal set of standardised models, and thus to be able to justify its automated decision making to a reasonable extent. As such, working towards a more generic, formal set of models, in close collaboration with policy makers, waterway administrators, and IWT companies, is a challenging goal for the near future.

NOMENCLATURE

- **IW**: Inland Waterway(s)
- **IWT**: Inland Waterway Transport
- **SD**: Ship Domain
- **MD**: Map Domain
- **(I)ENC**: (Inland) Electronic Navigational Charts

CONFLICT OF INTEREST STATEMENT

The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

AUTHOR CONTRIBUTIONS

Conceptualisation, S.V.B., G.P., H.B., P.P., and P.S.; methodology, S.V.B., H.B., and G.P.; software, S.V.B.; validation, S.V.B., and G.P.; investigation, S.V.B., G.P., resources, H.B.; writing – original draft preparation, S.V.B., G.P.; writing – review and editing, S.V.B., G.P., H.B., P.P., and P.S.; visualization, S.V.B., and G.P.; supervision, H.B., P.P., and P.S.; All authors have read and agreed to the published version of the manuscript.

FUNDING

The Cogge was funded by the EFRO-Flanders project “Autonoom Varen in de Westhoek.” Additional instrumentation for *the Cogge* as well as shoreside infrastructure was funded by (i) the Interreg North Sea Region project “AVATAR”, (ii) the Horizon 2020 project “IW-NET”, and (iii) the VLAIO (ICON) project “SSAVE”.

SUPPLEMENTAL DATA

A list of supplementary materials referred to in this work:

- S0: Video – Research Vessel Cogge in operation
- S1: Video – Introduction zeroth level ship and map domain.
- S2: Video – Motion based **SD1** and **SD2**.
- S3: Video – Tolerances for **SD1** and **SD2** based on the hydrodynamic model with or without wind.
- S4: Video – Cartoceptive geometry relation for SD2 based on `navbounds` map features in **MD0**.
- S5: Video – Shortest distance, based on the cartoceptive geometry relation with **SD0**, i.e. its Intersection with `navbounds` map features in **MD0**.
- S6: Video – Lane shift primitive, in compliance with COLREG head-on vessel operations.
- S7: Video – Combination of previous experiments, with additional sensor subsystem relations.

REFERENCES

- Argüelles, R. P., García Maza, J. A., Martín, F. M., and Bartolomé, M. (2021). Ship-to-ship dialogues and agreements for collision risk reduction. *Journal of navigation*, 1–18
- AUTOBarge (2021). The autobarge project. <https://etn-autobarge.eu/project/>
- AVATAR (2021). The avatar project. <https://northsearegion.eu/avatar/>. AVATAR is a project co-funded by the North Sea Region Programme 2014–2020.

- Blanke, M. (1981). *Ship Propulsion Losses Related to Automatic Steering and Prime Mover Control*. Ph.D. thesis, Technical University of Denmark. ISBN 87-87950-14-6
- Bruyninckx, H. (2021). *Design of Complicated Systems* (Online book). Work in progress. URL: <https://robmosys.pages.gitlab.kuleuven.be/>
- E. Verbergh (2019). *Innovative inland navigation*. Tech. rep., Department of Transport and Regional Economics, University of Antwerp
- Essen, H. V., Schrotten, A., Otten, M., Sutter, D., Schreyer, C., Zandonella, R., et al. (2016). Developing a cost calculation model for inland navigation. *Research in Transportation Business & Management*, 64–74
- European Commission (2019). *Mobility and transport: promotion of Inland Waterways*. Tech. rep.,
- Fedyavsky, K. K. and Sobolev, G. V. (1964). *Control and Stability in Ship Design* (State Union Shipbuilding Industry Publishing House)
- Fossen, T. I. (1991). *Nonlinear Modeling and Control of Underwater Vehicles*. phdthesis, Norwegian Institute of Technology
- Fossen, T. I. (1994). *Guidance and Control of Ocean Vehicles* (John Wiley & Sons. Ltd.)
- Fossen, T. I. (2011). *Handbook of Marine Craft Hydrodynamics and Motion Control* (Chichester, UK: John Wiley & Sons, Ltd)
- Fossen, T. I. and Fjellstad, O.-E. (1995). Nonlinear modelling of marine vehicles in 6 degrees of freedom. *Mathematical Modelling Of Systems*
- Fuji, J. and Tanaka, K. (1971). Traffic capacity. *J. Navig* 24, 543–552
- Hansen, M. G., Jensen, T. K., Lehn-Schiøler, T., Melchild, K., Rasmussen, F. M., and Ennemark, F. (2013). Empirical ship domain based on ais data. *Journal of navigation* 66, 931–940
- Huang, Y., Chen, L., Chen, P., Negenborn, R. R., and van Gelder, P. (2020). Ship collision avoidance methods: State-of-the-art. *Safety science* 121, 451–473
- IMO (2001). *Resolution A.918(22). Standard Marine Communication Phrases*. Tech. rep., International Maritime Organization
- Isherwood, R. M. (1972). Wind resistance of merchant ships. *RINA Transcripts* 115, 327–338
- IW-NET (2021). The iw-net project. <https://www.isl.org/en/projects/iw-net>. This project has received funding from the European Union’s Horizon 2020 research and innovation programme under grant agreement No 861377.
- Kallas, S. (2011). *Transport 2050: Comission outlines ambitious plan to increase mobility and reduce emmissions*. Tech. Rep. March,
- Kotzé, M., Bin Junaid, A., Afzal, M. R., Peeters, G., and Slaets, P. (2019). Use of uncertainty and zones for vessel and operation in inland and waterways. In *Journal of Physics: Conference Series* (IOP Publishing), vol. 1357, 012031. doi:10.1088/1742-6596/1357/1/012031
- Landsiedel, C., Rieser, V., Walter, M., and Wollherr, D. (2017). A review of spatial reasoning and interaction for real-world robotics. *Advanced robotics* 31, 222–242
- Lang, D., Friedmann, S., Haselich, M., and Paulus, D. (2014). Definition of semantic maps for outdoor robotic tasks. In *2014 IEEE International Conference on Robotics and Biomimetics (ROBIO 2014)* (IEEE), 2547–2552
- Lewis, E. V. (ed.) (1989). *Principles of naval architecture. Vol. 2, Resistance, propulsion and vibration* (Jersey City, N.J.: Society of Naval Architects and Marine Engineers), 2nd rev. ed. edn.
- Liu, J., Zhou, F., Li, Z., Wang, M., and Liu, R. W. (2016). Dynamic ship domain models for capacity analysis of restricted water channels. *Journal of navigation* 69, 481–503

- Nüchter, A. and Hertzberg, J. (2008). Towards semantic maps for mobile robots. *Robotics and autonomous systems* 56, 915–926
- Peeters, G. (2021). *Towards Unmanned Inland Shipping*. phdthesis, KU Leuven. URL: <https://lirias.kuleuven.be/3391744?limo=0>
- Peeters, G., Afzal, M. R., Vanierschot, M., Boonen, R., and Slaets, P. (2020a). Model structures and identification for fully embedded thrusters: 360-degrees-steerable steering-grid and four-channel thrusters. *Journal of Marine Science and Engineering* 8. doi:10.3390/jmse8030220
- Peeters, G., Kotzé, M., Afzal, M. R., Catoor, T., Van Baelen, S., Geenen, P., et al. (2020b). An unmanned inland cargo vessel: Design, build, and experiments. *Ocean Engineering* 201, 17. doi:10.1016/j.oceaneng.2020.107056
- Peeters, G., Van Baelen, S., Yayla, G., Catoor, T., Afzal, M. R., Christofakis, C., et al. (2020c). Decoupled hydrodynamic models and their outdoor identification for an unmanned inland cargo vessel with embedded fully rotatable thrusters. *Journal of Marine Science and Engineering* 8. doi:10.3390/jmse8110889
- Peeters, G., Yayla, G., Catoor, T., Van Baelen, S., Afzal, M. R., Christofakis, C., et al. (2020d). An inland shore control centre for monitoring or controlling unmanned inland cargo vessels. *Journal of Marine Science and Engineering* 8. doi:10.3390/jmse8100758. With joined first authors G. Peeters and G. Yayla.
- SINTEF (2020). The hull-to-hull (h2h) project. <https://www.sintef.no/projectweb/hull-to-hull/>. This project has received funding from the European GNSS Agency under the European Union’s Horizon 2020 research and innovation programme grant agreement No 775998.
- SNAME (1950). *Nomenclature for Treating the Motion of a Submerged Body Through a Fluid*. Tech. rep., The Society of Naval Architects and Marine Engineers. In: Technical and Research Bulletin No. 1–5.
- Sotiralis, P., Ventikos, N., Hamann, R., Golyshev, P., and Teixeira, A. (2016). Incorporation of human factors into ship collision risk models focusing on human centred design aspects. *Reliability engineering & system safety* 156, 210–227
- Sys, C. and Vanelslander, T. (2011). *Future Challenges for Inland Navigation*. No. 978 90 5487 845 4 in (UPA)
- Szlapczynski, R. and Szlapczynska, J. (2017). Review of ship safety domains: Models and applications. *Ocean engineering* 145, 277–289
- Tavasszy, L. A., Behdani, B., and Konings, R. (2015). Intermodality and synchromodality. https://papers.ssrn.com/sol3/papers.cfm?abstract_id=2592888
- The European Commission (2019). Watertruck+. <http://www.watertruckplus.eu/>
- Tsimplis, M. and Papadas, S. (2019). Information technology in navigation: Problems in legal implementation and liability. *Journal of navigation* 72, 833–849
- Tsou, M.-C. (2016). Multi-target collision avoidance route planning under an ecdis framework. *Ocean engineering* 121, 268–278
- Ung, S.-T. (2019). Evaluation of human error contribution to oil tanker collision using fault tree analysis and modified fuzzy bayesian network based cream. *Ocean engineering* 179, 159–172
- van Essen, H. (2018). *Sustainable Transport Infrastructure Charging and Internalisation of Transport Externalities*. Tech. Rep. December,
- Verbergh, E. (2019). *INN-IN: Innovative Inland Navigation*. Tech. rep., University of Antwerp, Department of Transport and Regional Economics
- Wang, Y. and Chin, H.-C. (2016). An empirically-calibrated ship domain as a safety criterion for navigation in confined waters. *Journal of navigation* 69, 257–276

- Weng, J., Yang, D., Chai, T., and Fu, S. (2019). Investigation of occurrence likelihood of human errors in shipping operations. *Ocean engineering* 182, 28–37
- Yildirim, U., Basar, E., and Ugurlu, O. (2019). Assessment of collisions and grounding accidents with human factors analysis and classification system (hfacs) and statistical methods. *Safety science* 119, 412–425

Appendices

A HYDRODYNAMIC MOTION MODEL COGGE

A.1 Full components form

$$\begin{aligned}
 & \left(\underbrace{\begin{bmatrix} m & 0 & 0 \\ 0 & m & mx_g \\ 0 & mx_g & I_z \end{bmatrix}}_{\mathbf{M}_{RB}} + \underbrace{\begin{bmatrix} -X_{\dot{u}} & 0 & 0 \\ 0 & -Y_{\dot{v}} & -Y_{\dot{r}} \\ 0 & -N_{\dot{v}} & -N_{\dot{r}} \end{bmatrix}}_{\mathbf{M}_A} \right) \begin{bmatrix} \dot{u} \\ \dot{v} \\ \dot{r} \end{bmatrix} + \\
 & \left(\underbrace{\begin{bmatrix} 0 & 0 & -m(x_g r + v) \\ 0 & 0 & mu \\ m(x_g r + v) & -mu & 0 \end{bmatrix}}_{\mathbf{C}_{RB}} + \underbrace{\begin{bmatrix} 0 & 0 & Y_{\dot{v}}v + \frac{1}{2}(Y_{\dot{r}} + N_{\dot{v}})r \\ 0 & 0 & -X_{\dot{u}}u \\ -Y_{\dot{v}}v - \frac{1}{2}(Y_{\dot{r}} + N_{\dot{v}})r & X_{\dot{u}}u & 0 \end{bmatrix}}_{\mathbf{C}_A} \right) \begin{bmatrix} u \\ v \\ r \end{bmatrix} + \\
 & \left(\underbrace{\begin{bmatrix} -X_{|u|u}|u| & 0 & 0 \\ 0 & -Y_{|v|v}|v| & -Y_{|v|r}|v| \\ 0 & -N_{|v|v}|v| & -N_{|v|r}|v| \end{bmatrix}}_{\mathbf{D}_N} + \underbrace{\begin{bmatrix} -X_u & 0 & 0 \\ 0 & -Y_v & -Y_r \\ 0 & -N_v & -N_r \end{bmatrix}}_{\mathbf{D}_L} \right) \begin{bmatrix} u \\ v \\ r \end{bmatrix} = \begin{bmatrix} \tau_X^c \\ \tau_Y^c \\ \tau_N^c \end{bmatrix} + \begin{bmatrix} \tau_X^w \\ \tau_Y^w \\ \tau_N^w \end{bmatrix} \quad (10)
 \end{aligned}$$

With:

$$\tau_{control} = \begin{bmatrix} \tau_X^c \\ \tau_Y^c \\ \tau_N^c \end{bmatrix} = \begin{bmatrix} T_j^x(n_j, \alpha_j) + T_c^x(n_c, \alpha_c) \\ T_j^y(n_j, \alpha_j) + T_c^y(n_c, \alpha_c) \\ L_j^x \times T_j^y(n_j, \alpha_j) + L_c^x \times T_c^y(n_c, \alpha_c) \end{bmatrix}, \tau_{wind} = \begin{bmatrix} \tau_X^w \\ \tau_Y^w \\ \tau_N^w \end{bmatrix} = \begin{bmatrix} \dots \\ \dots \\ \dots \end{bmatrix}. \quad (11)$$

A.2 Identified hydrodynamic coefficients

As mentioned in Section 3.1.3, the hydrodynamic model of *the Cogge* has threshold speed values (see Listing 11), which trigger the configuration of the damping matrices. For the higher velocity regime of *the Cogge*, meaning, $u > 0.5 \frac{\text{m}}{\text{s}}$, and $v > 0.15 \frac{\text{m}}{\text{s}}$, the value of the coefficients for $\mathbf{M}_{RB}$, $\mathbf{C}_{RB}$, $\mathbf{M}_A$, $\mathbf{C}_A$, $\mathbf{D}_N$, and $\mathbf{D}_L$ can be found in the Listing 9. The diagonal terms (except $N_{|v|r}|v|$) of these matrices are based on the $\mathcal{M}(\theta_u^e)$, $\mathcal{M}(\theta_v^e)$, and $\mathcal{M}(\theta_r^f)$ model structures, identified and discussed in Peeters et al. (2020c). The remaining off-diagonal terms were manually tuned with reference to a port and starboard side turning circle.

For the lower speed regime, $\mathbf{D}(\nu)$ switches from $\mathbf{D}_N + \mathbf{D}_L$ to $\mathbf{D}_L$. Accordingly, all the terms of $\mathbf{D}_N$ become zero. The terms of $\mathbf{D}_L$ change to $X_u = 39.3$, $Y_v = 226.31$, based on $\mathcal{M}(\theta_u^f)$, $\mathcal{M}(\theta_v^f)$ from Peeters et al. (2020c), note that the yaw motion already had a linear damping with respect to the yaw-rate.

As mentioned in Section 2.4, bollard pull thrust models suffice in the context of this work. Therefore, two look-up-table actuation models were implemented based on the bollard pull data discussed in Peeters et al. (2020a). Note that for the stern thruster, the data were cleaned accordingly: constant propeller rate for each angular data set, and the assumption that the thrust force at zero degrees control angle is aligned with this angle.

Hydrodynamic coefficients used in this work are shown in Listing 19:

Listing 19. Hydrodynamical coefficients

```
{
  m : 590
  I_z : 878 ,
  X_udot : -75,
  Y_vdot : -583,
  N_rdot : -970,
  Y_rdot : -38.34,
  N_vdot : 20.87,
  X_|u|u : -36.3,
  Y_|v|v : -682.7,
  N_|r|r : -1282.9,
  Y_|r|v : -343.02,
  Y_|v|r : 357.46,
  Y_|r|r : 477.53,
  N_|v|v : 93.6,
  N_|r|v : 0,
  N_|v|r : -1921.12,
  X_u : -3.77,
  Y_v : -3.26,
  N_r : -342.7,
  Y_r : -490.77,
  N_v : 442.32,
  CD_t : 0.85,
  CD_l_0 : 0.55,
  CD_l_pi : 0.65,
  delta : 0.6,
  kappa : 1.4
}
```